



# Instruction

3. Removing a spool from a bonding machine ~ Storing in a case


TANAKA DENSHI KOGYO K.K  
Quality Assurance Dpt.

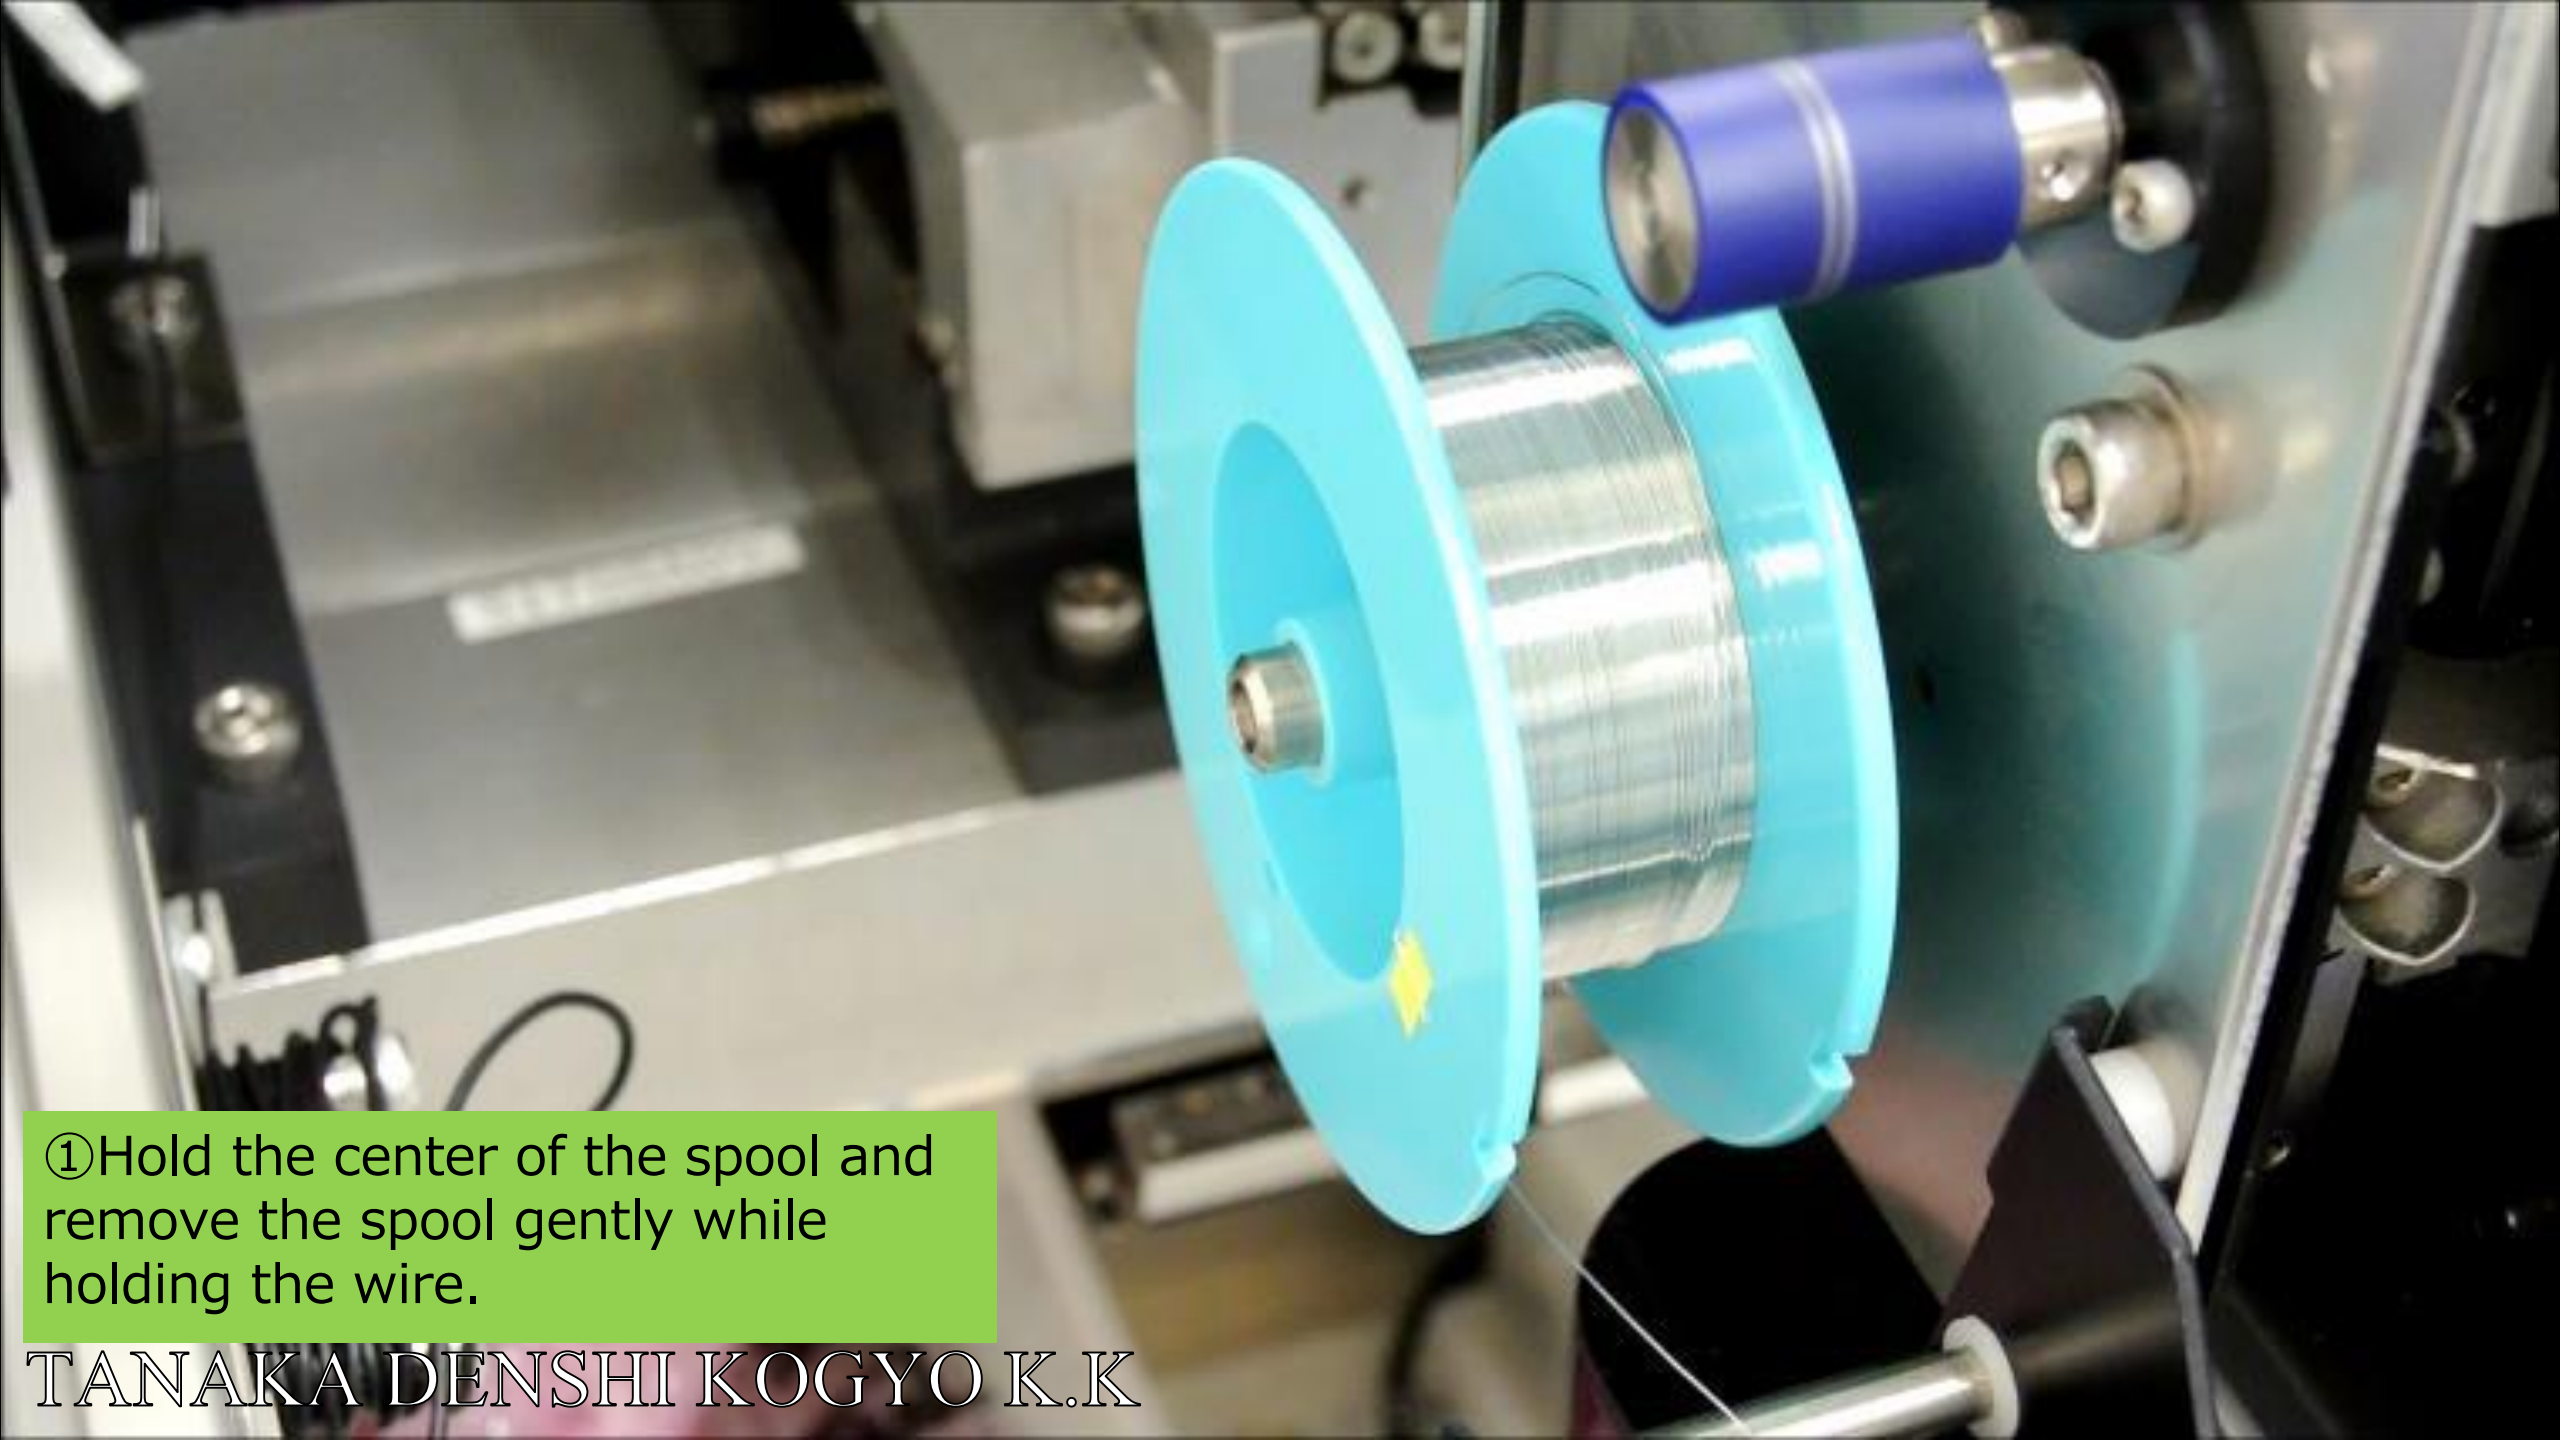


① Hold the center of the spool and remove the spool gently while holding the wire.

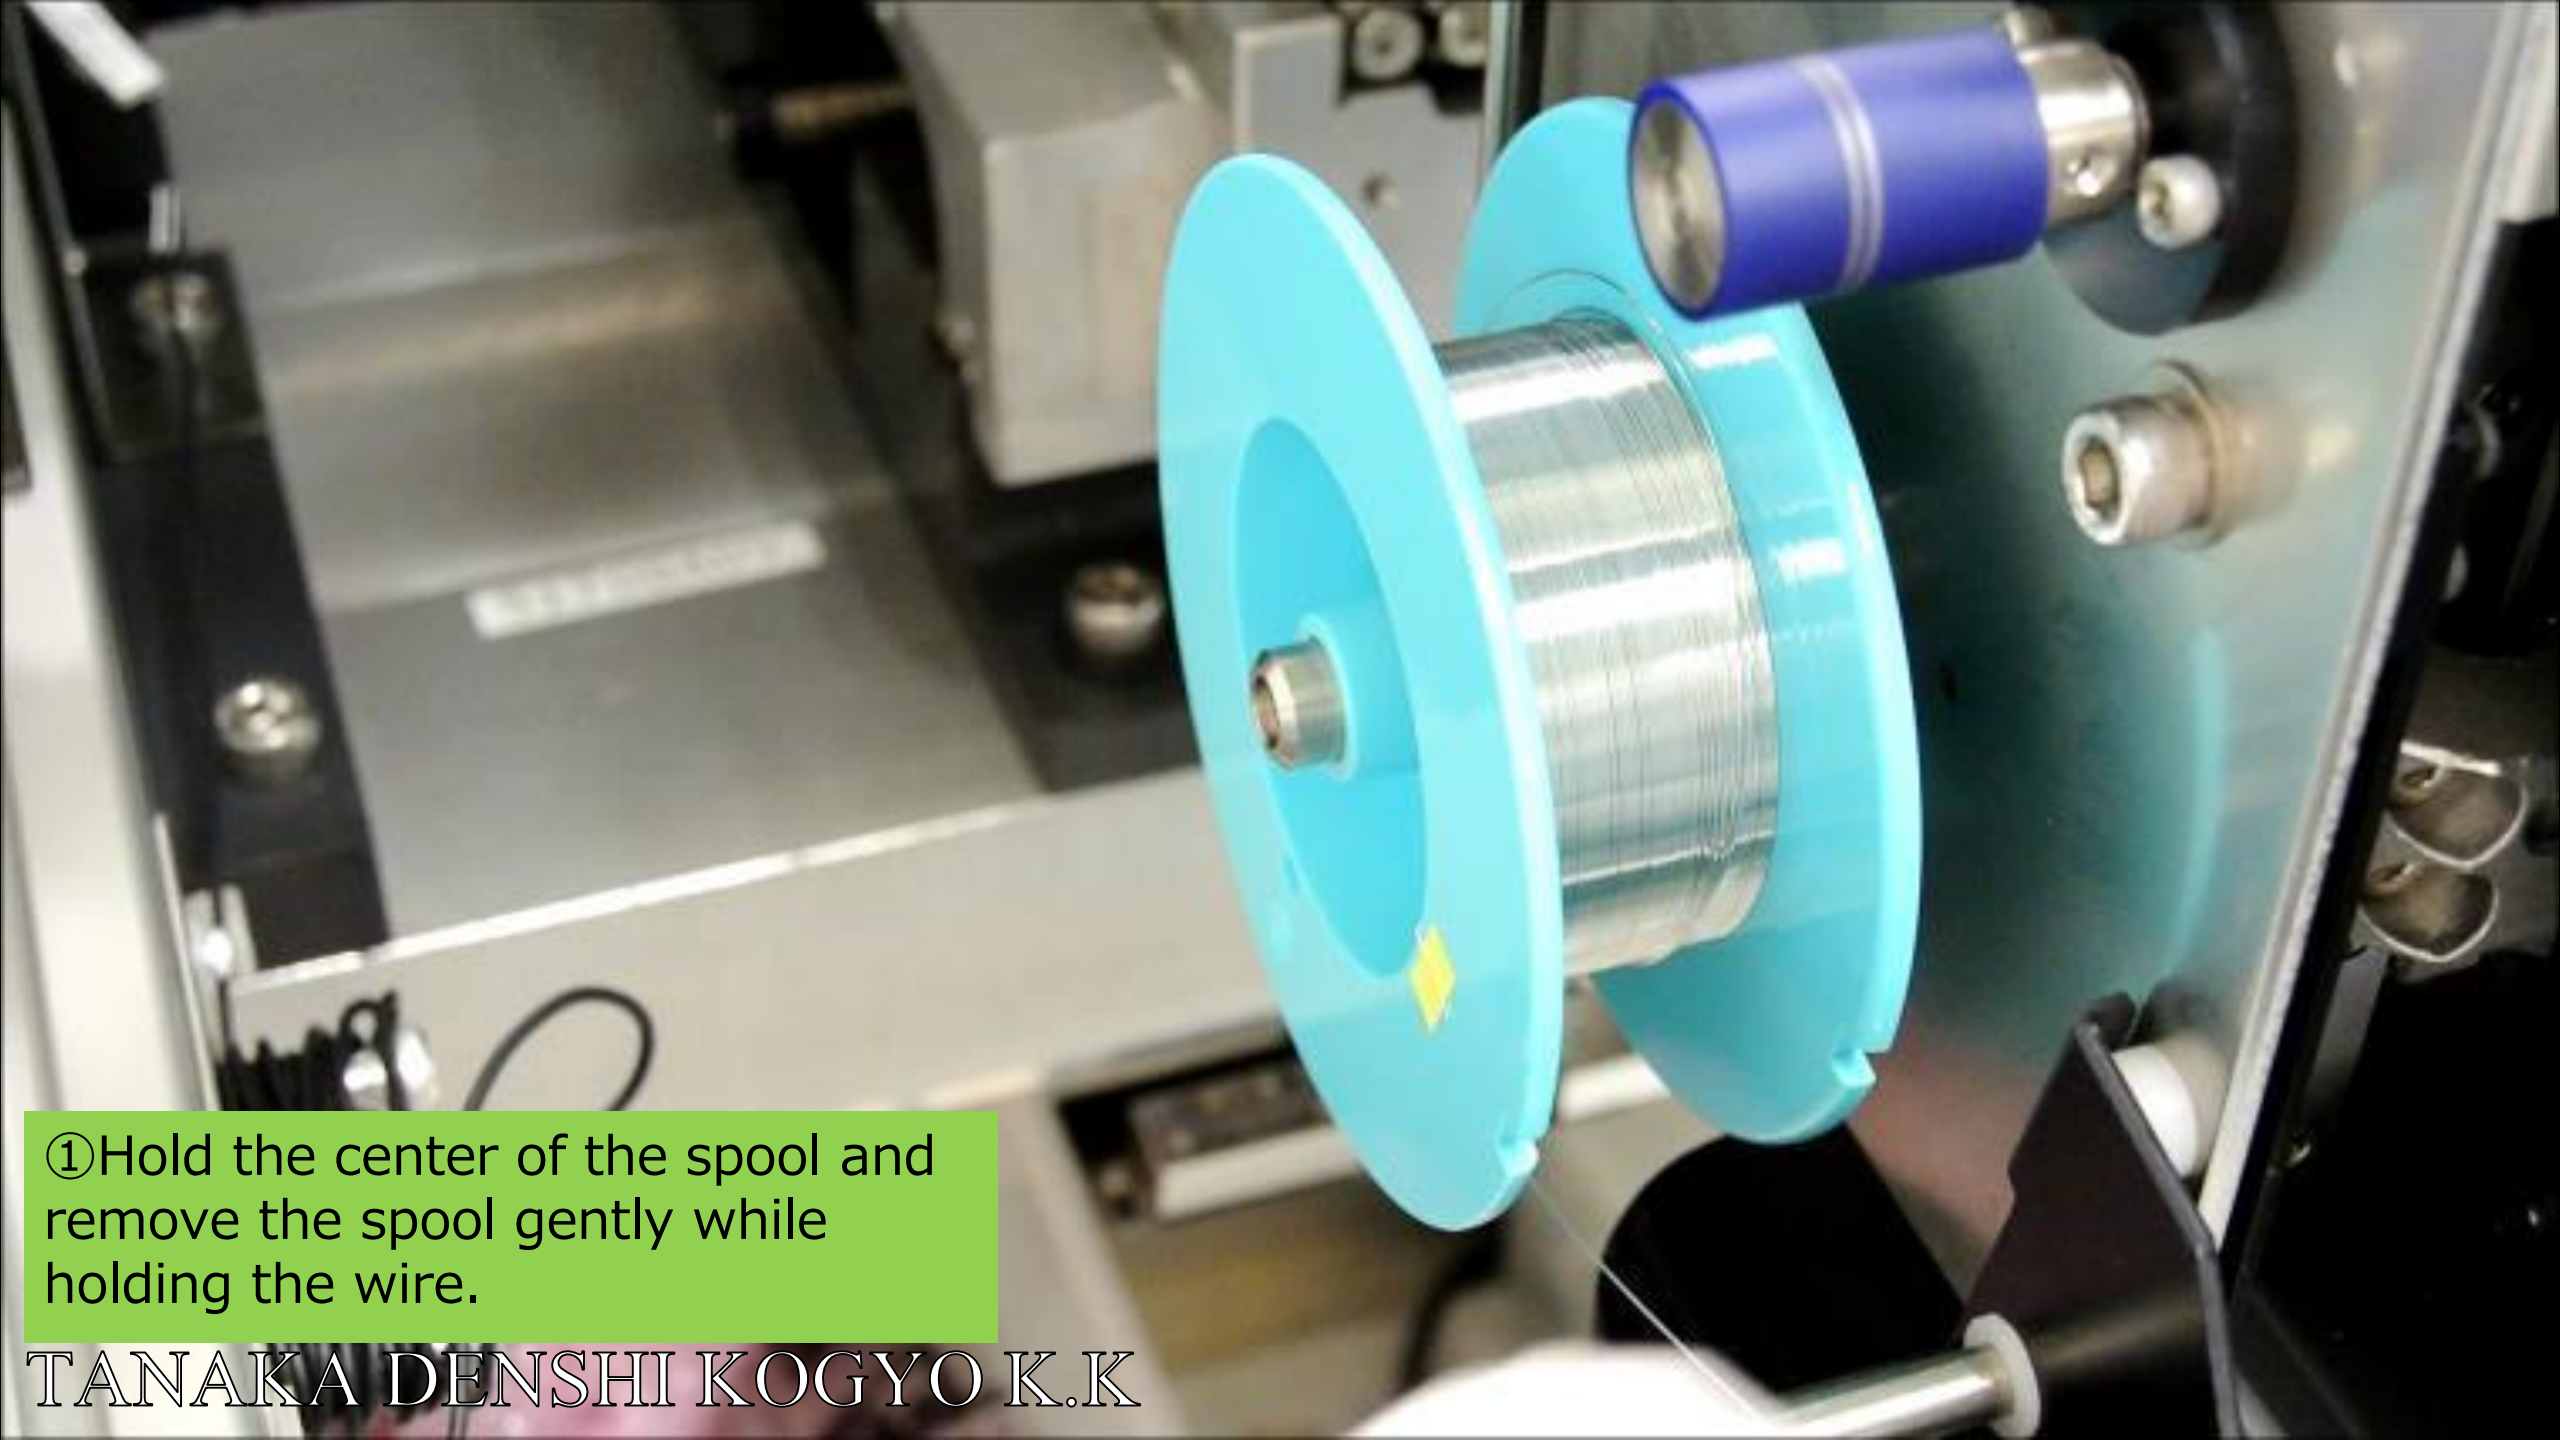


① Hold the center of the spool and remove the spool gently while holding the wire.

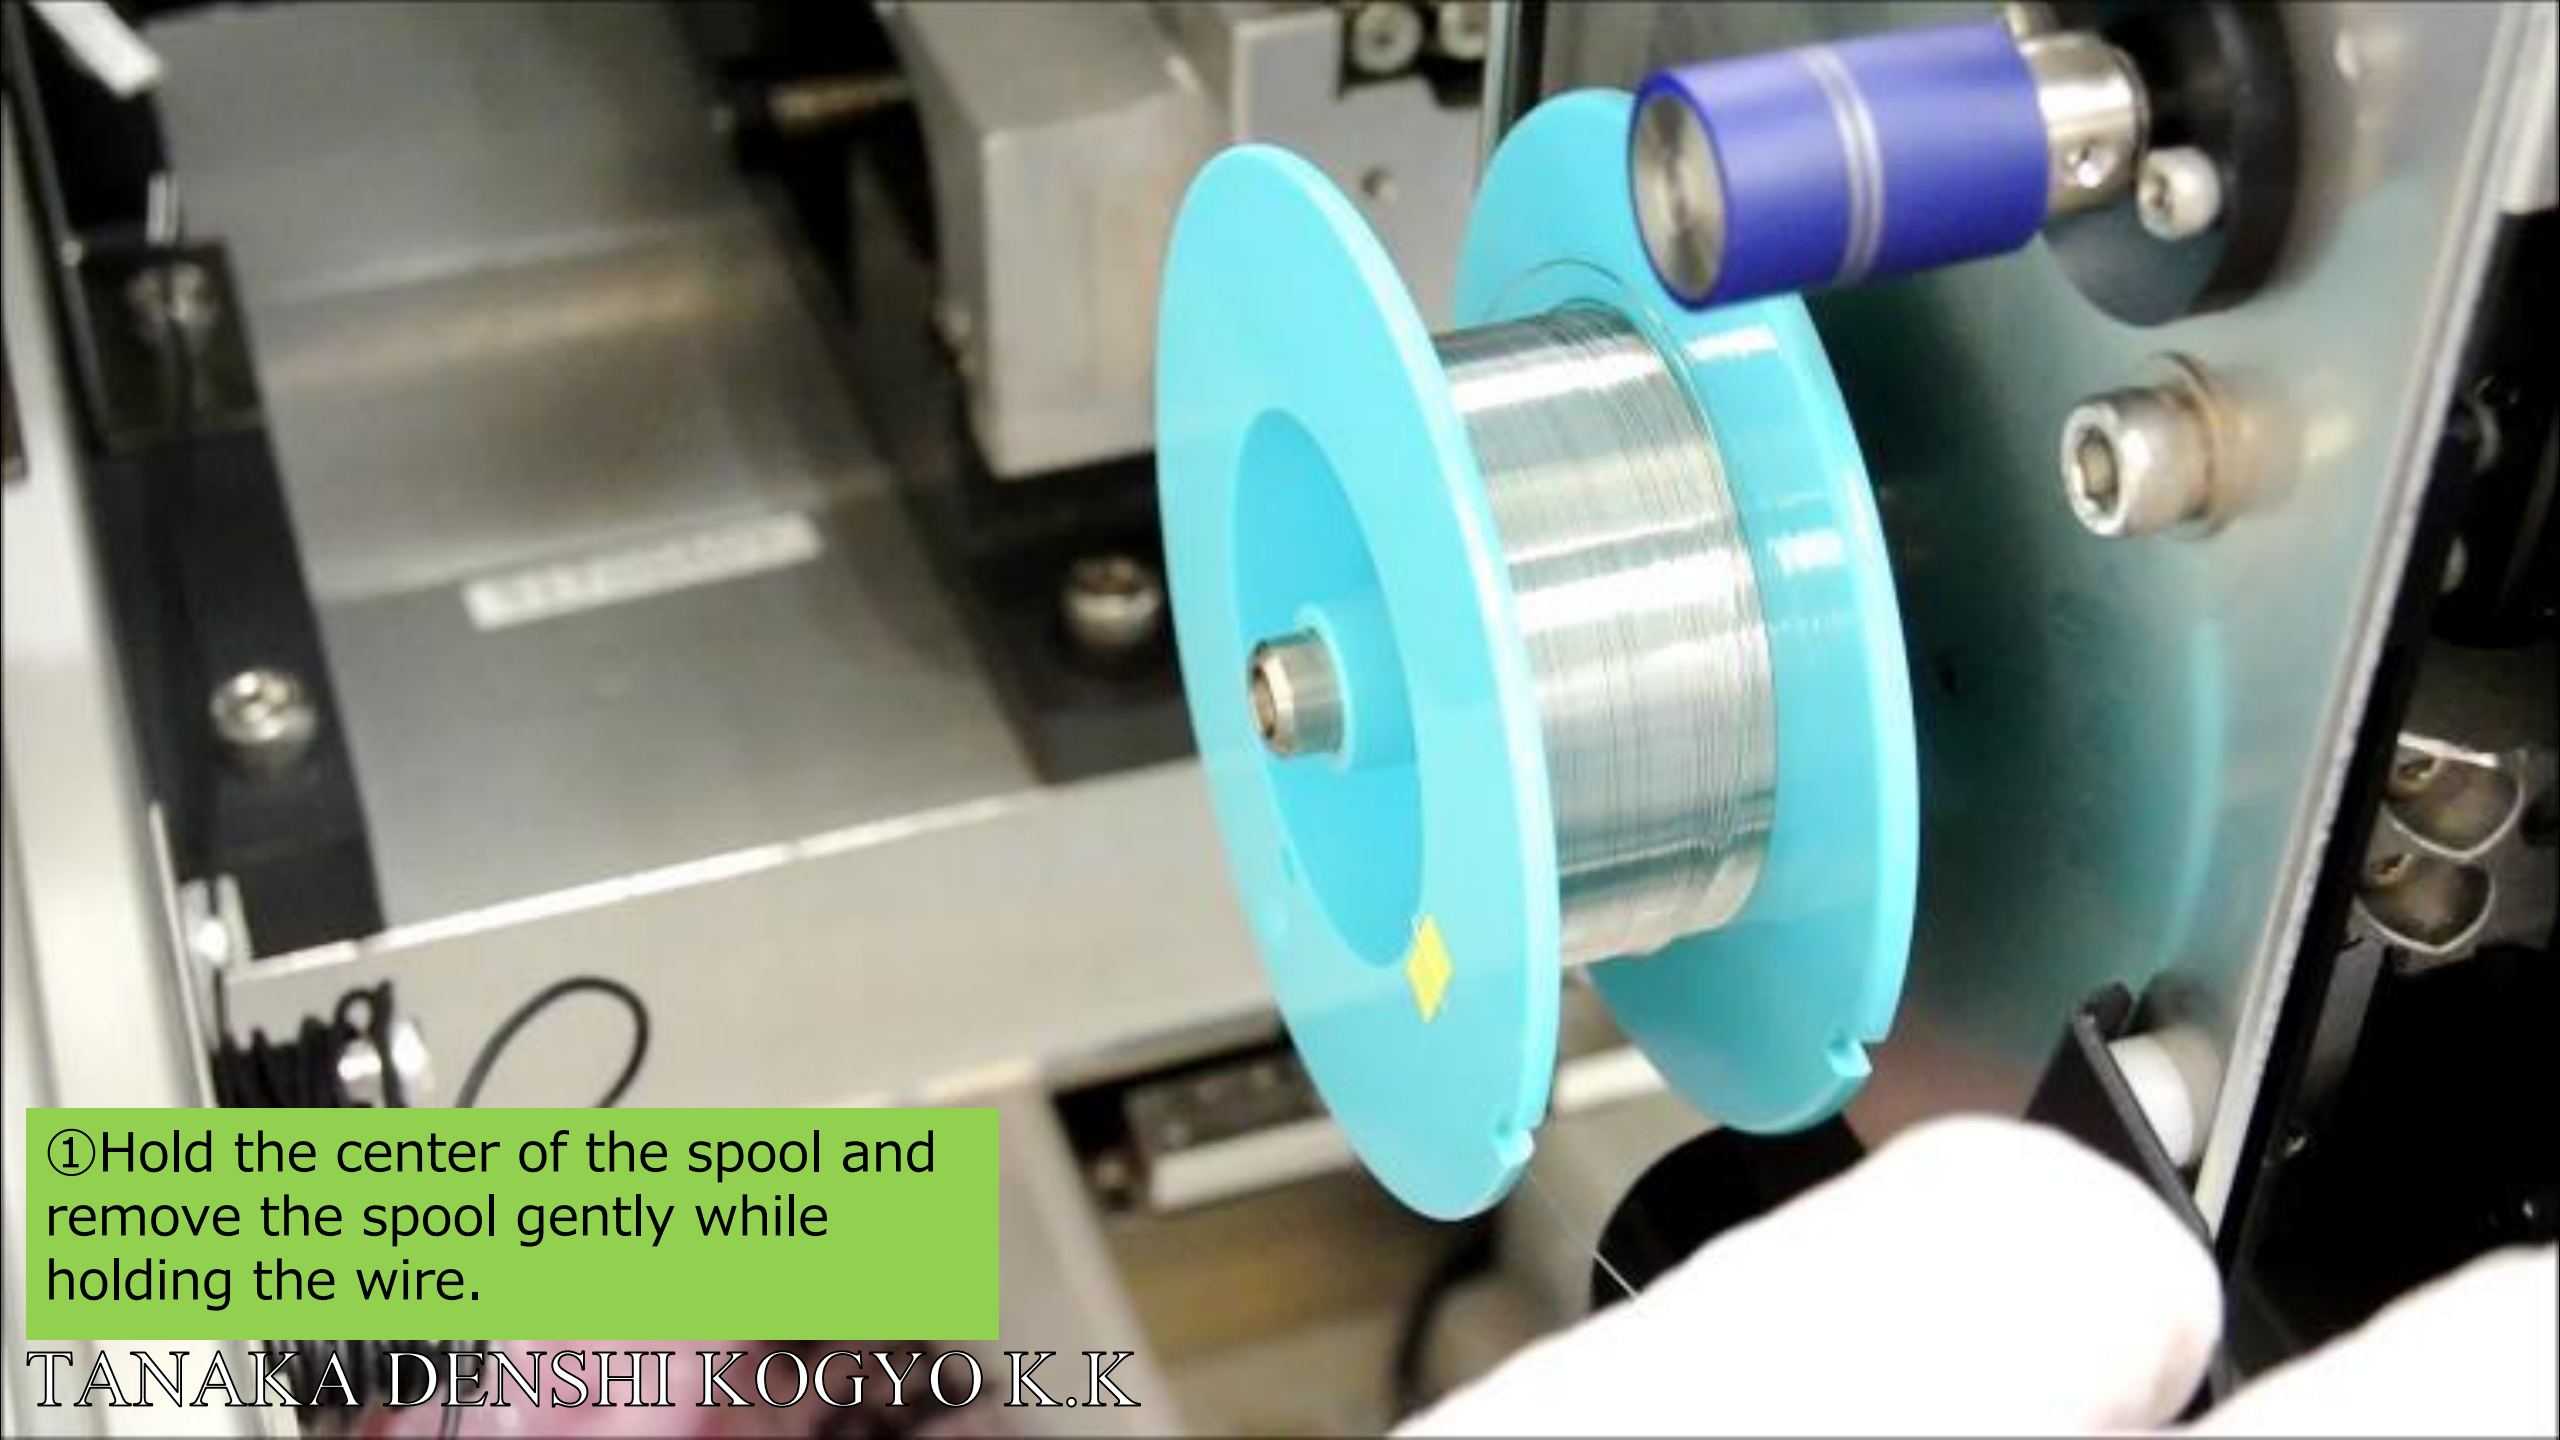


① Hold the center of the spool and remove the spool gently while holding the wire.

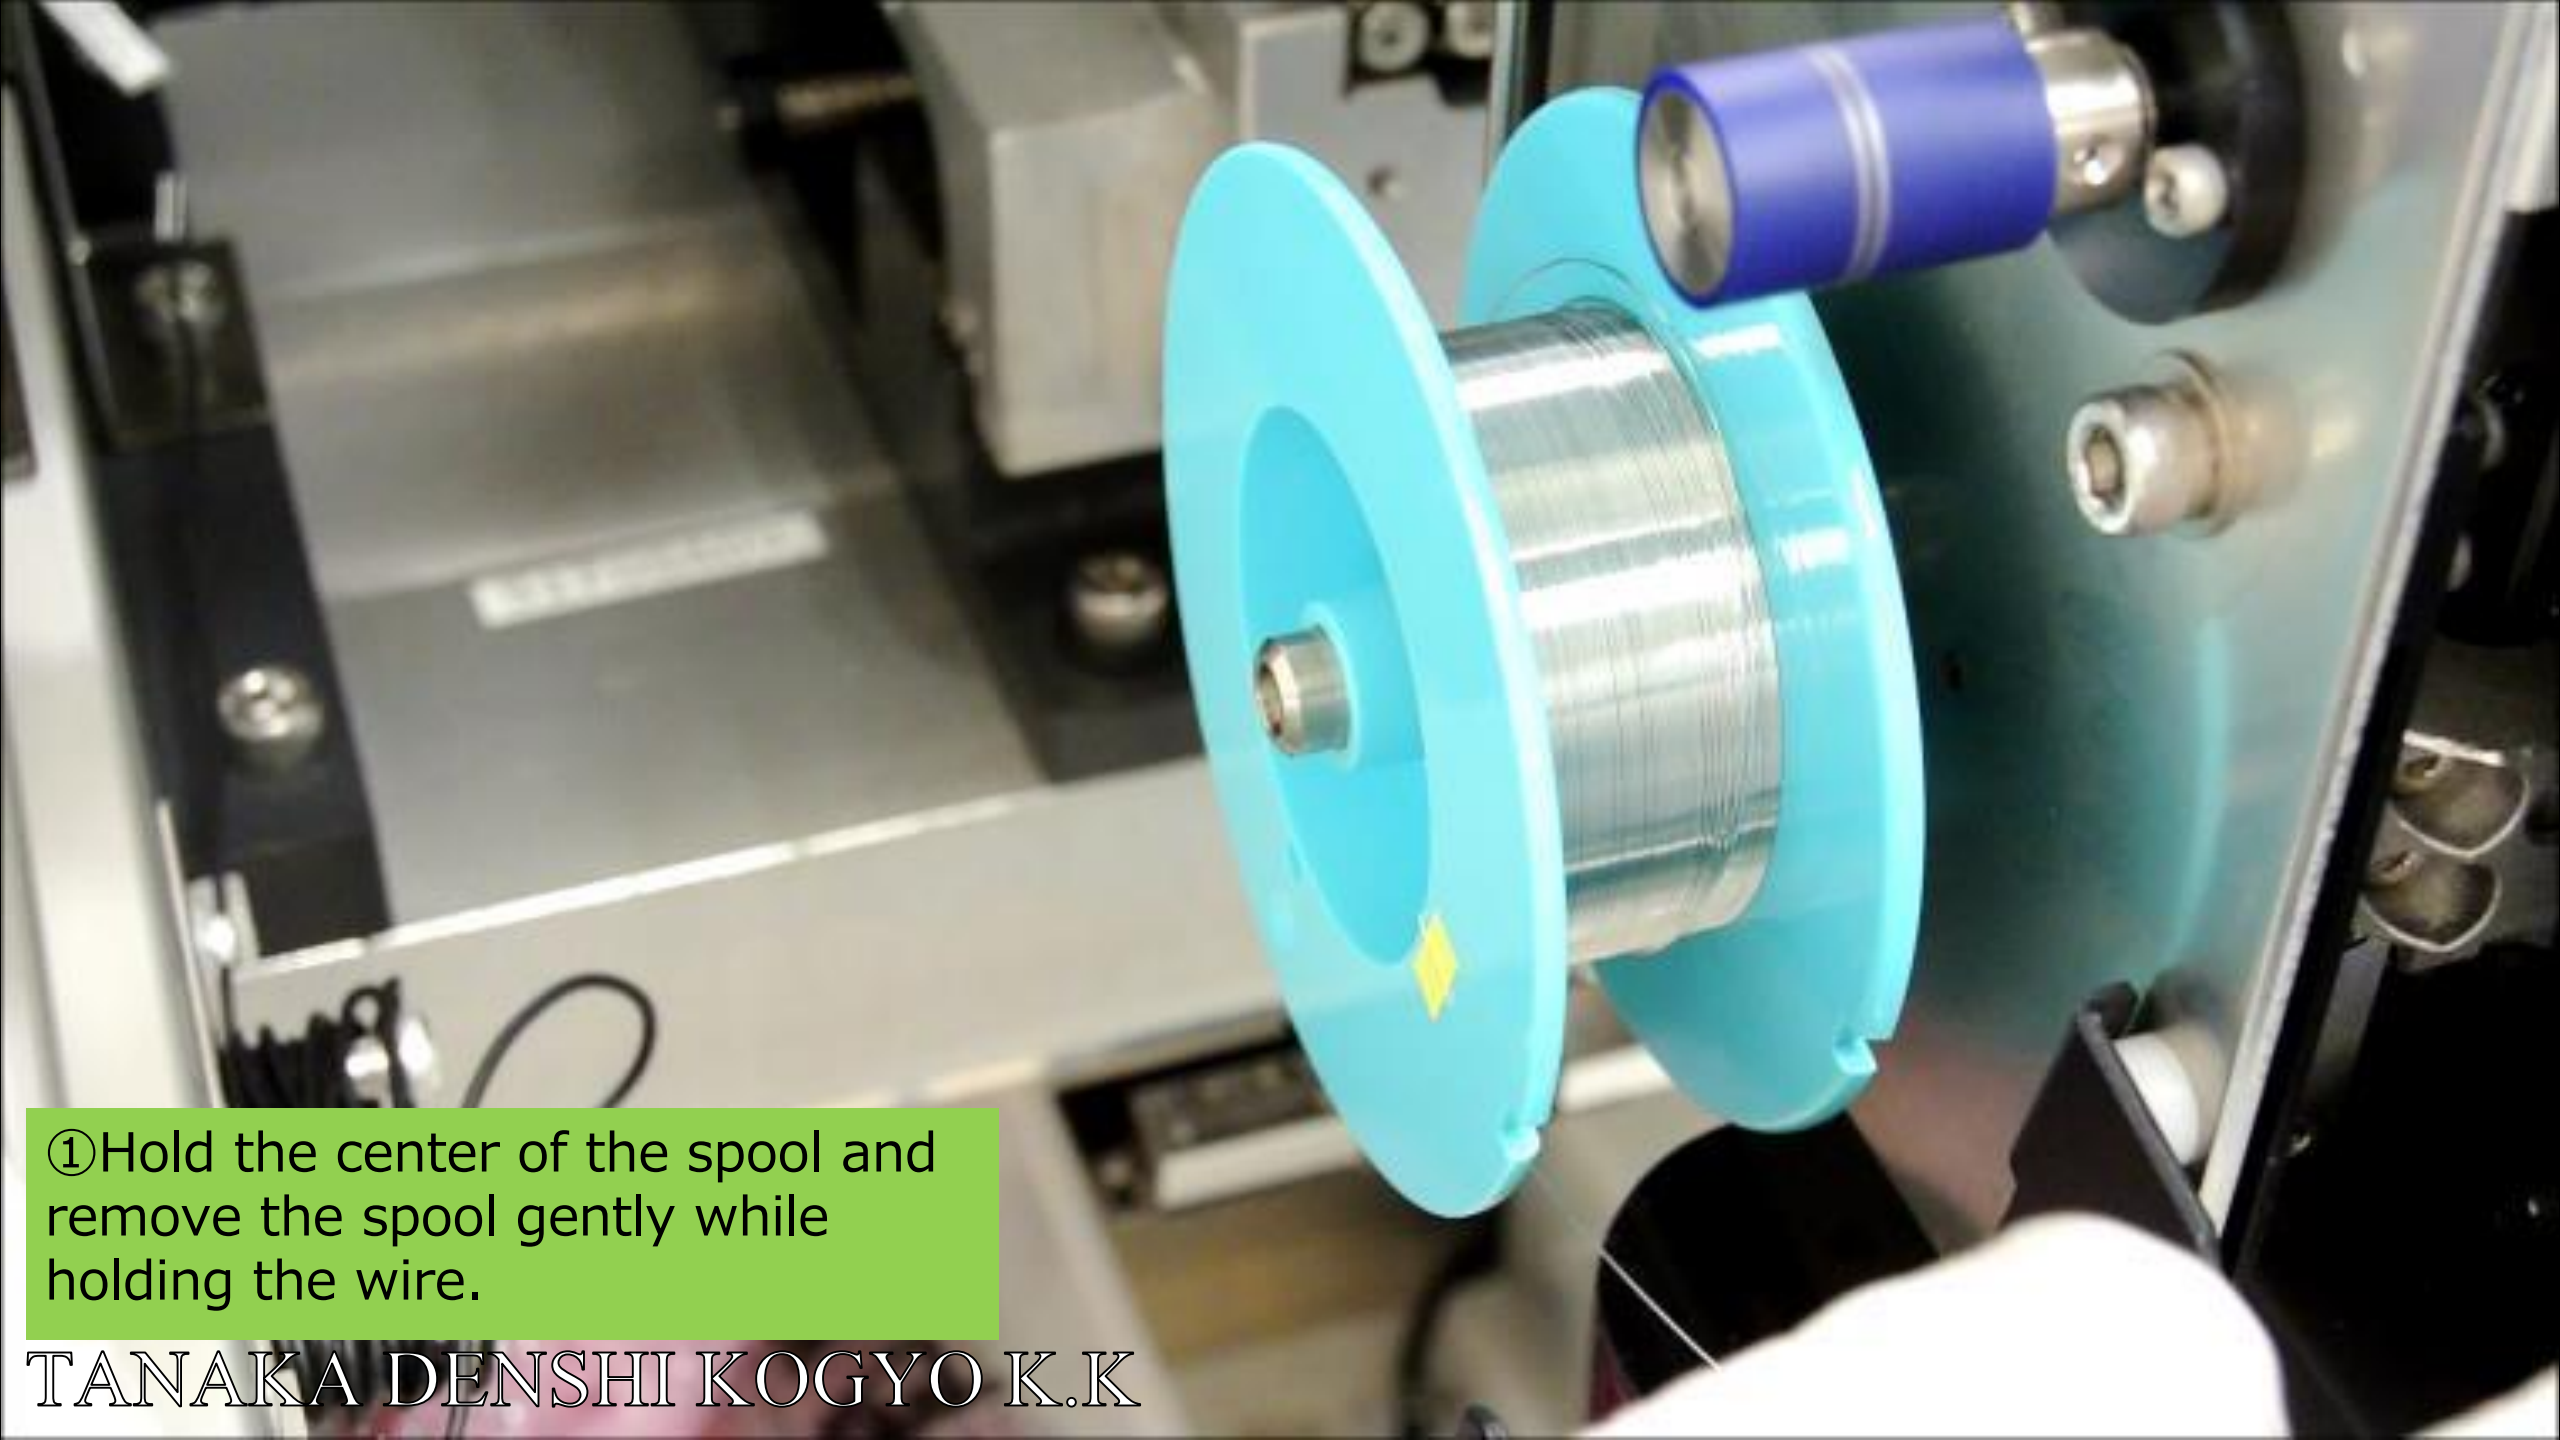

① Hold the center of the spool and remove the spool gently while holding the wire.

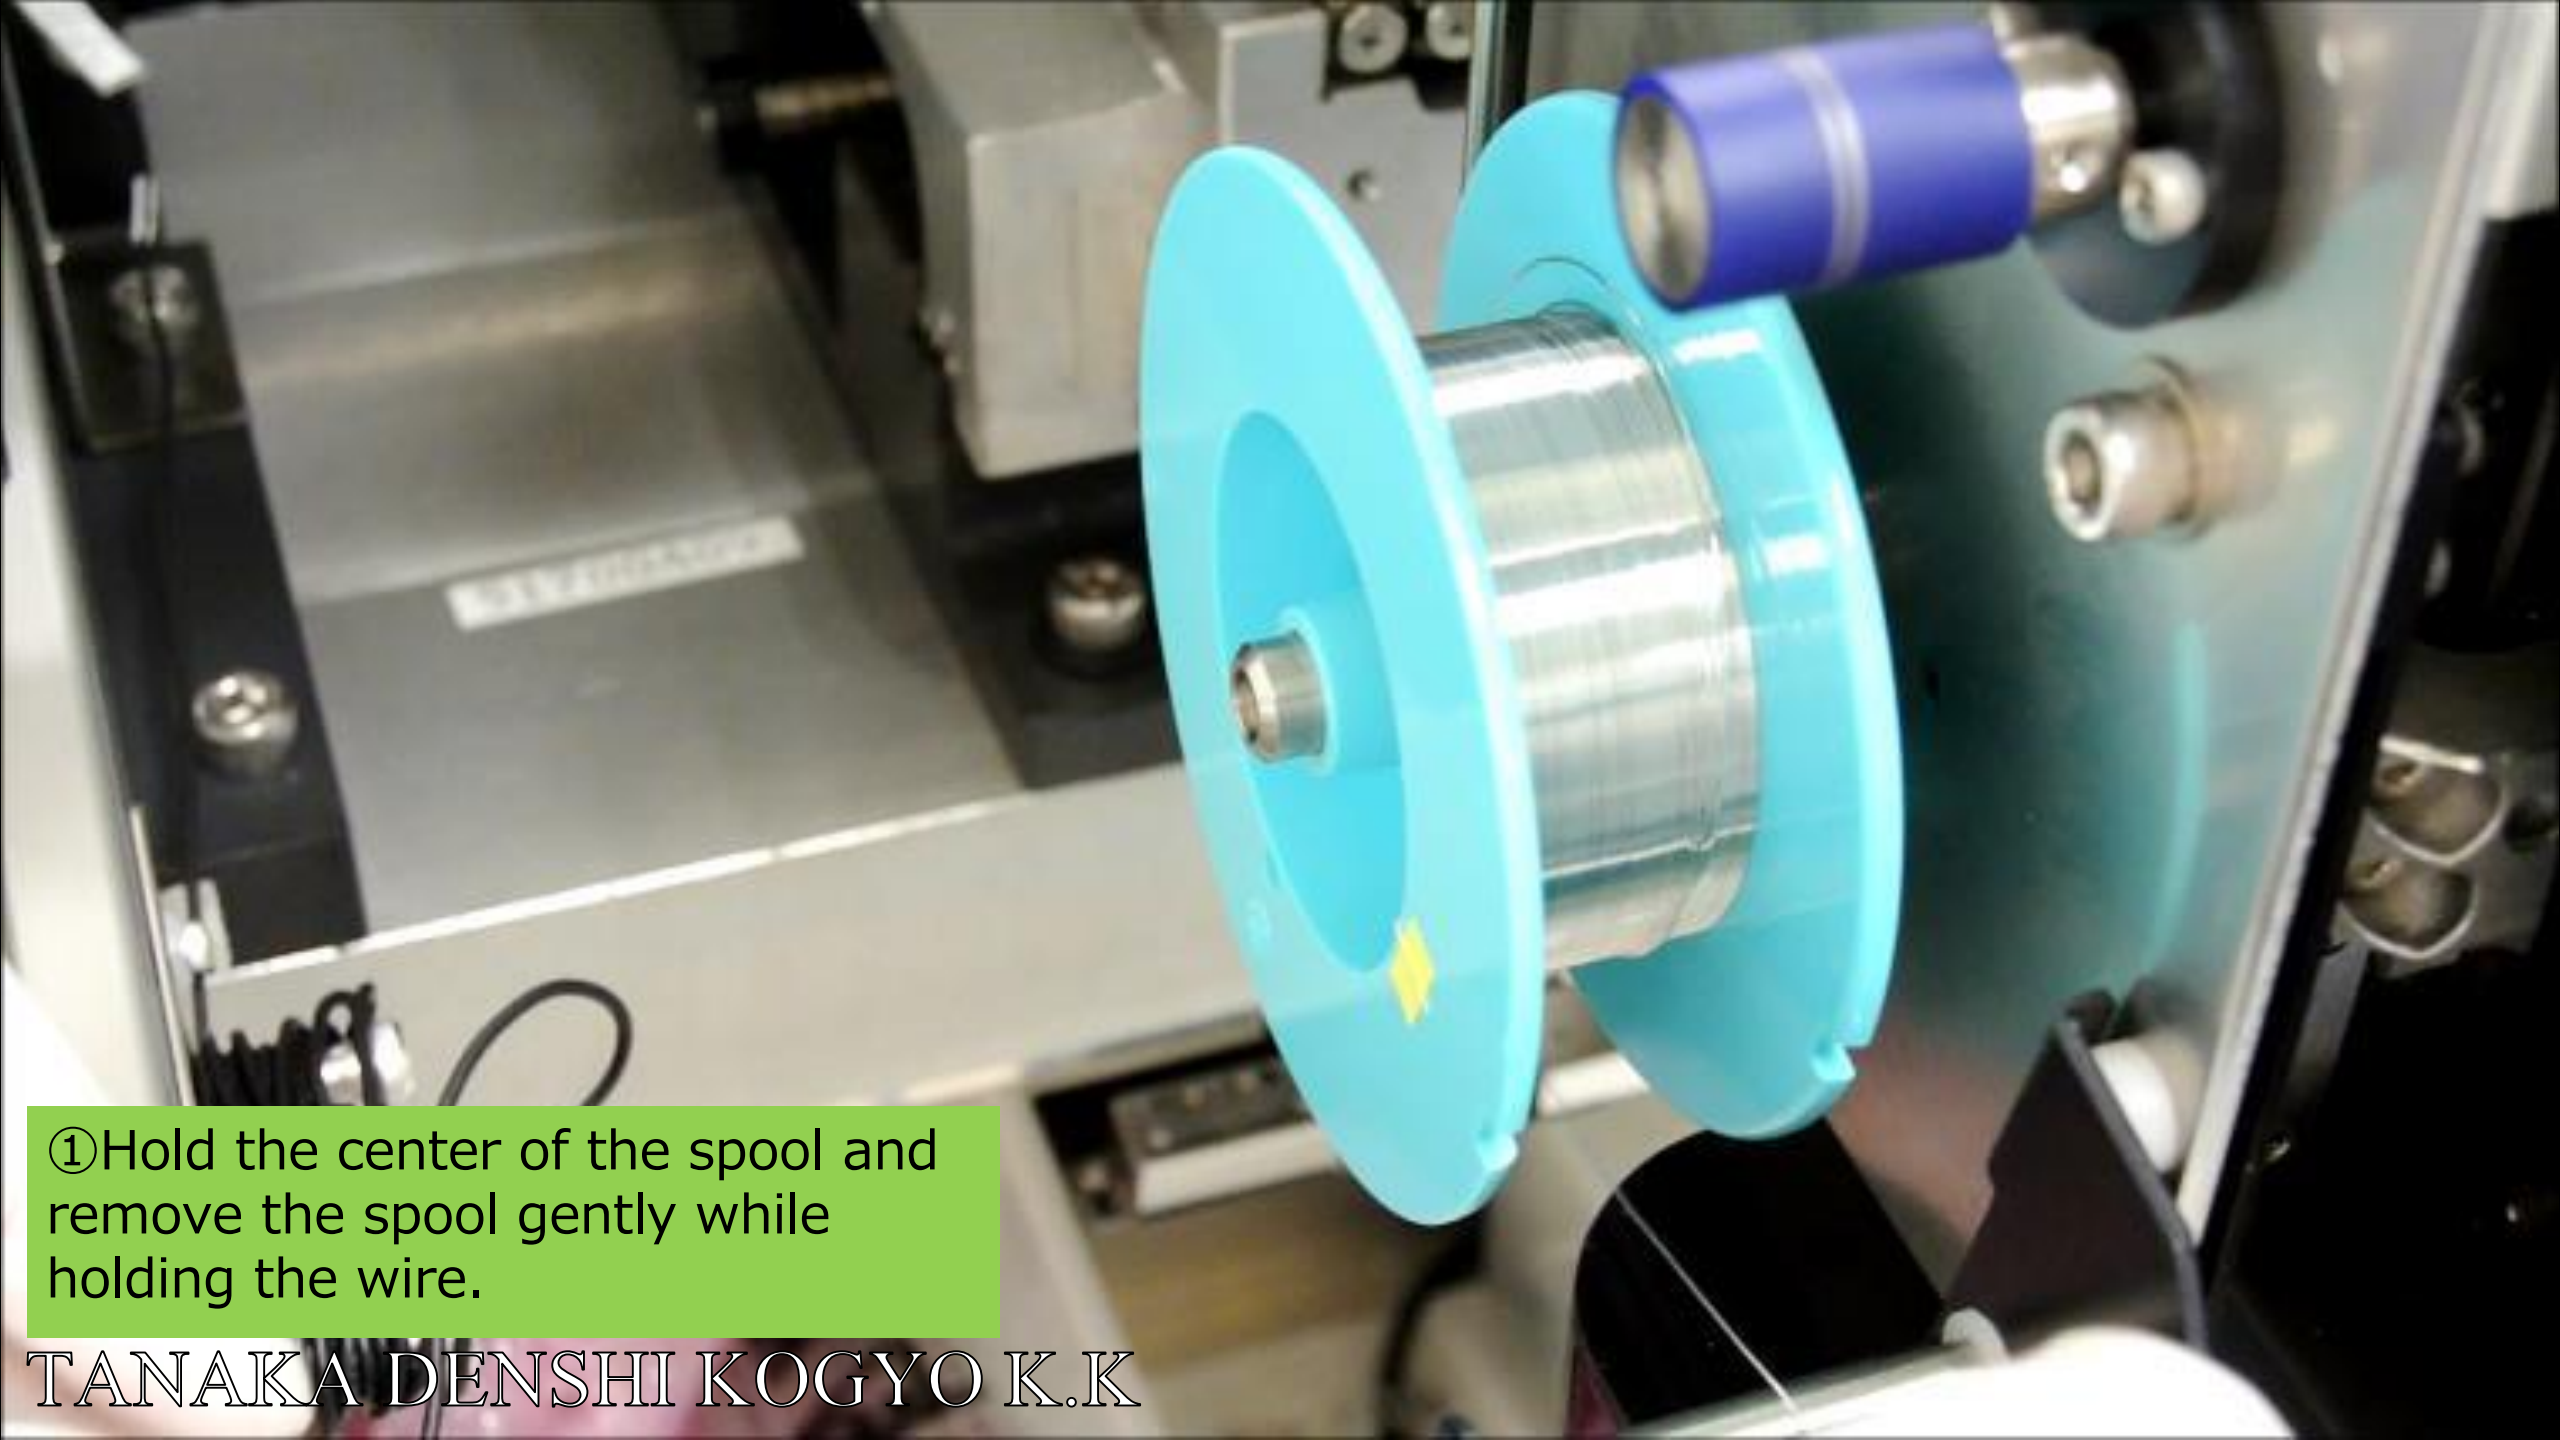

① Hold the center of the spool and remove the spool gently while holding the wire.

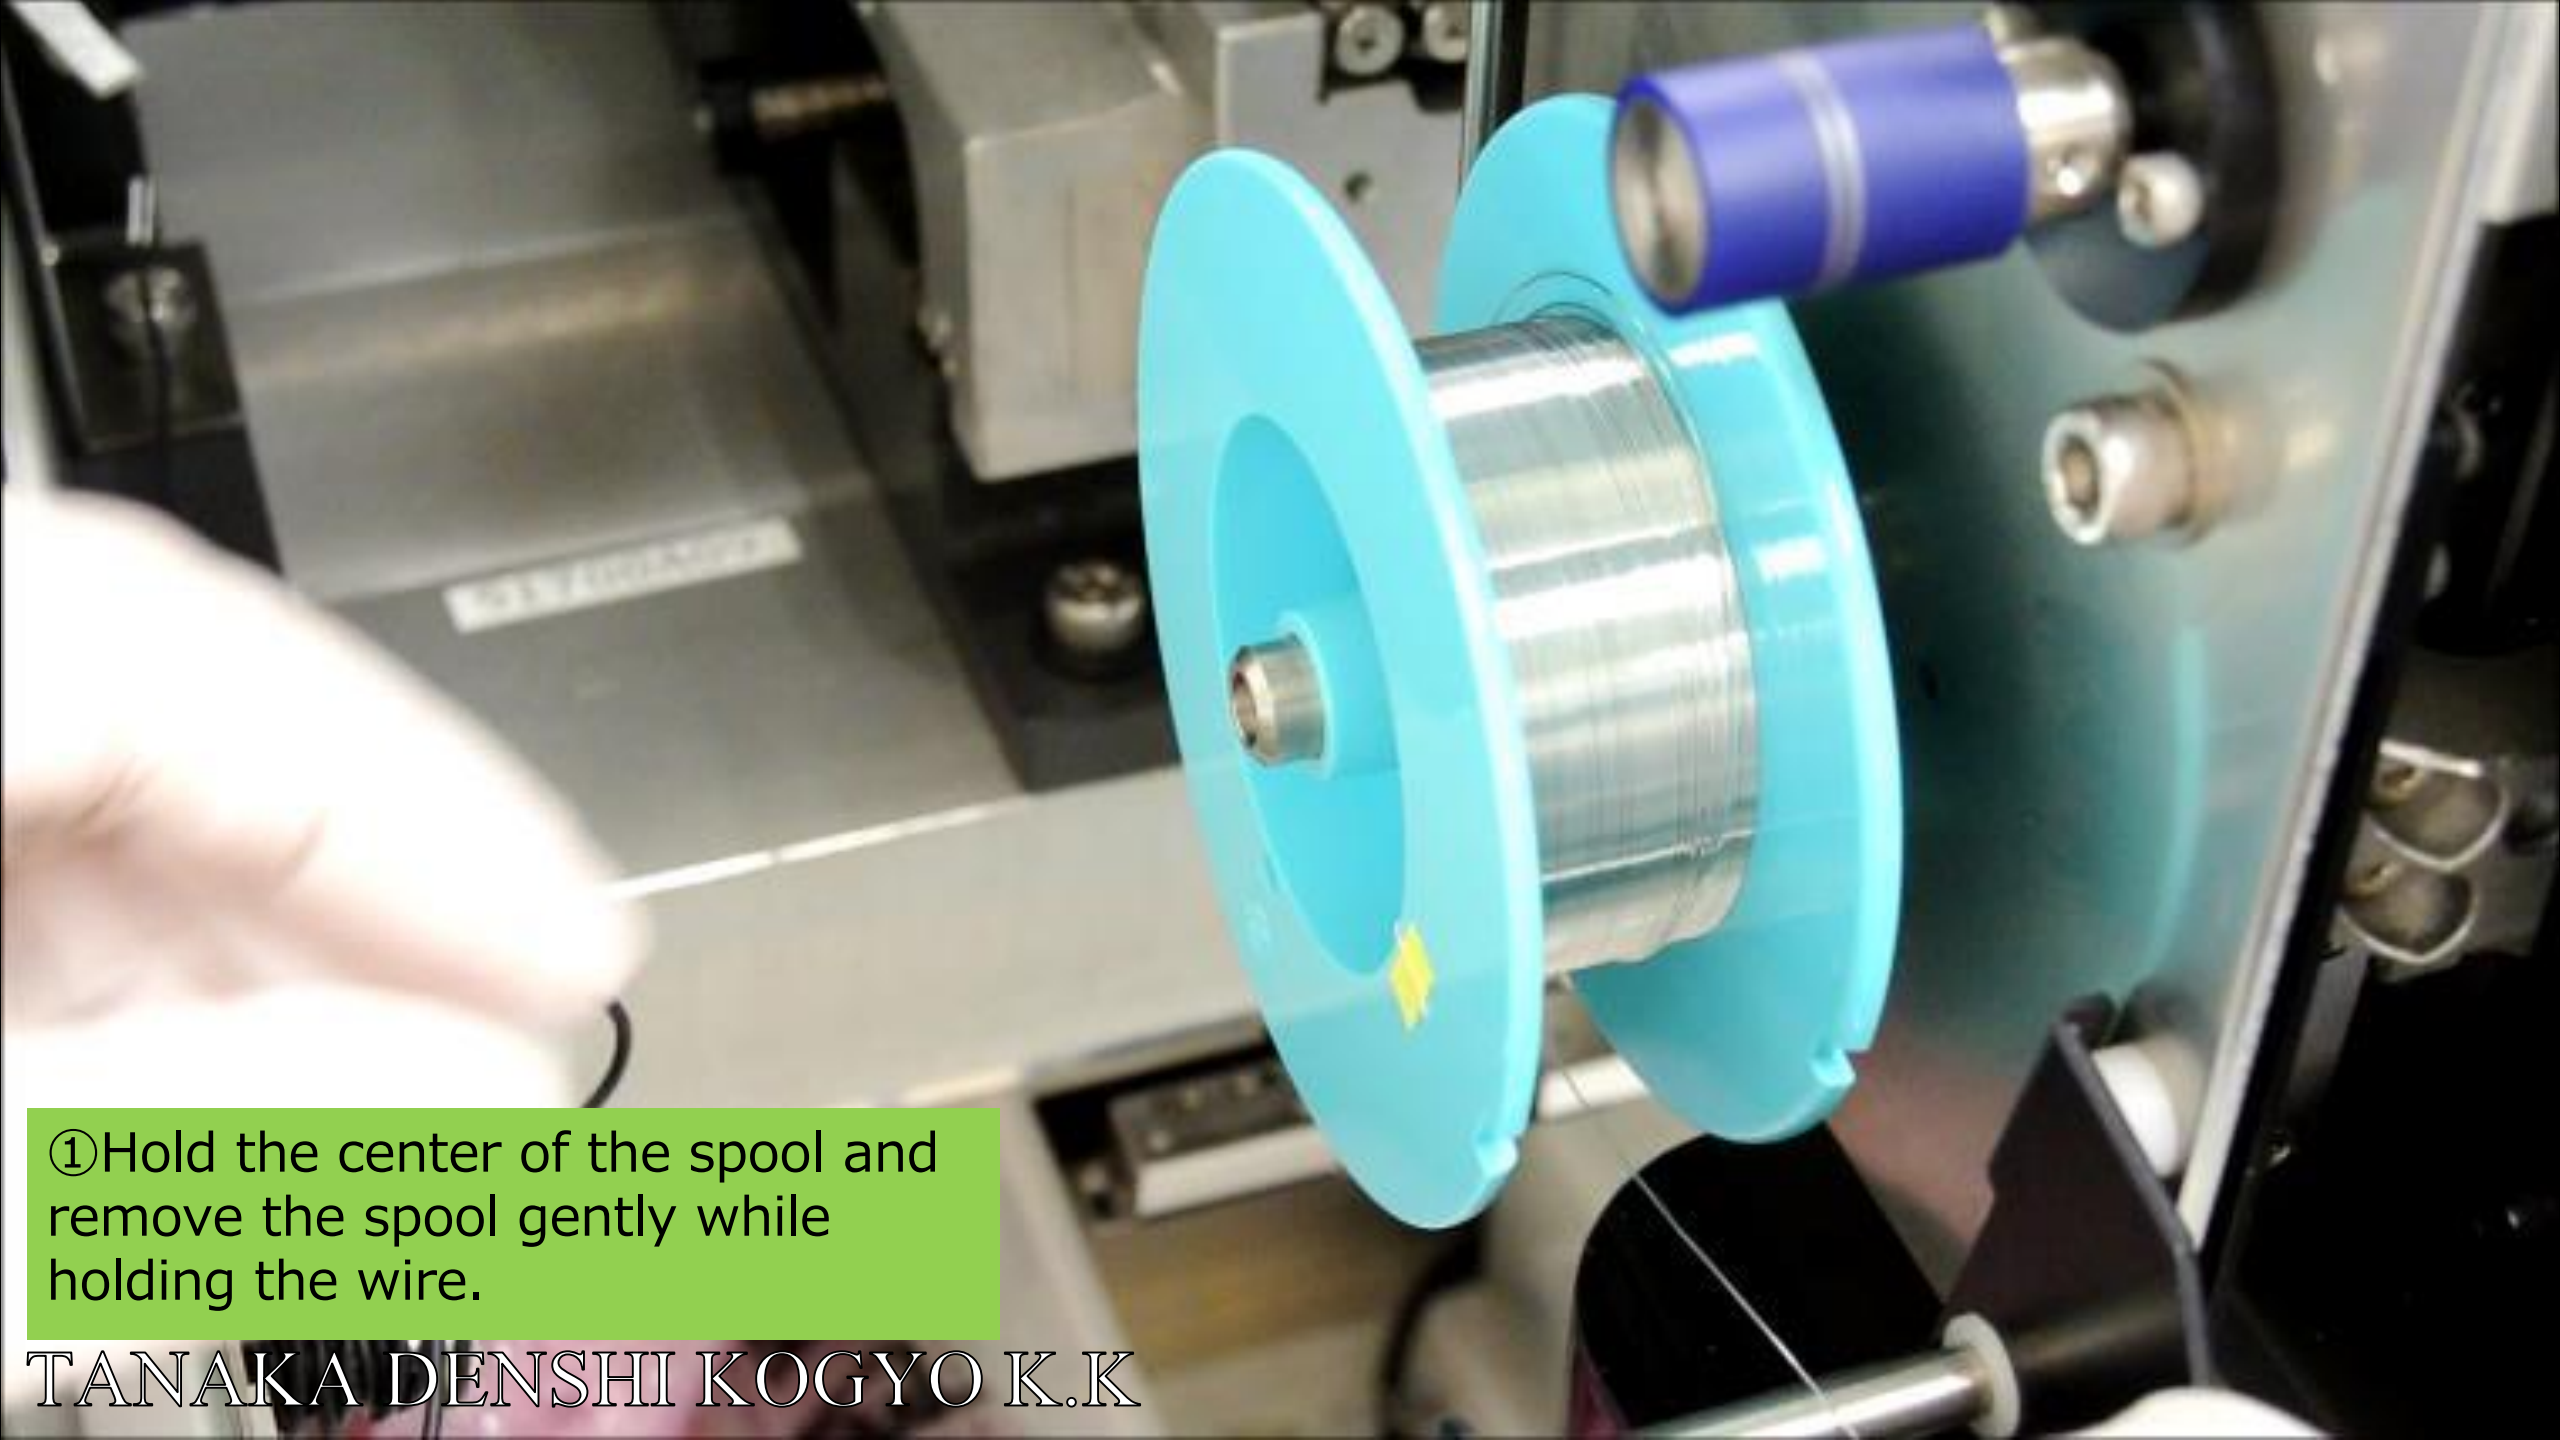

① Hold the center of the spool and remove the spool gently while holding the wire.



① Hold the center of the spool and remove the spool gently while holding the wire.





① Hold the center of the spool and remove the spool gently while holding the wire.

TANAKA DENSHI KOGYO K.K



① Hold the center of the spool and remove the spool gently while holding the wire.



① Hold the center of the spool and remove the spool gently while holding the wire.



① Hold the center of the spool and remove the spool gently while holding the wire.



① Hold the center of the spool and remove the spool gently while holding the wire.



① Hold the center of the spool and remove the spool gently while holding the wire.



① Hold the center of the spool and remove the spool gently while holding the wire.



① Hold the center of the spool and remove the spool gently while holding the wire.






① Hold the center of the spool and remove the spool gently while holding the wire.




① Hold the center of the spool and remove the spool gently while holding the wire.




① Hold the center of the spool and remove the spool gently while holding the wire.

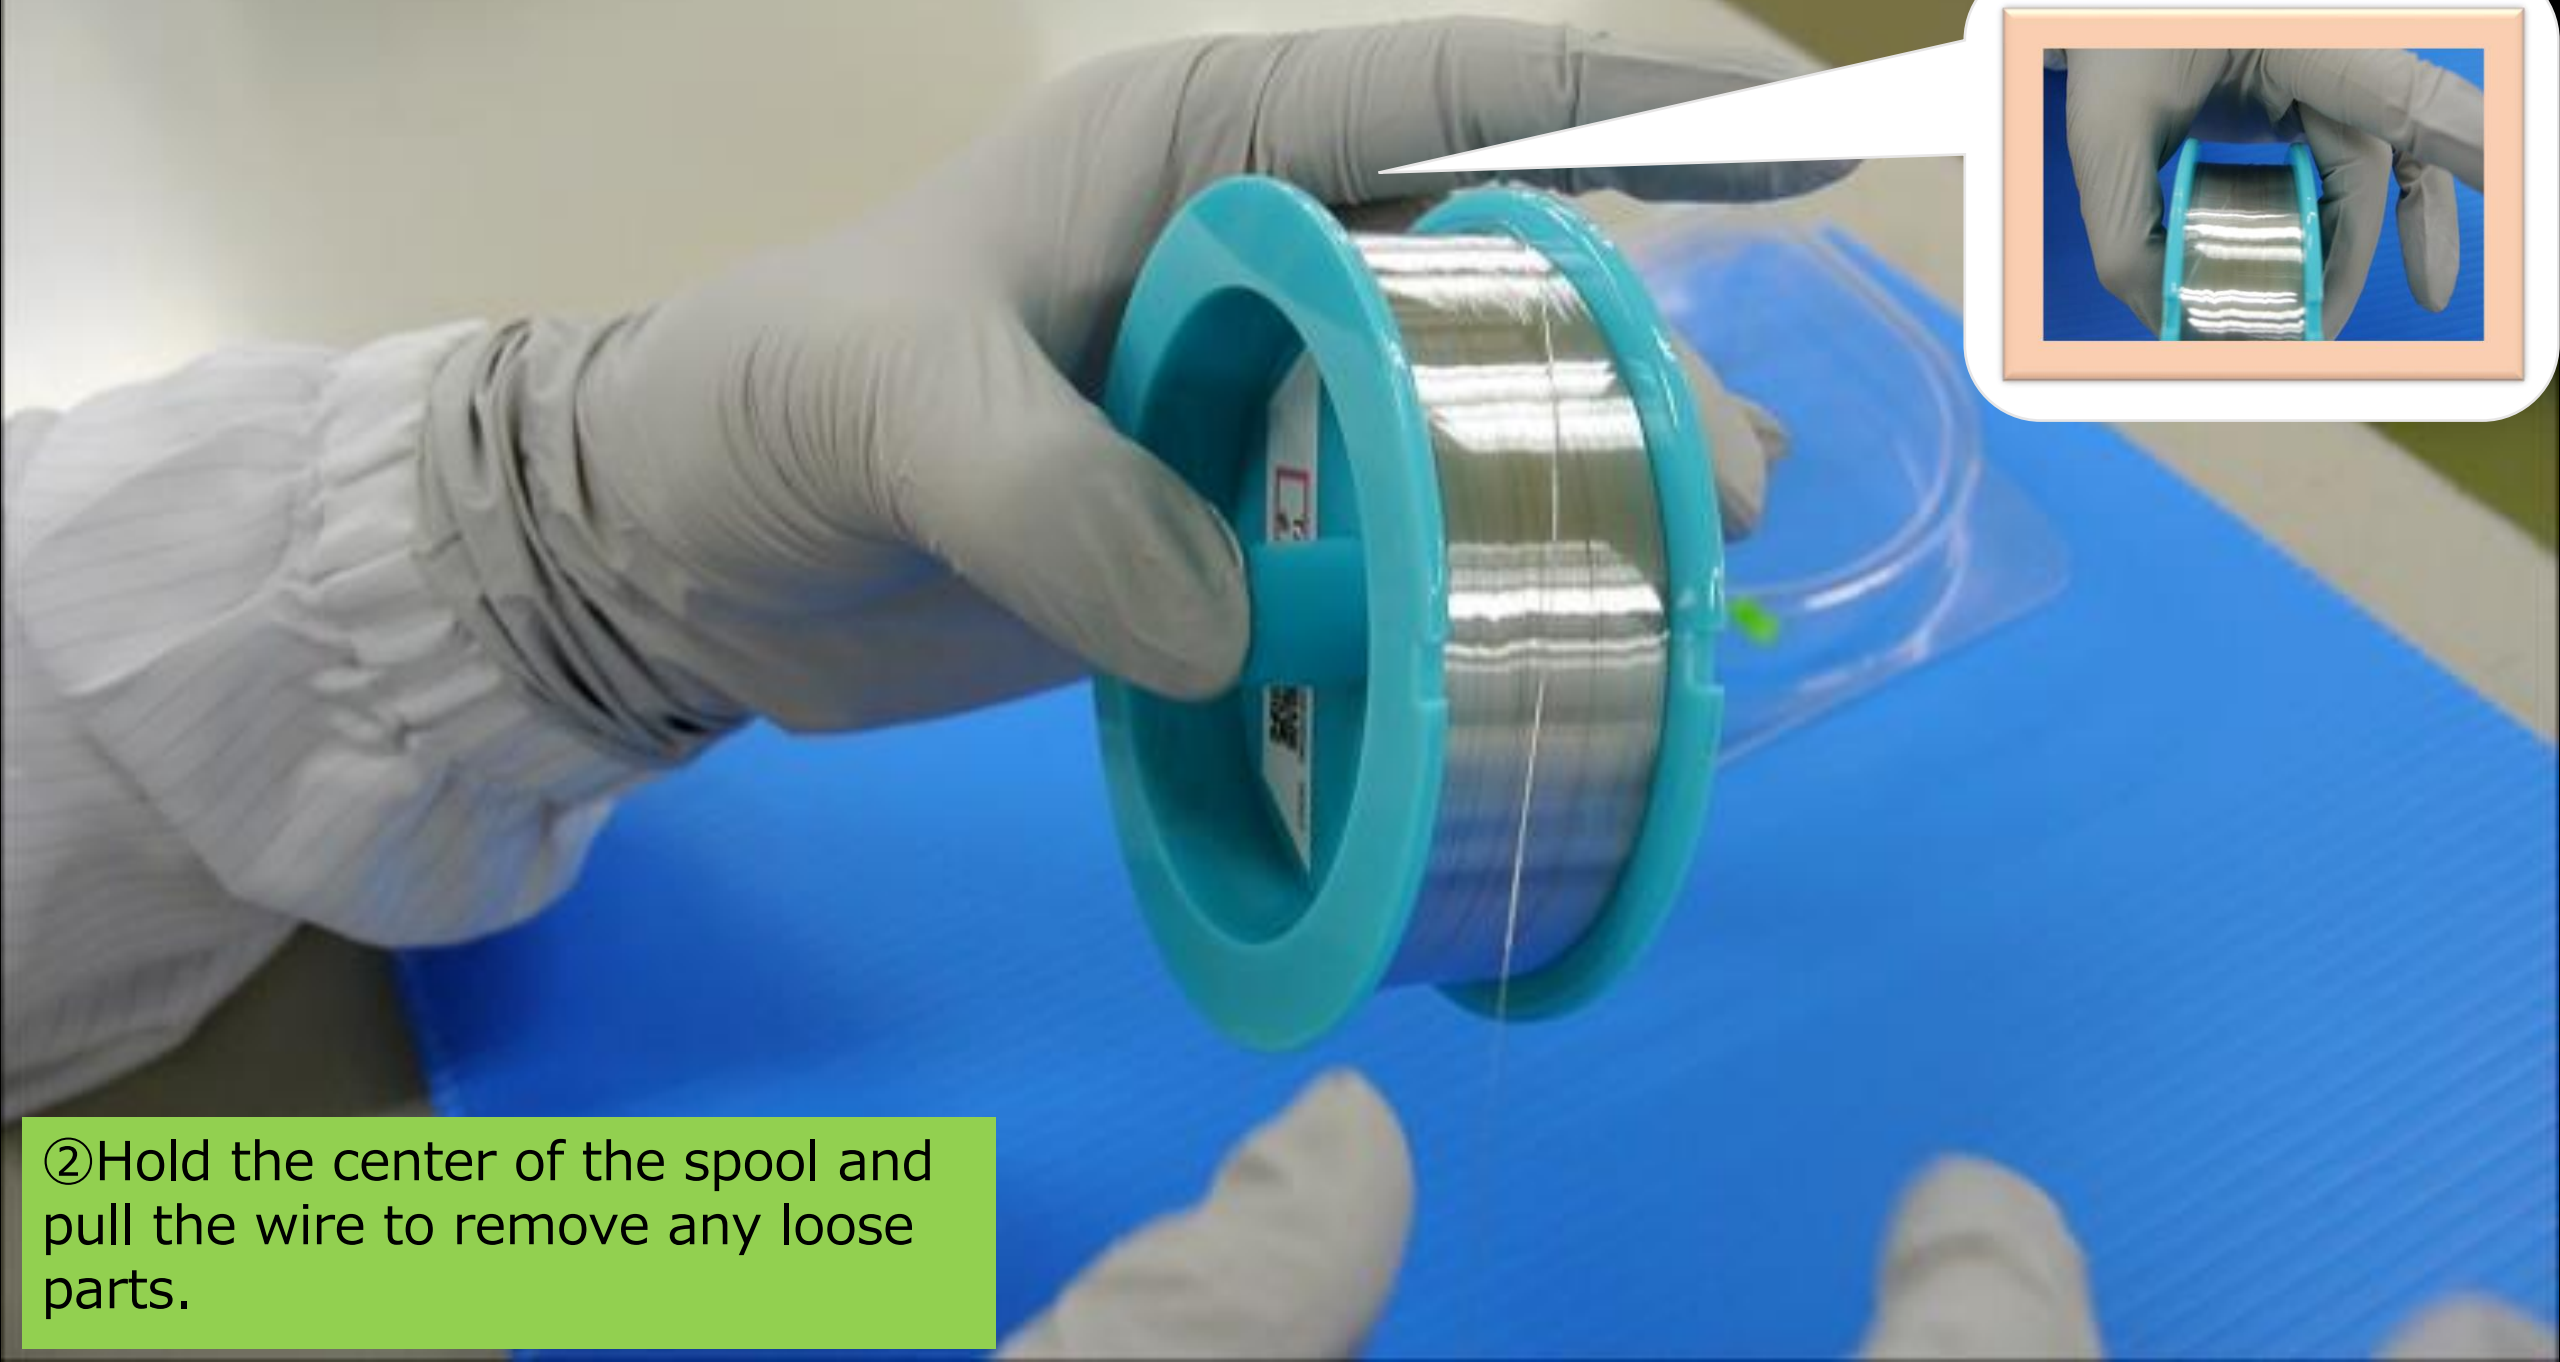


② Hold the center of the spool and pull the wire to remove any loose parts.

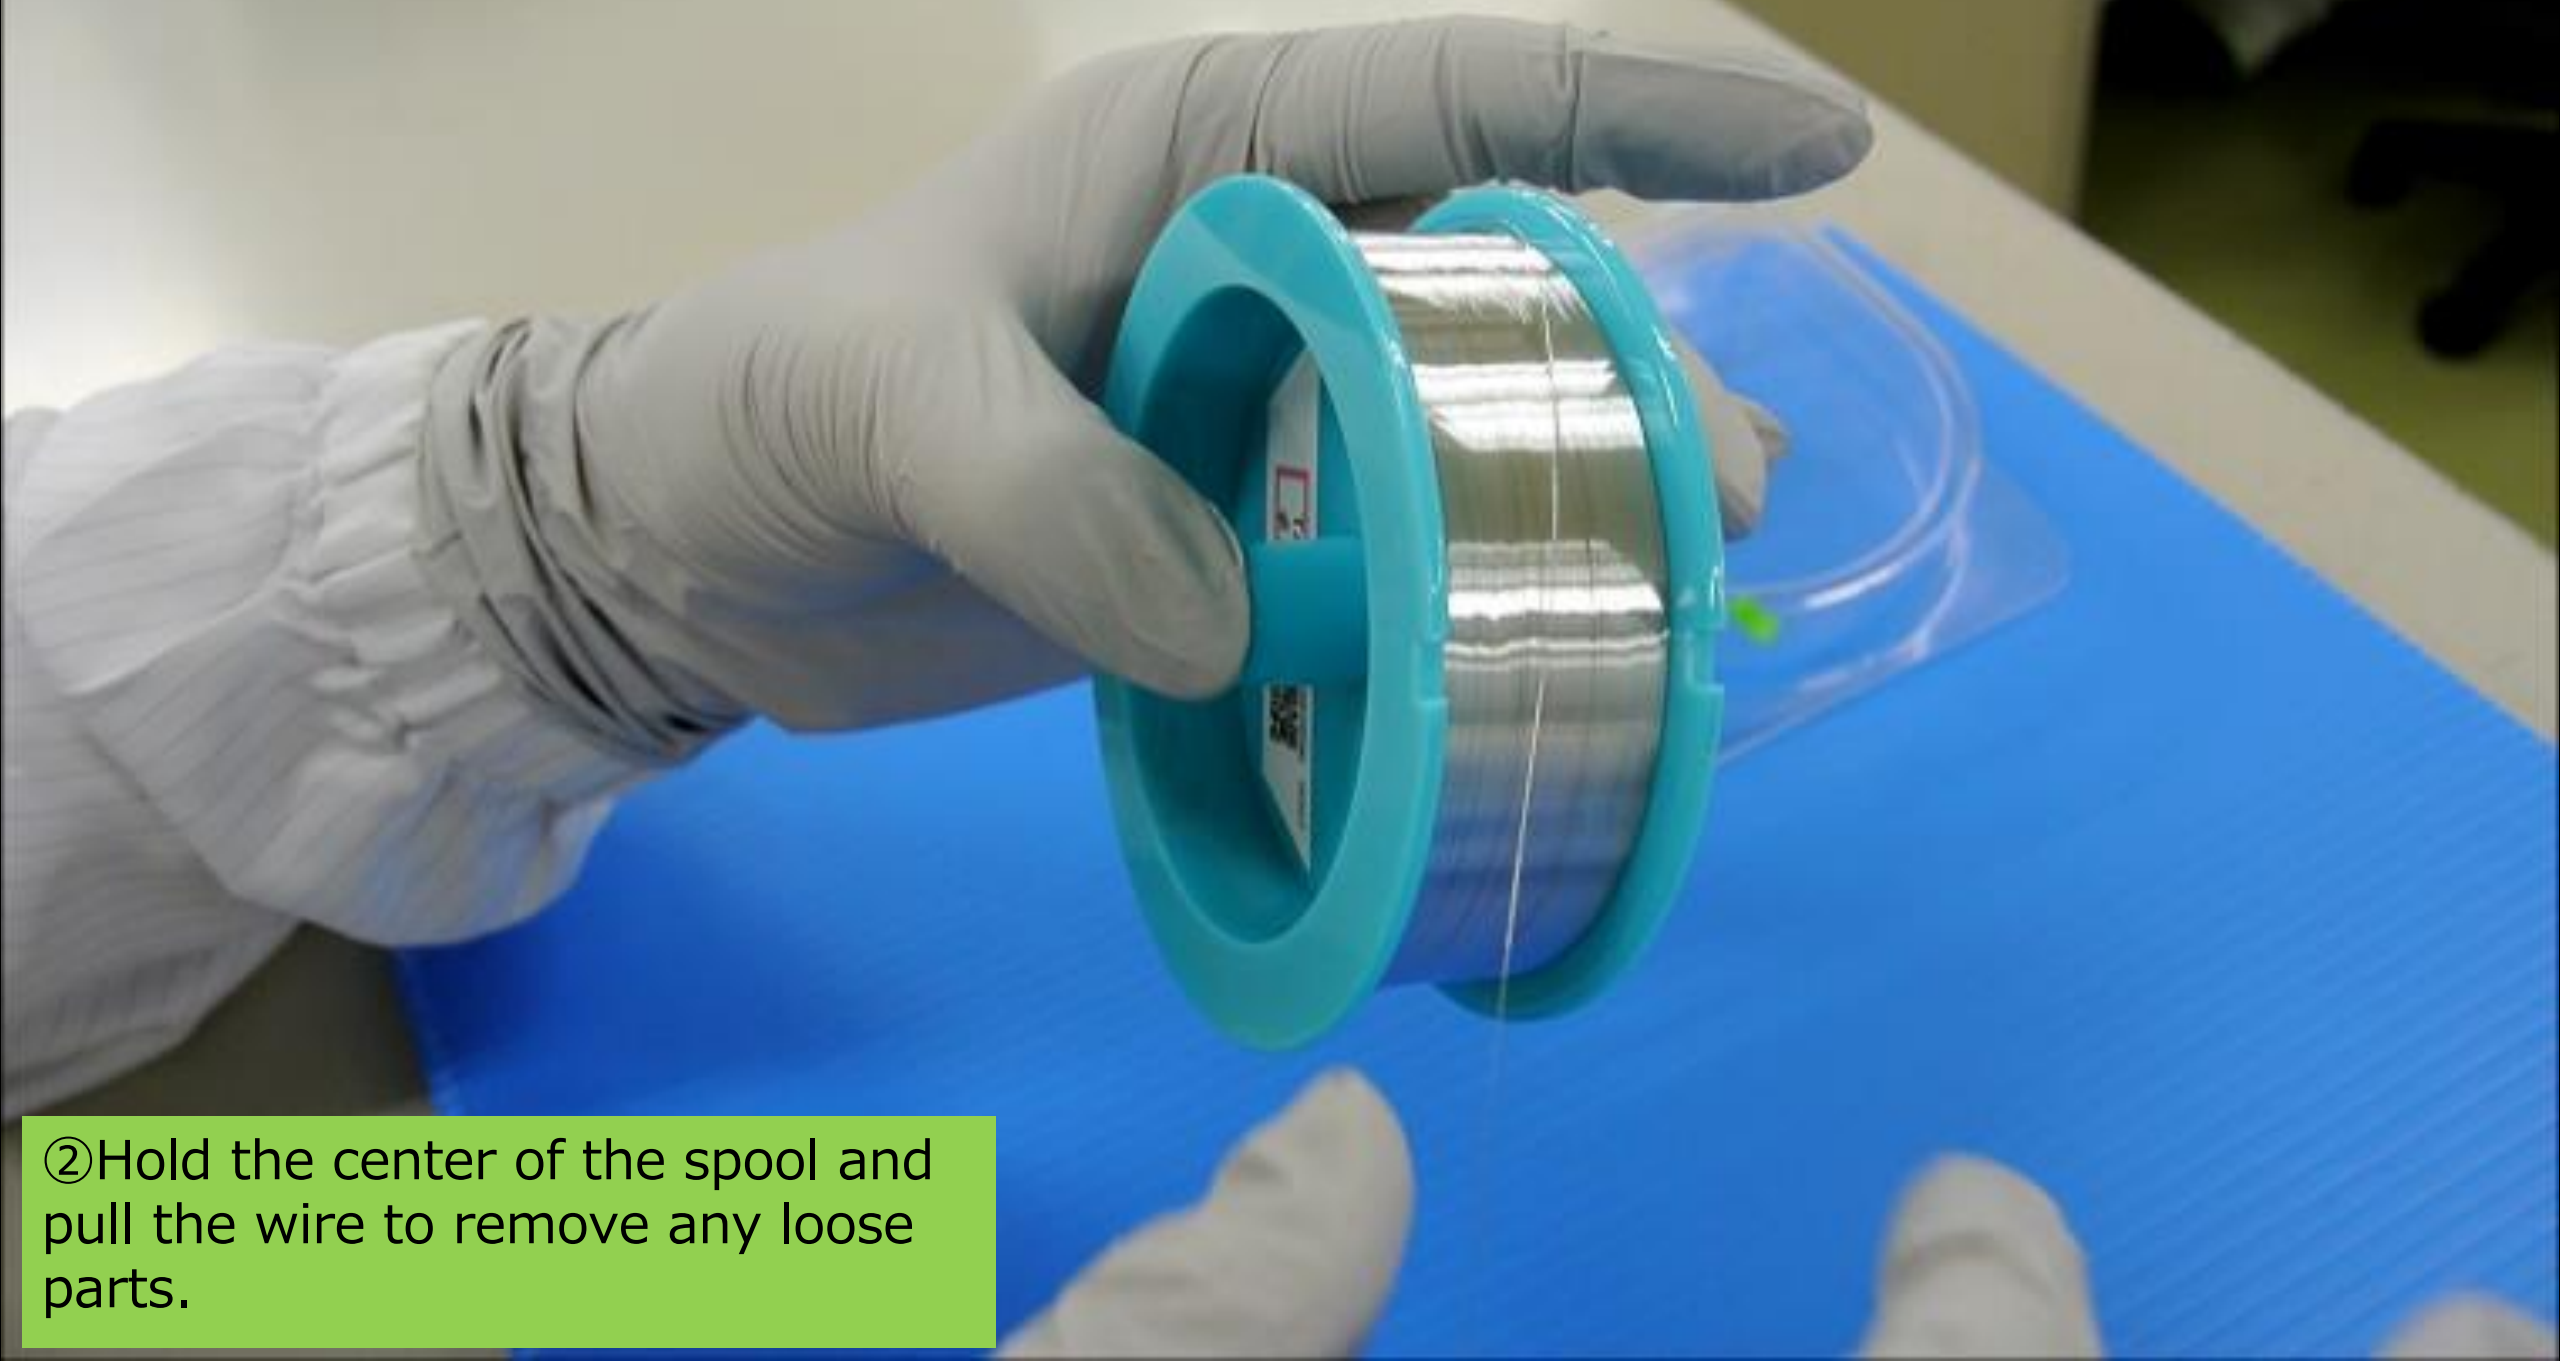

② Hold the center of the spool and pull the wire to remove any loose parts.

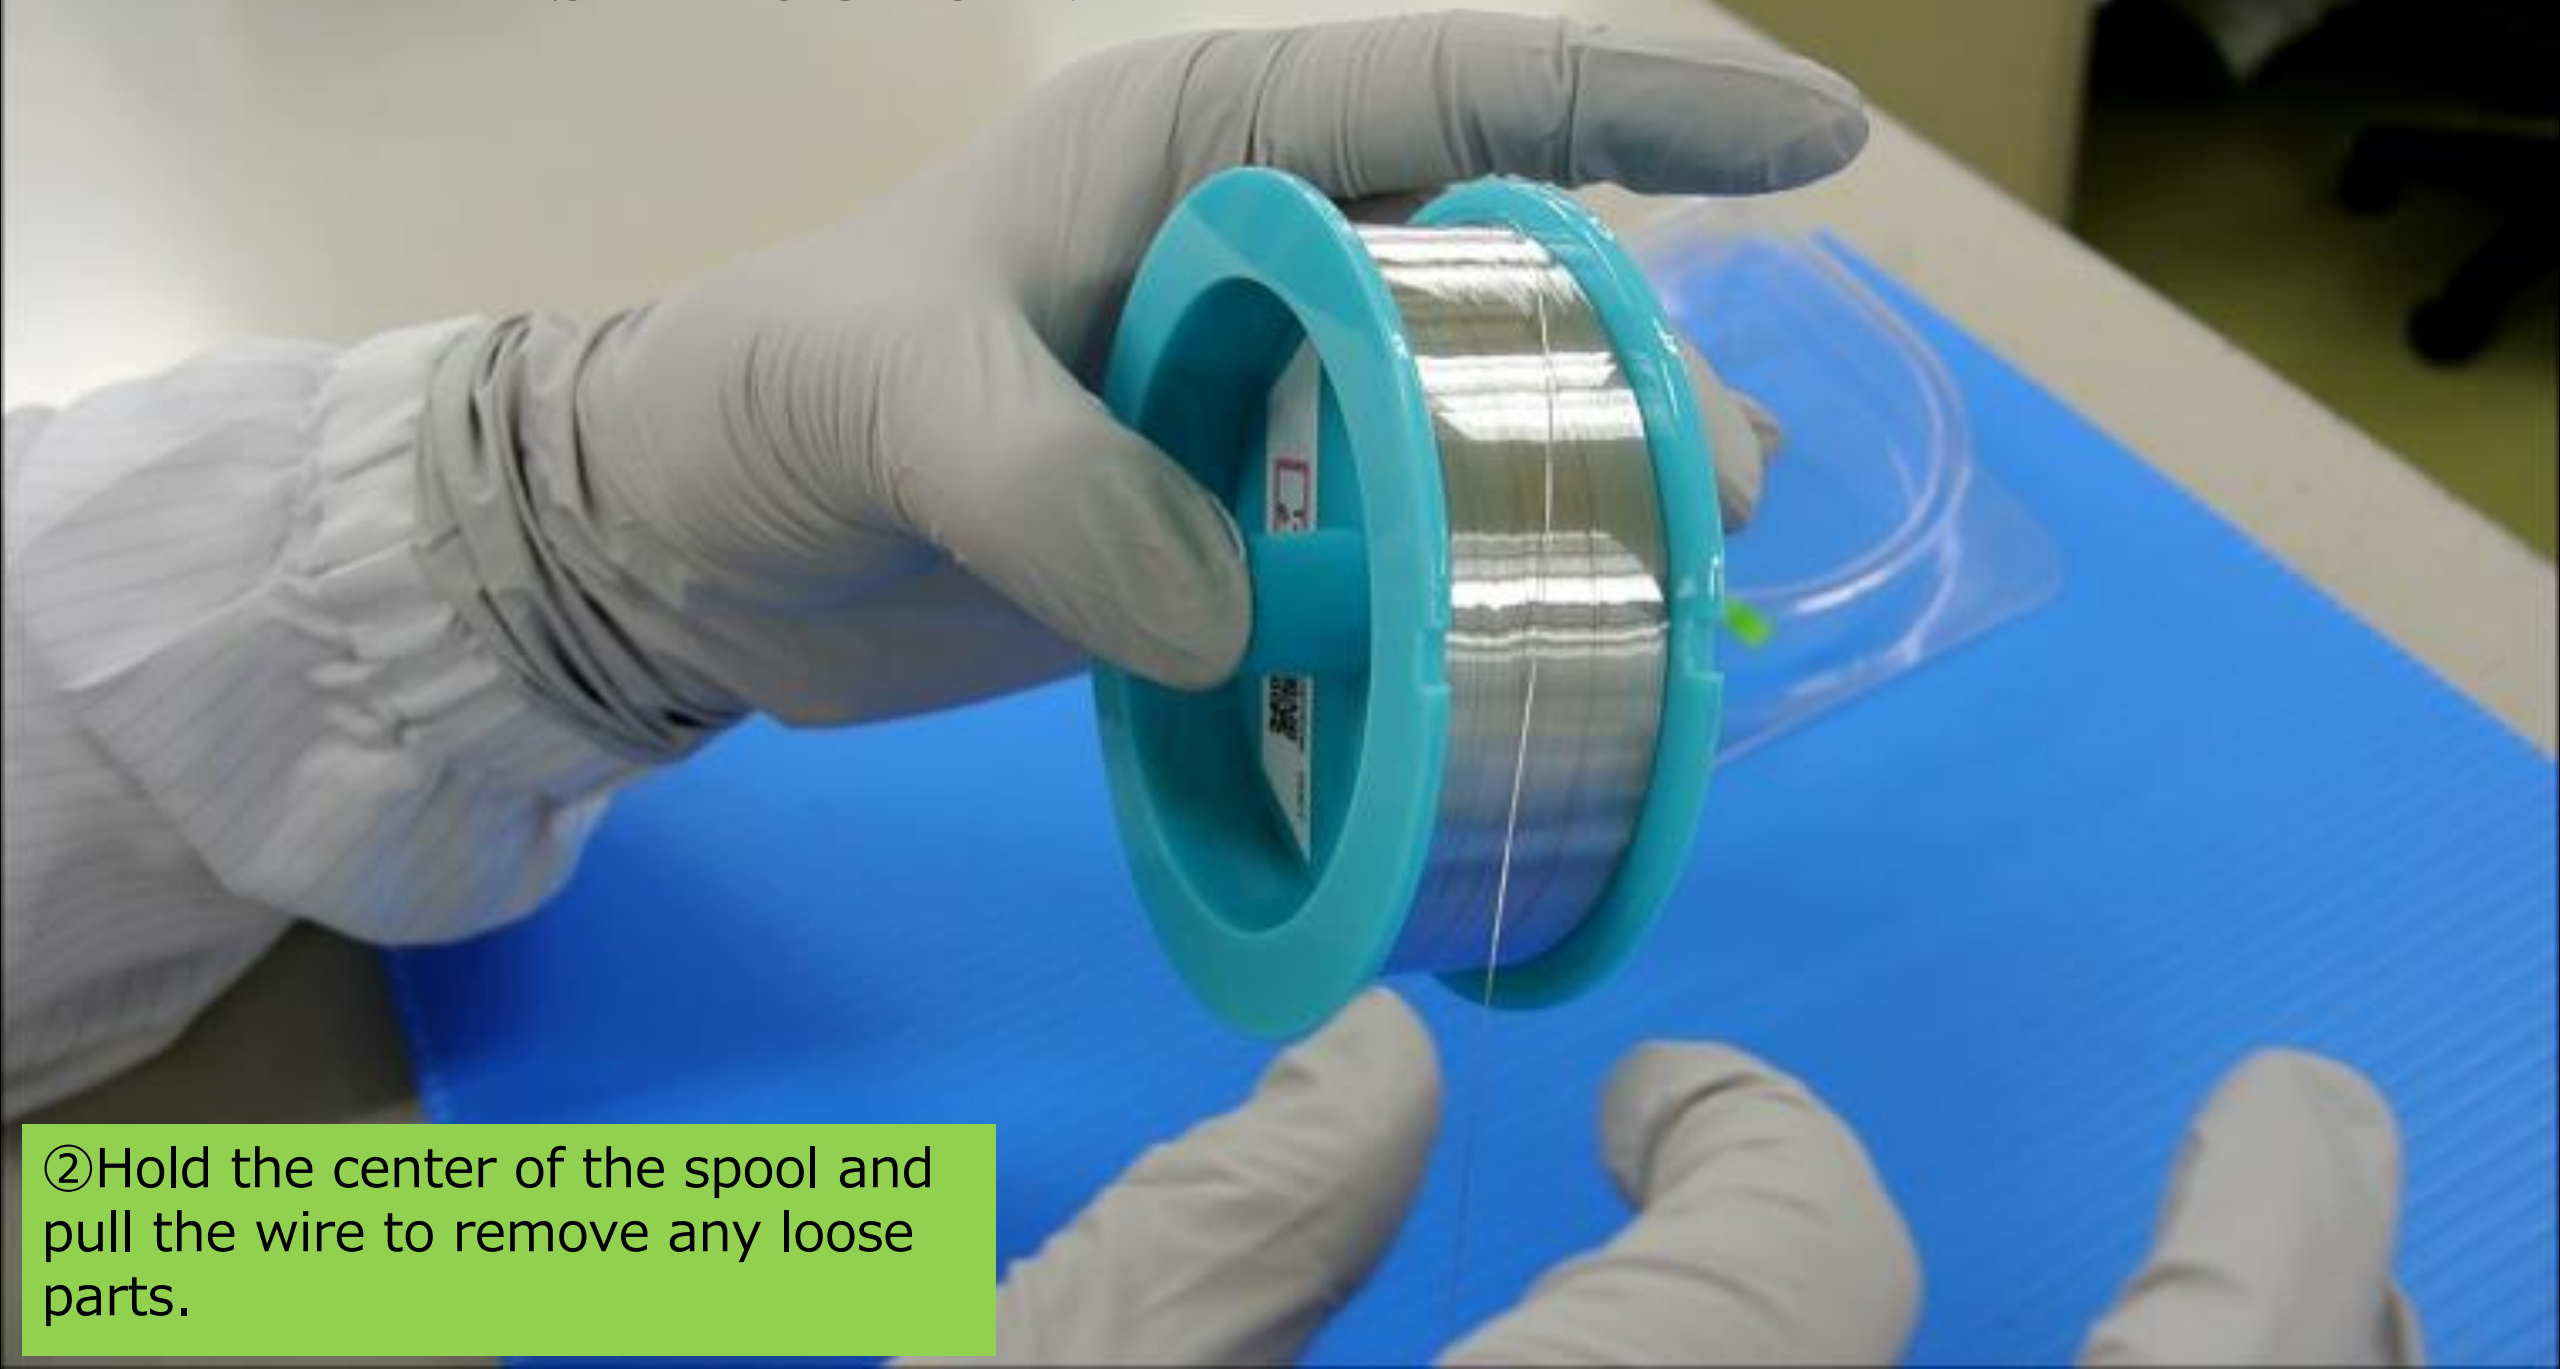

② Hold the center of the spool and pull the wire to remove any loose parts.

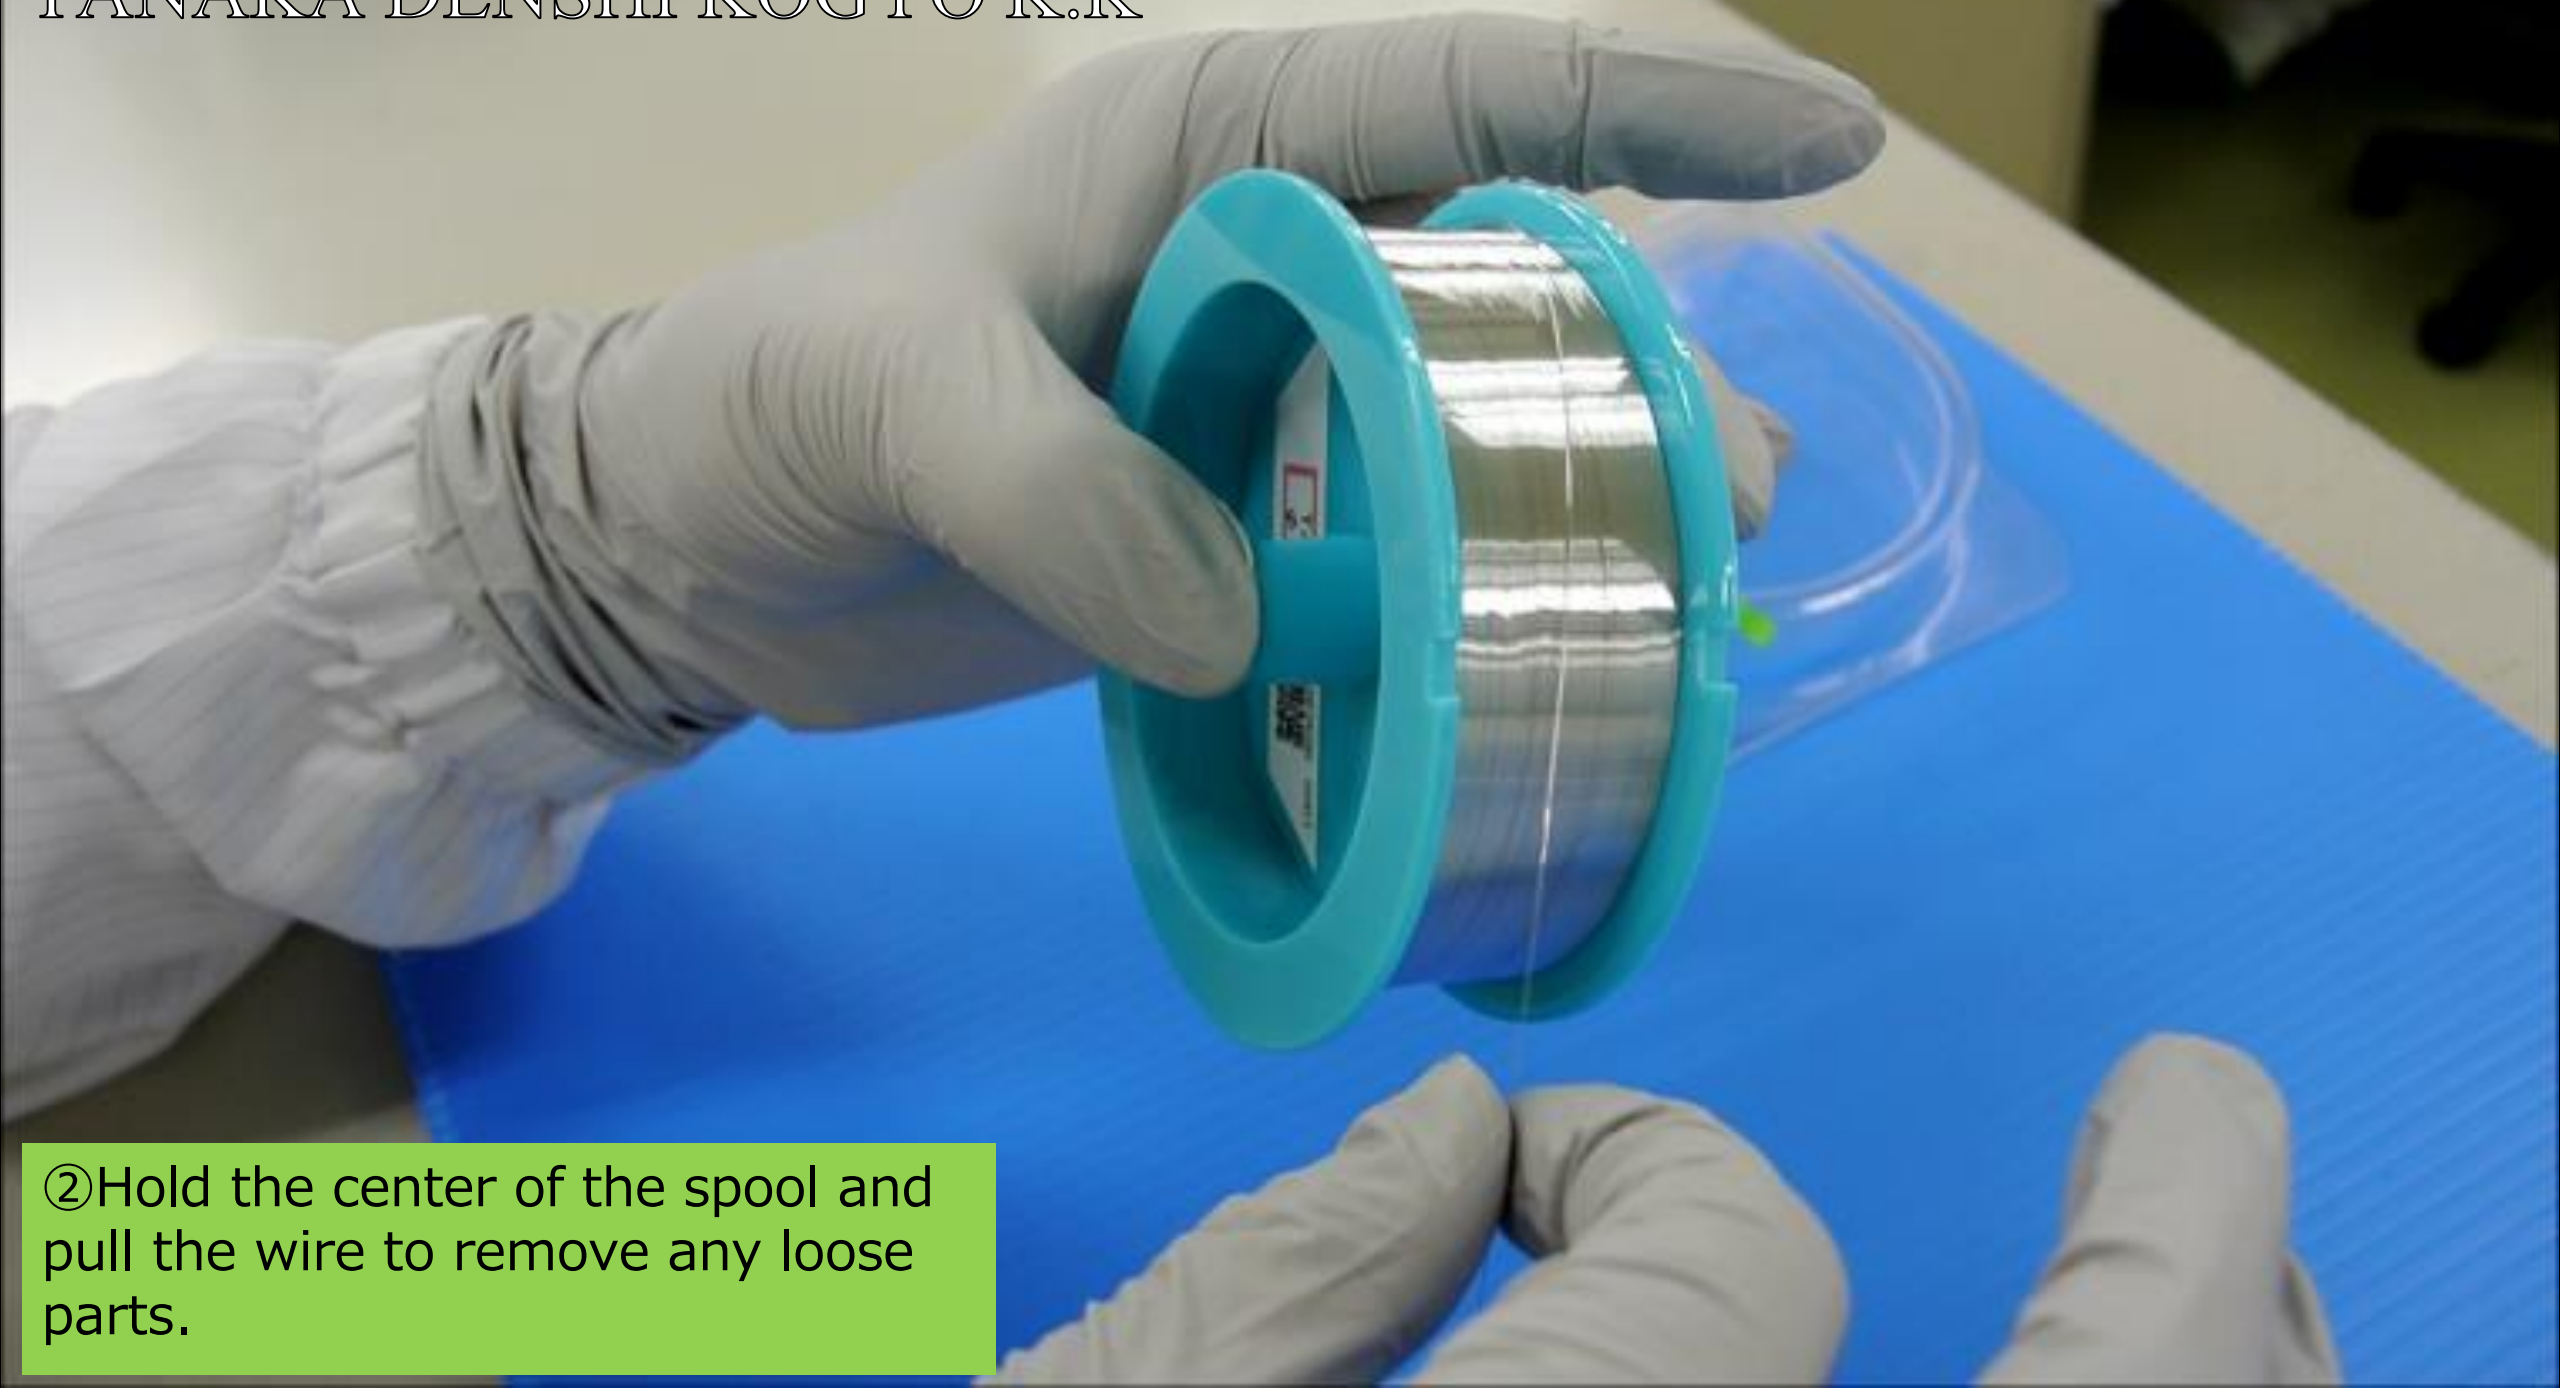


② Hold the center of the spool and pull the wire to remove any loose parts.




② Hold the center of the spool and pull the wire to remove any loose parts.




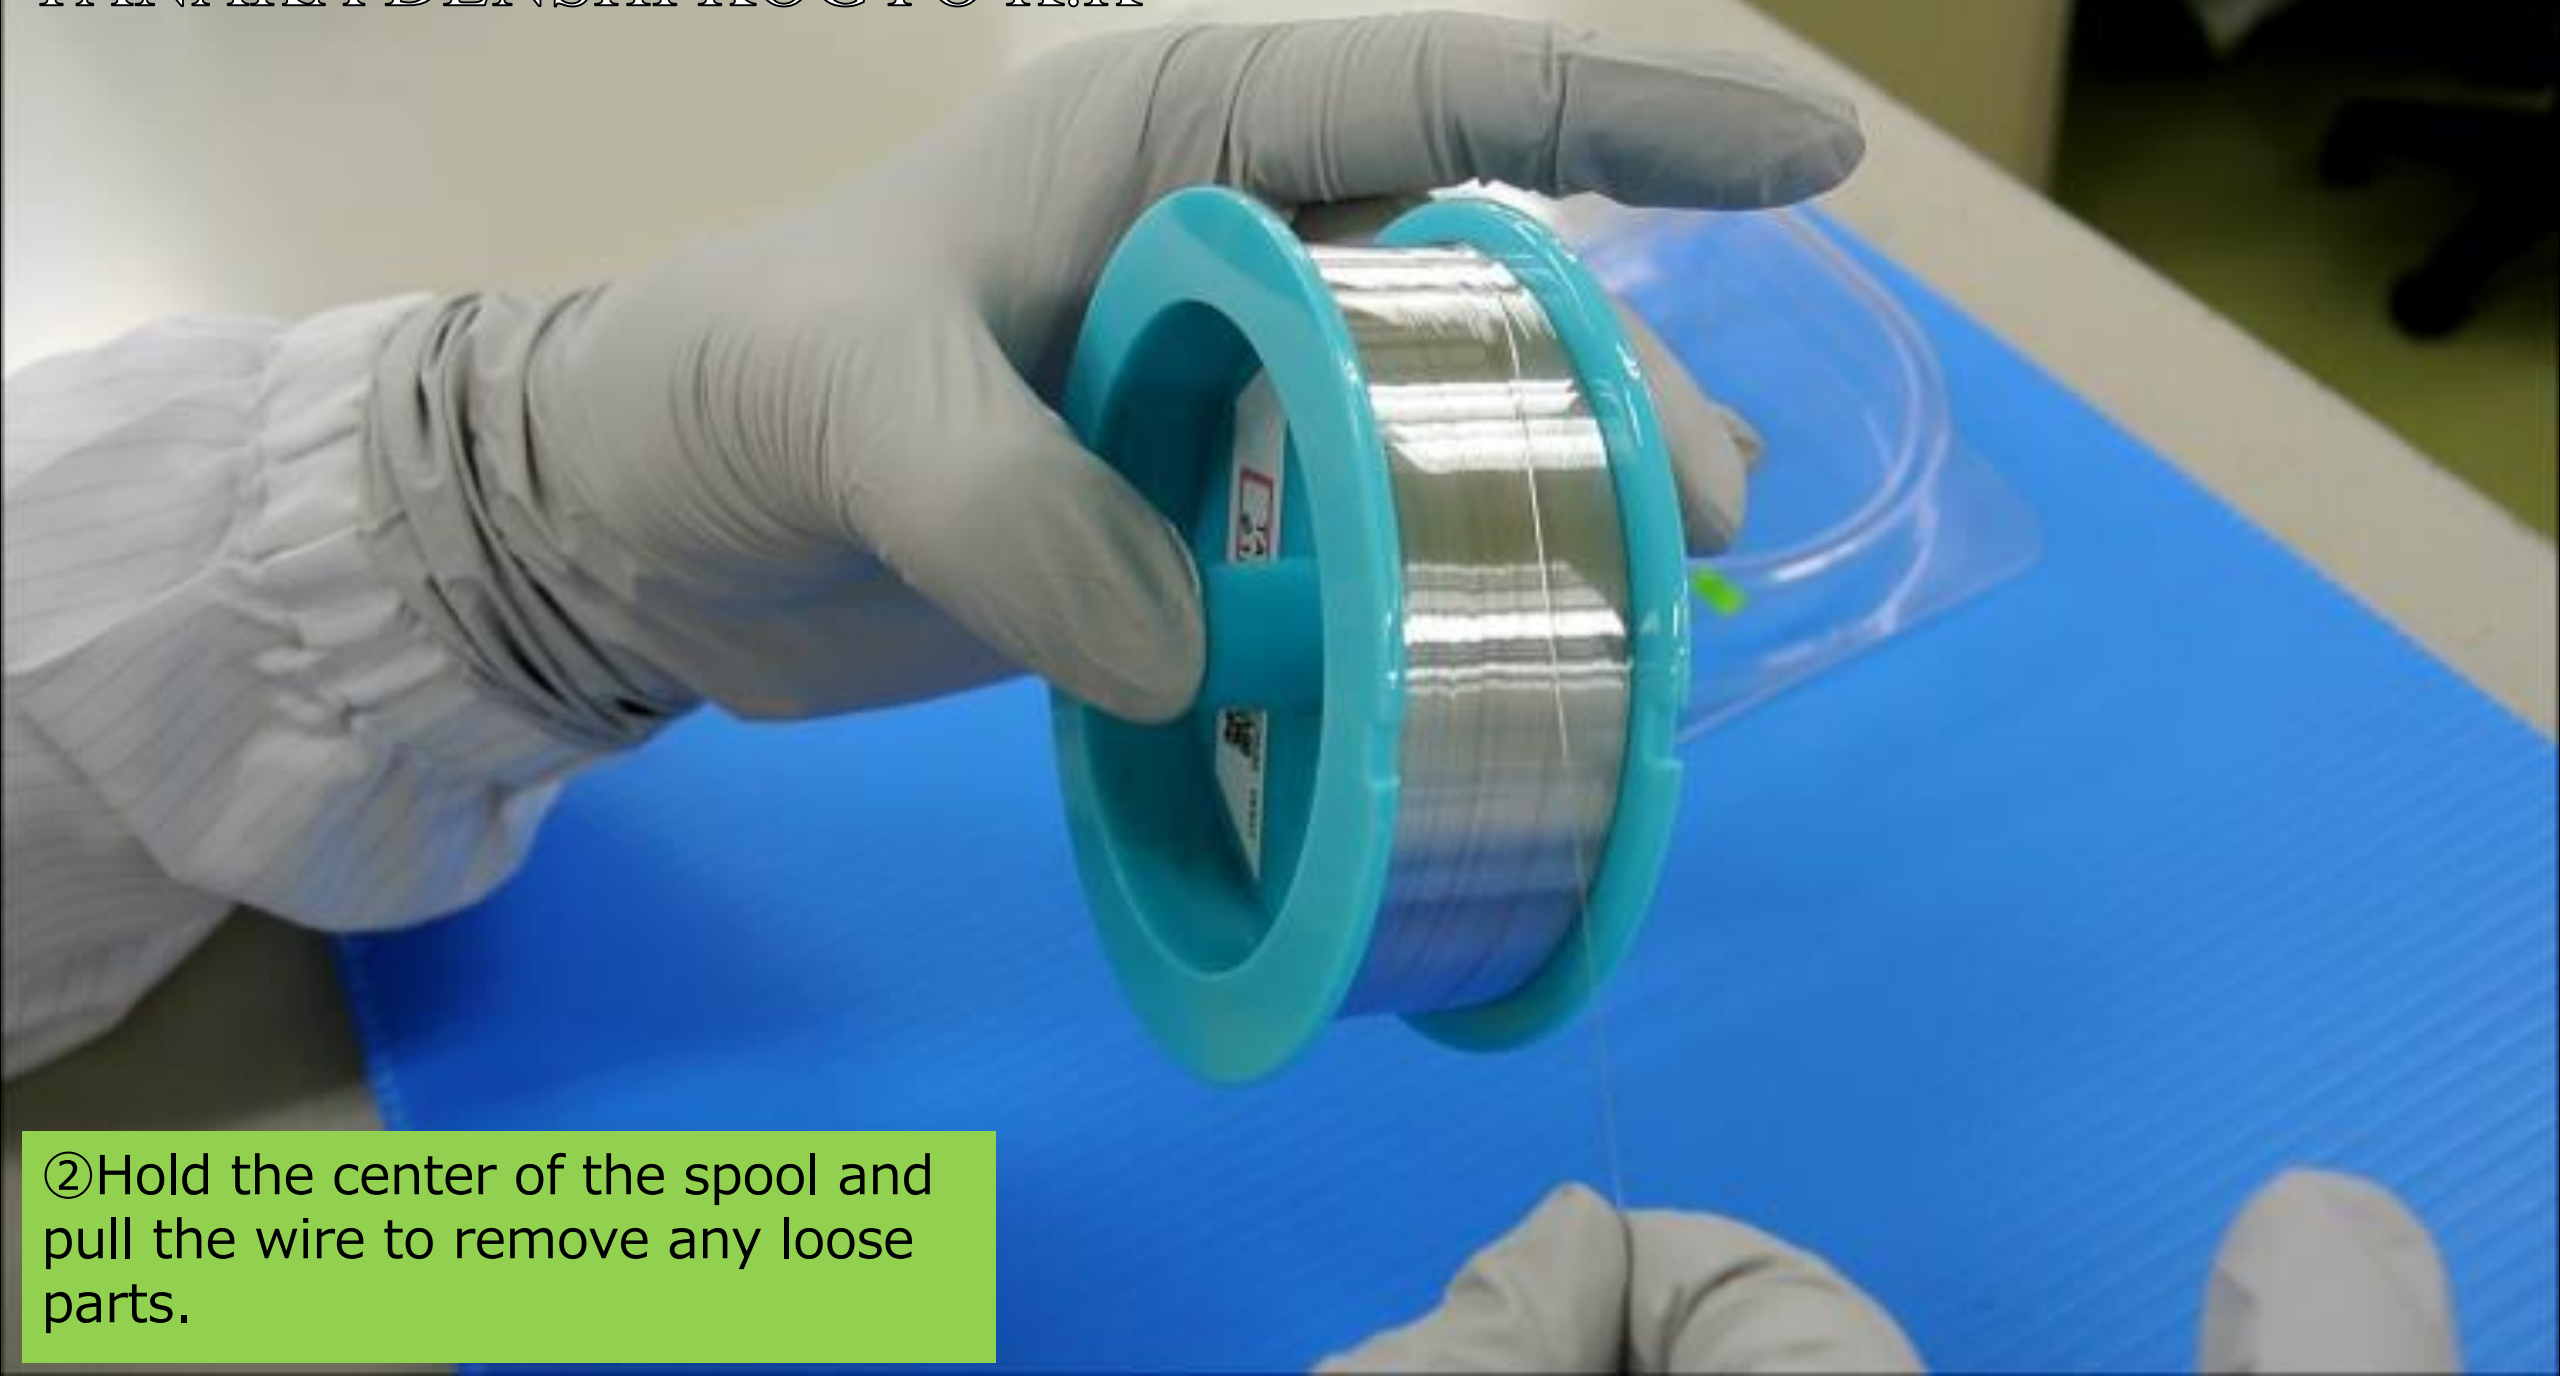

② Hold the center of the spool and pull the wire to remove any loose parts.

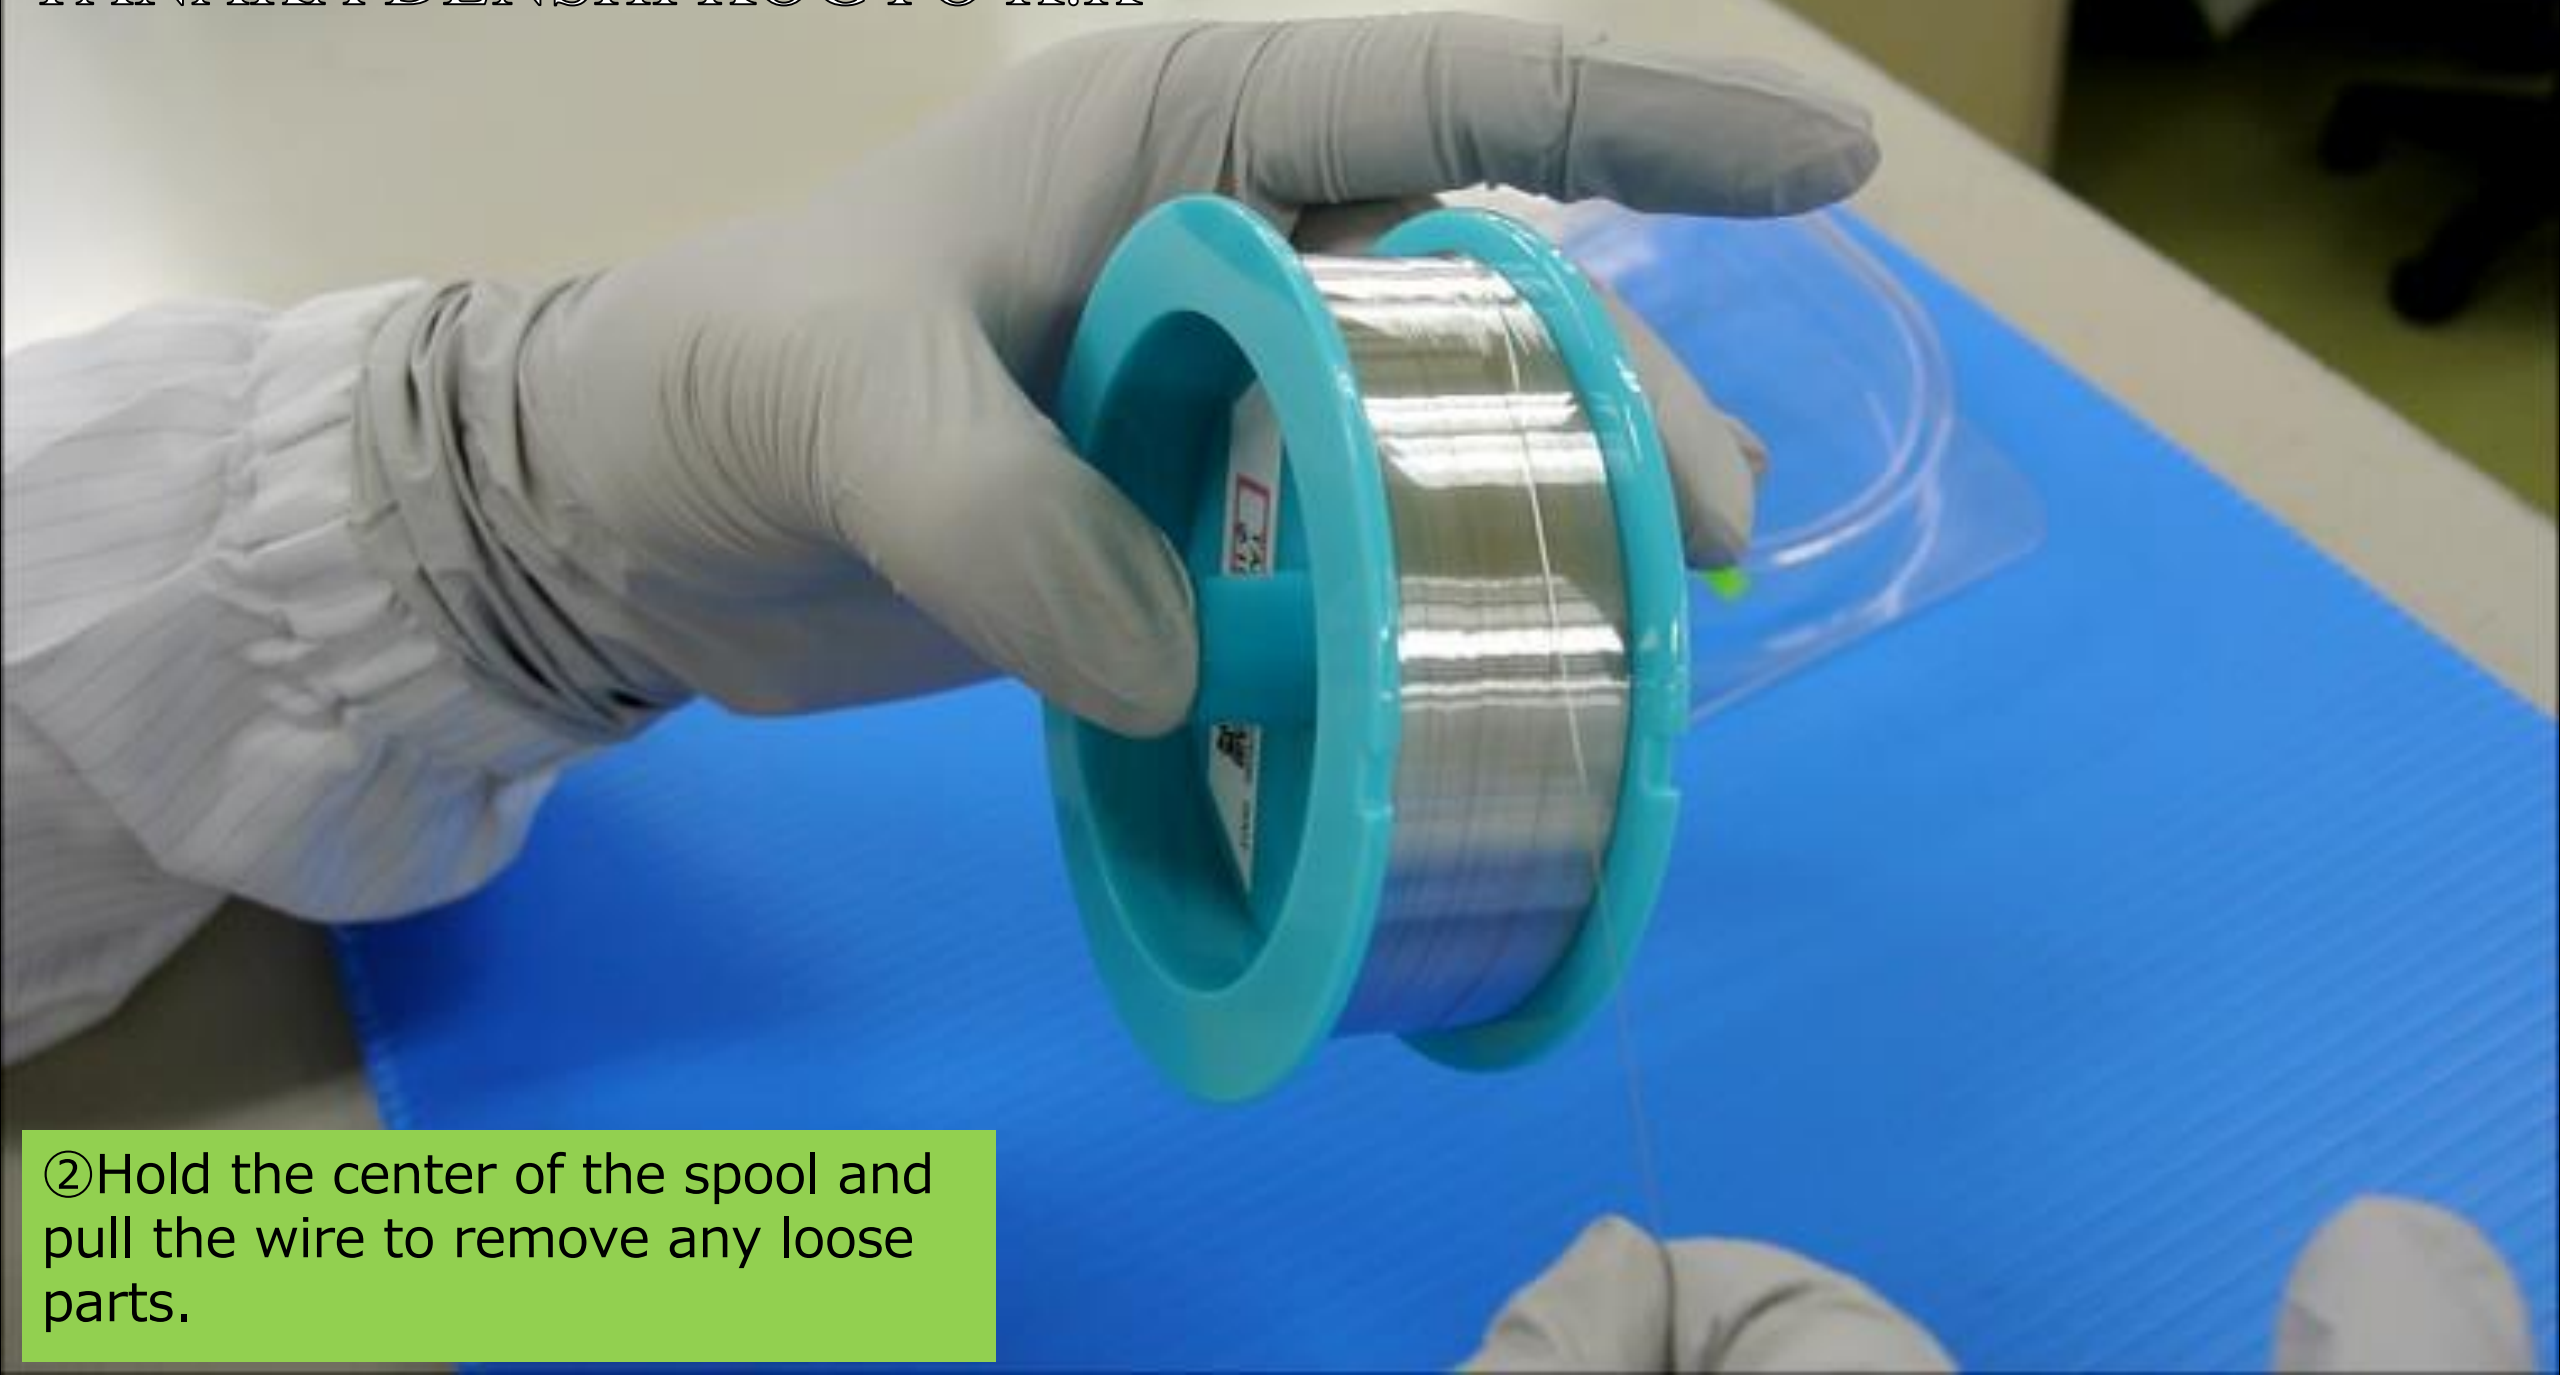


② Hold the center of the spool and pull the wire to remove any loose parts.

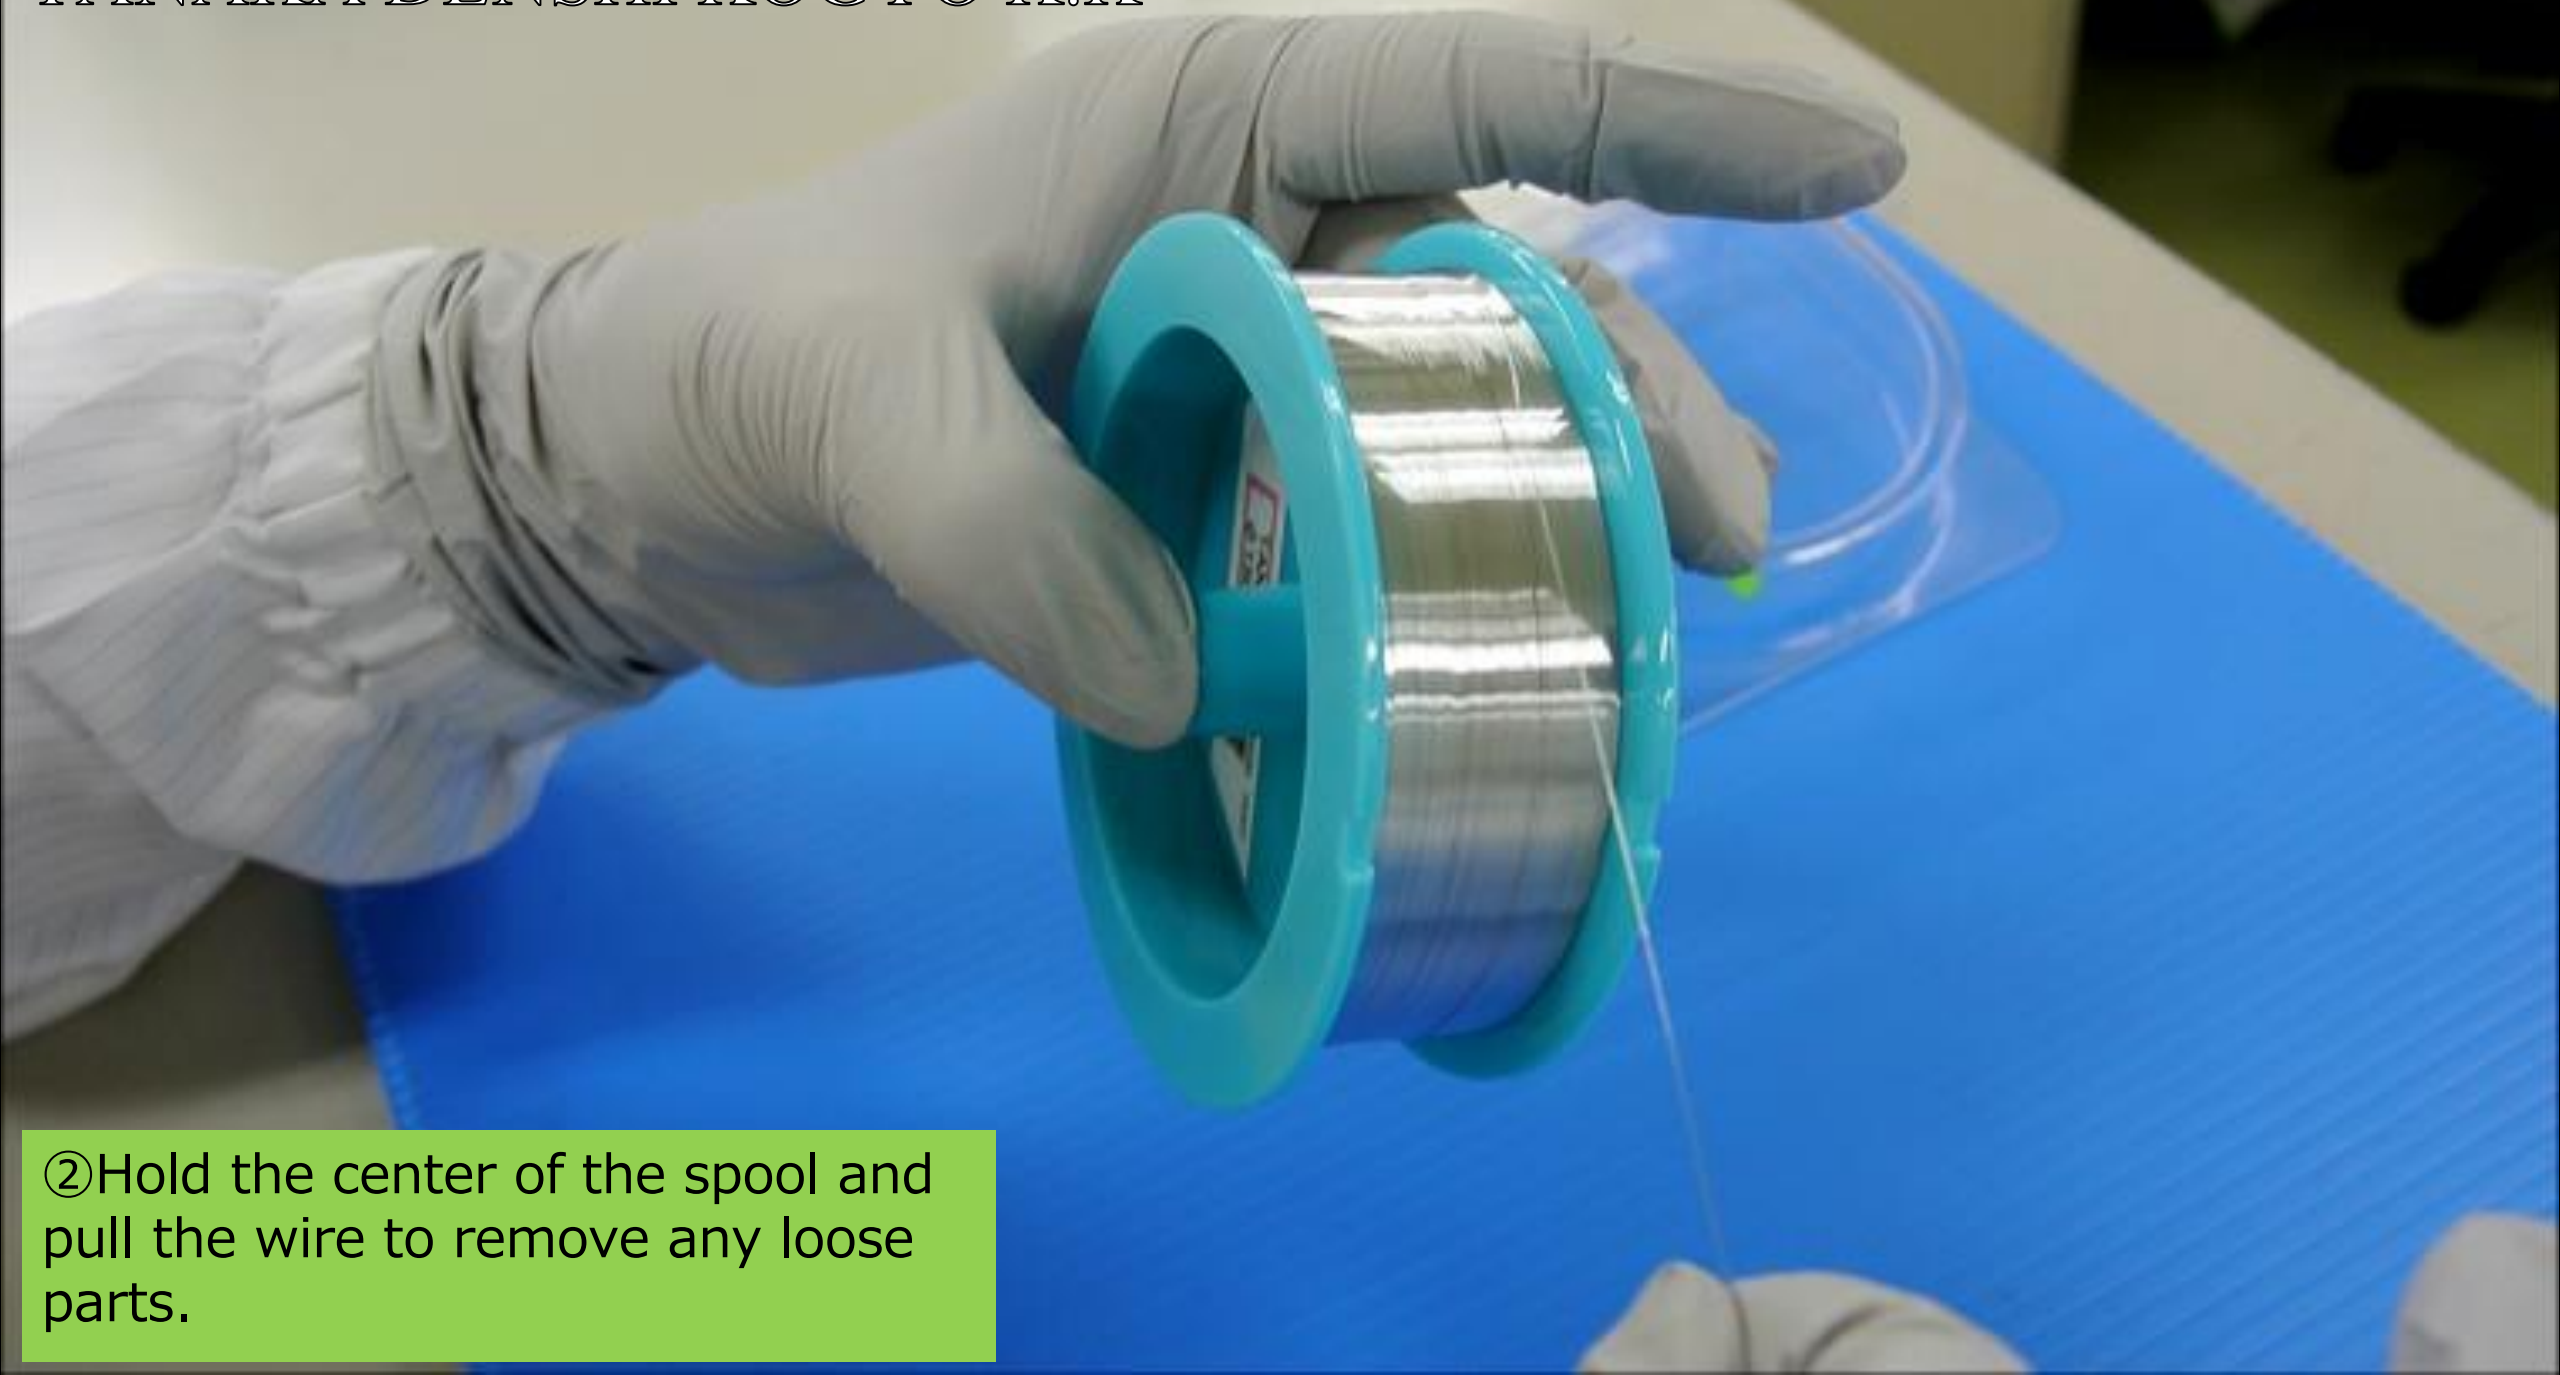


② Hold the center of the spool and pull the wire to remove any loose parts.



② Hold the center of the spool and pull the wire to remove any loose parts.

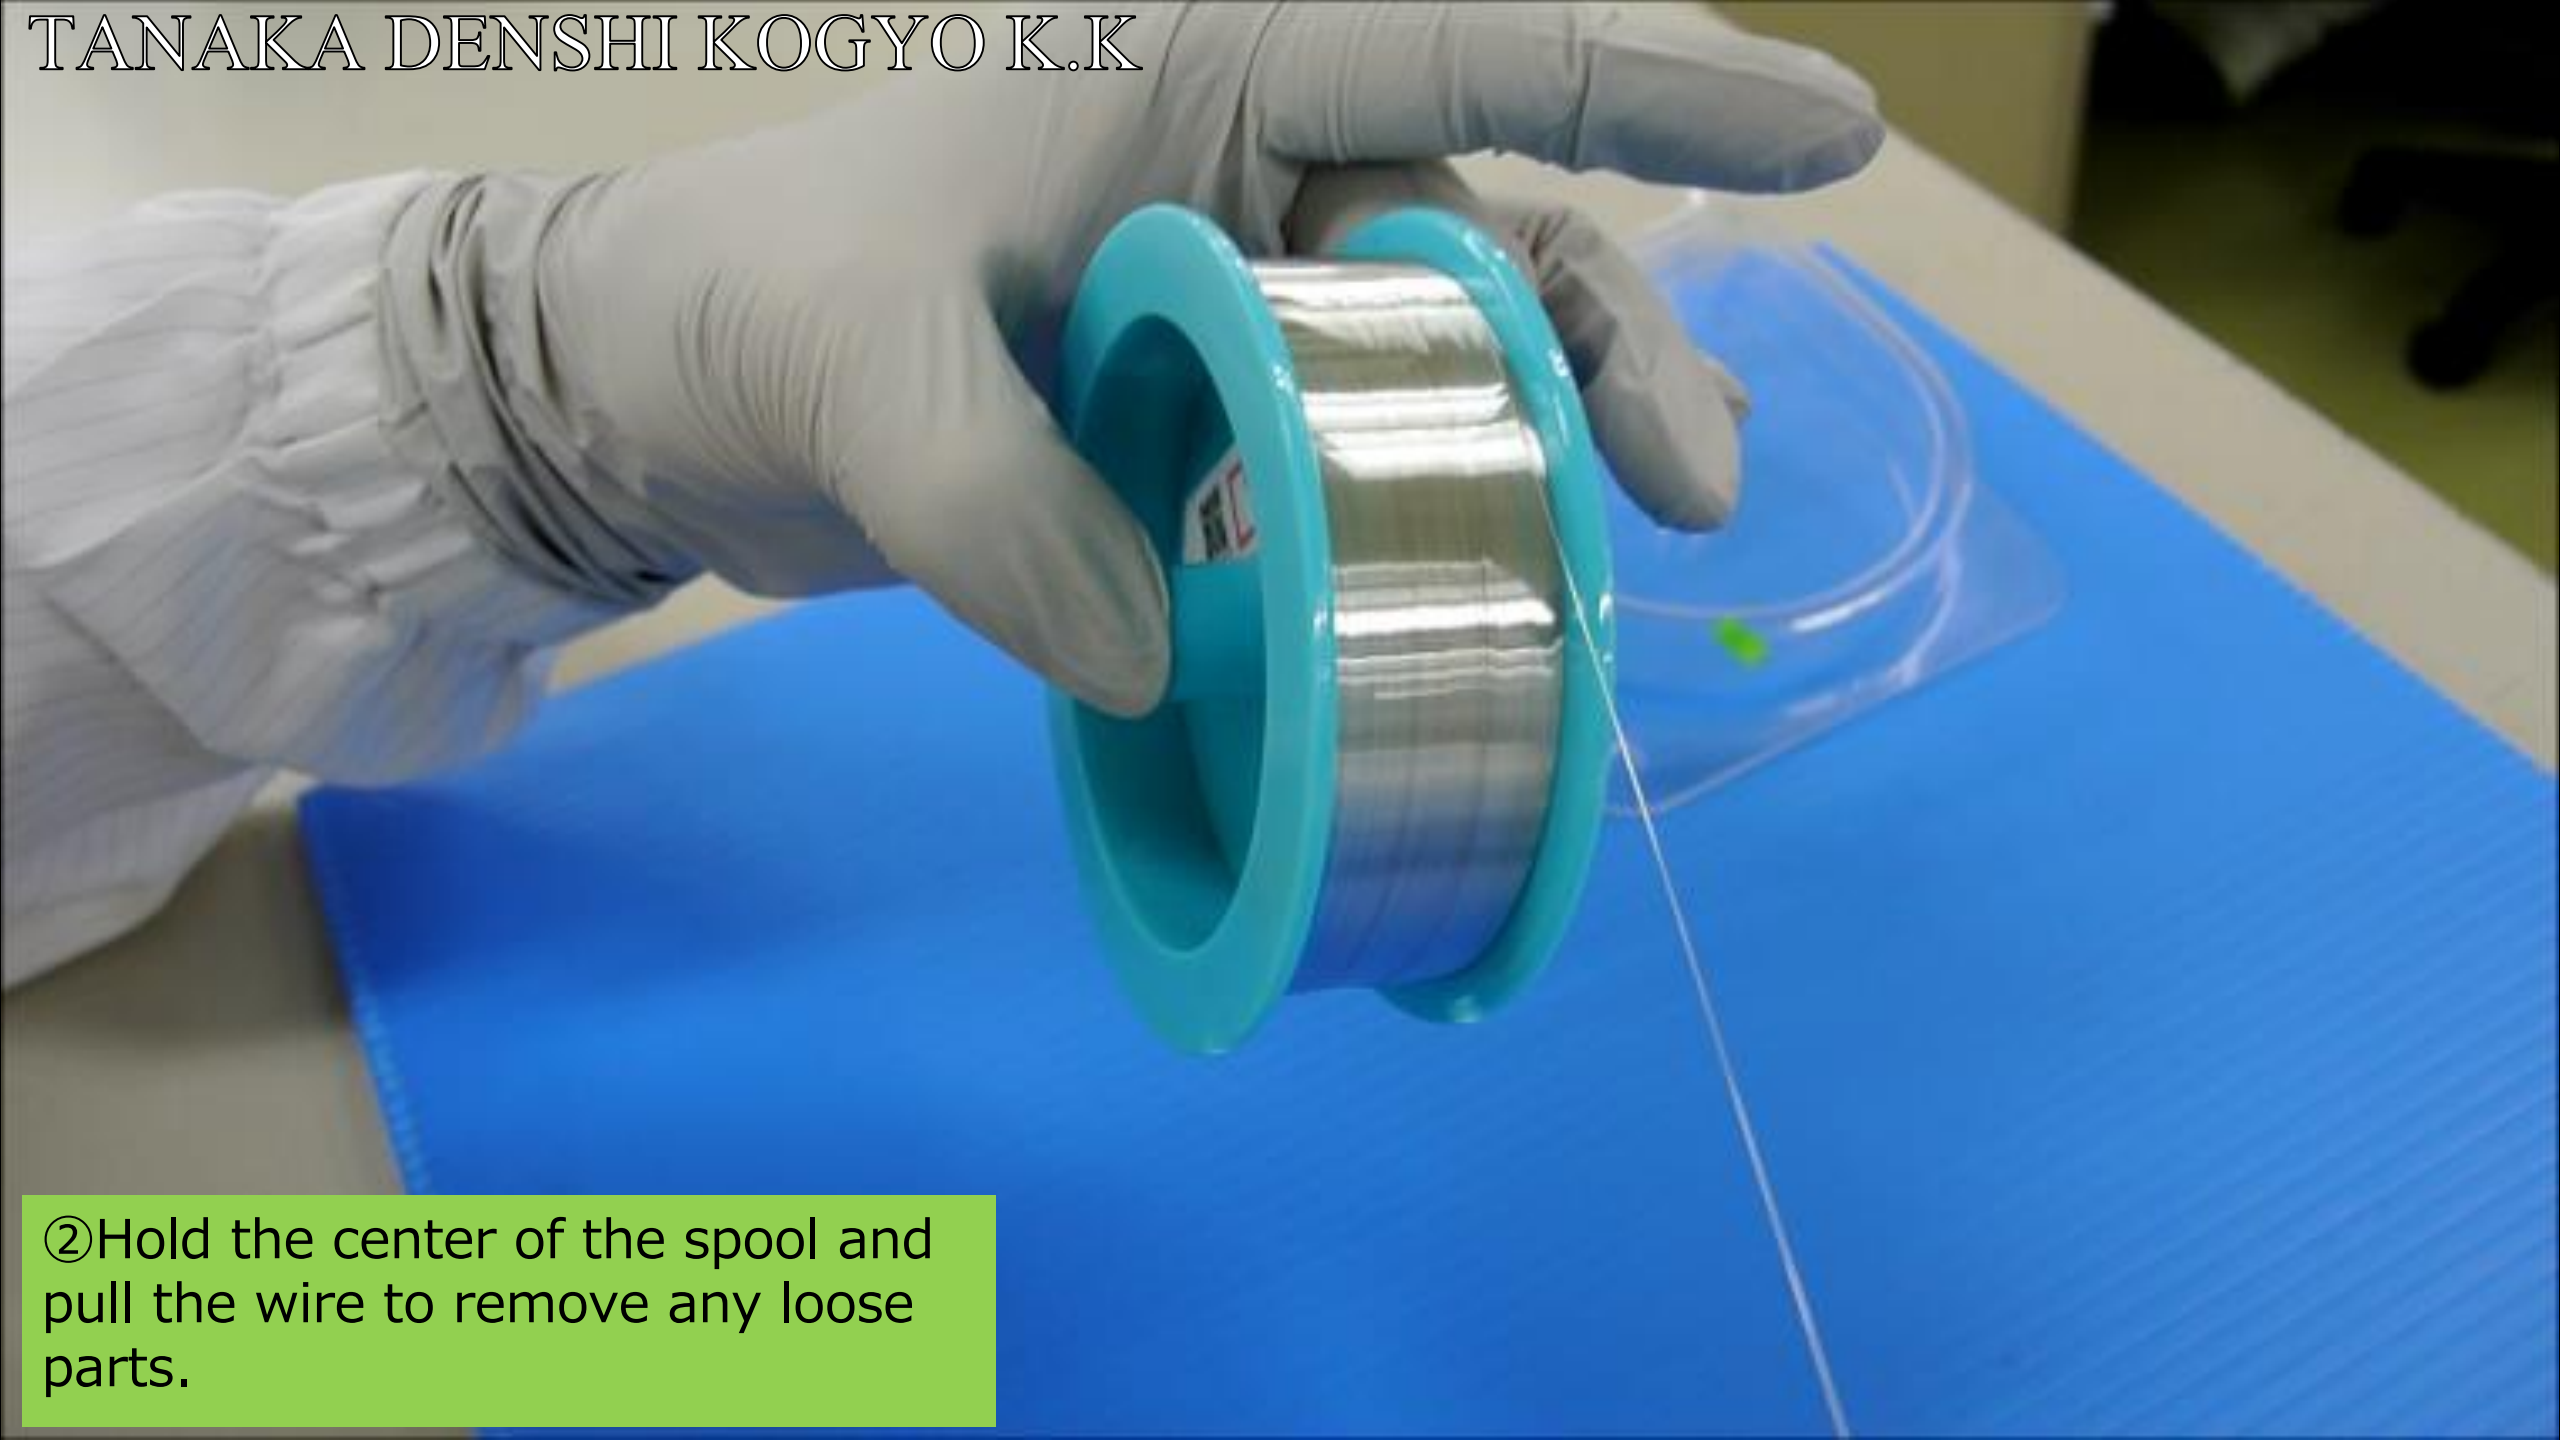

② Hold the center of the spool and pull the wire to remove any loose parts.

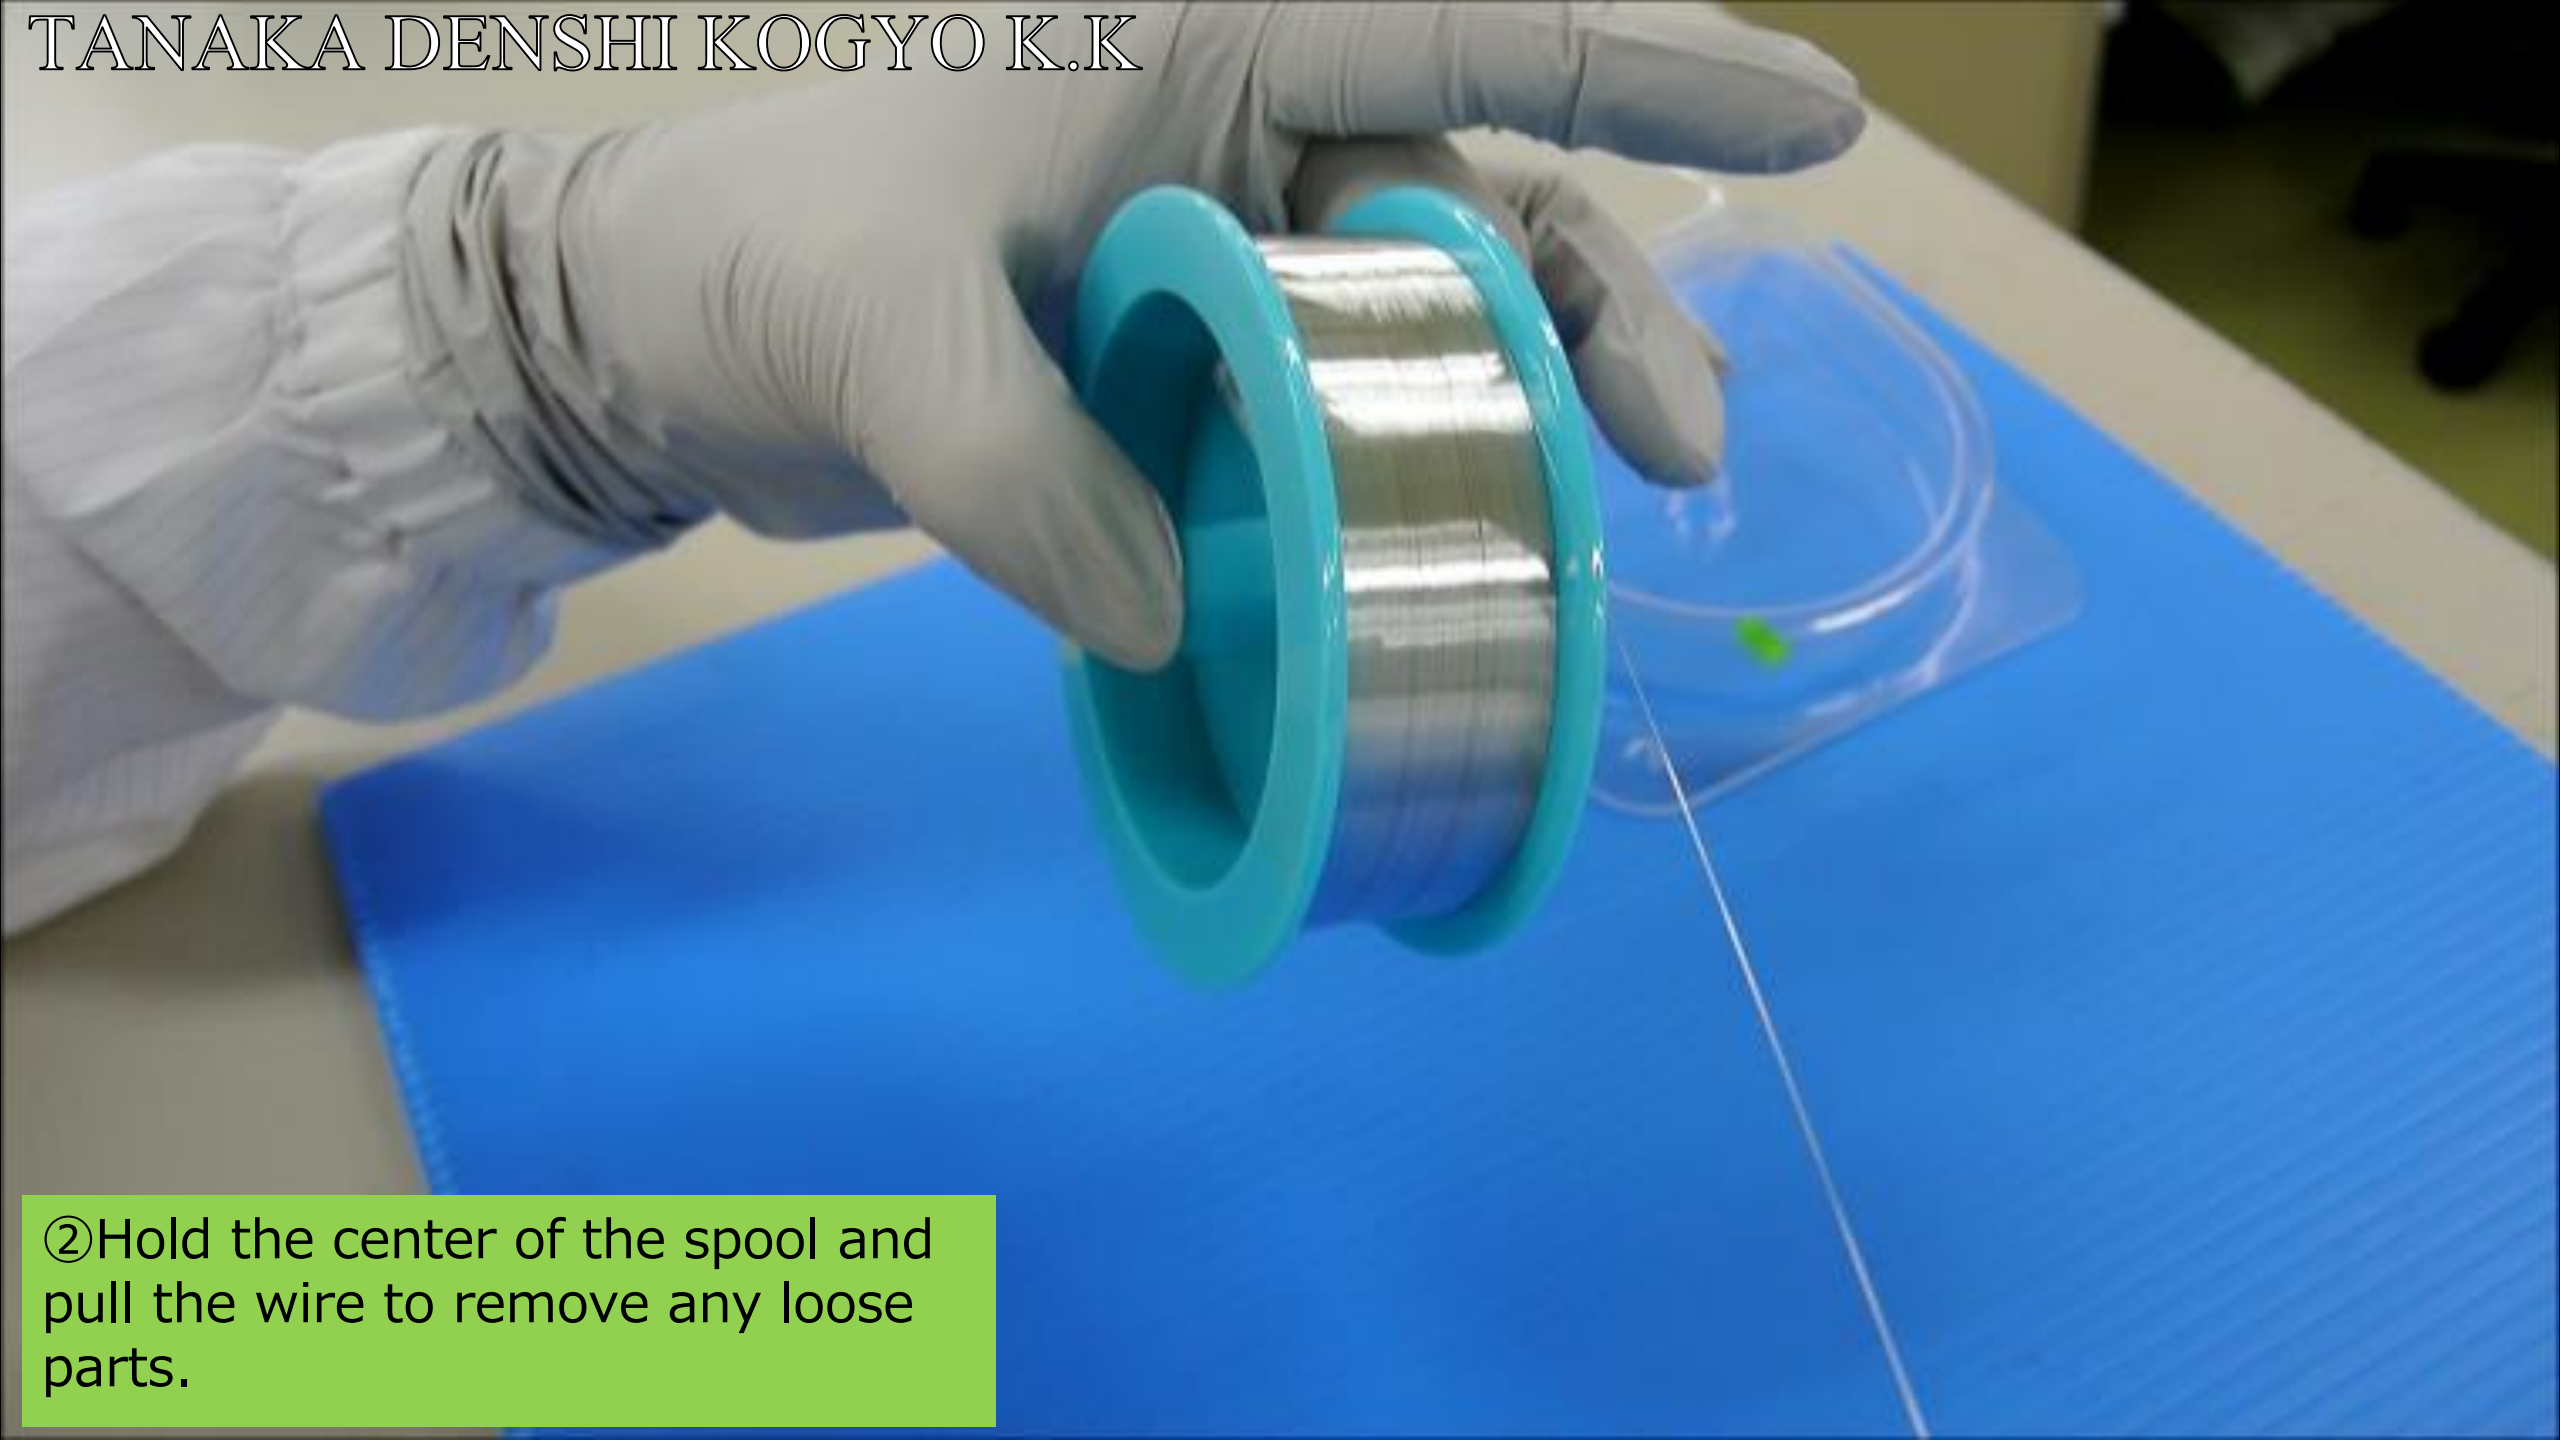

② Hold the center of the spool and pull the wire to remove any loose parts.



② Hold the center of the spool and pull the wire to remove any loose parts.



② Hold the center of the spool and pull the wire to remove any loose parts.





② Hold the center of the spool and pull the wire to remove any loose parts.



② Hold the center of the spool and pull the wire to remove any loose parts.




② Hold the center of the spool and pull the wire to remove any loose parts.




② Hold the center of the spool and pull the wire to remove any loose parts.



② Hold the center of the spool and pull the wire to remove any loose parts.

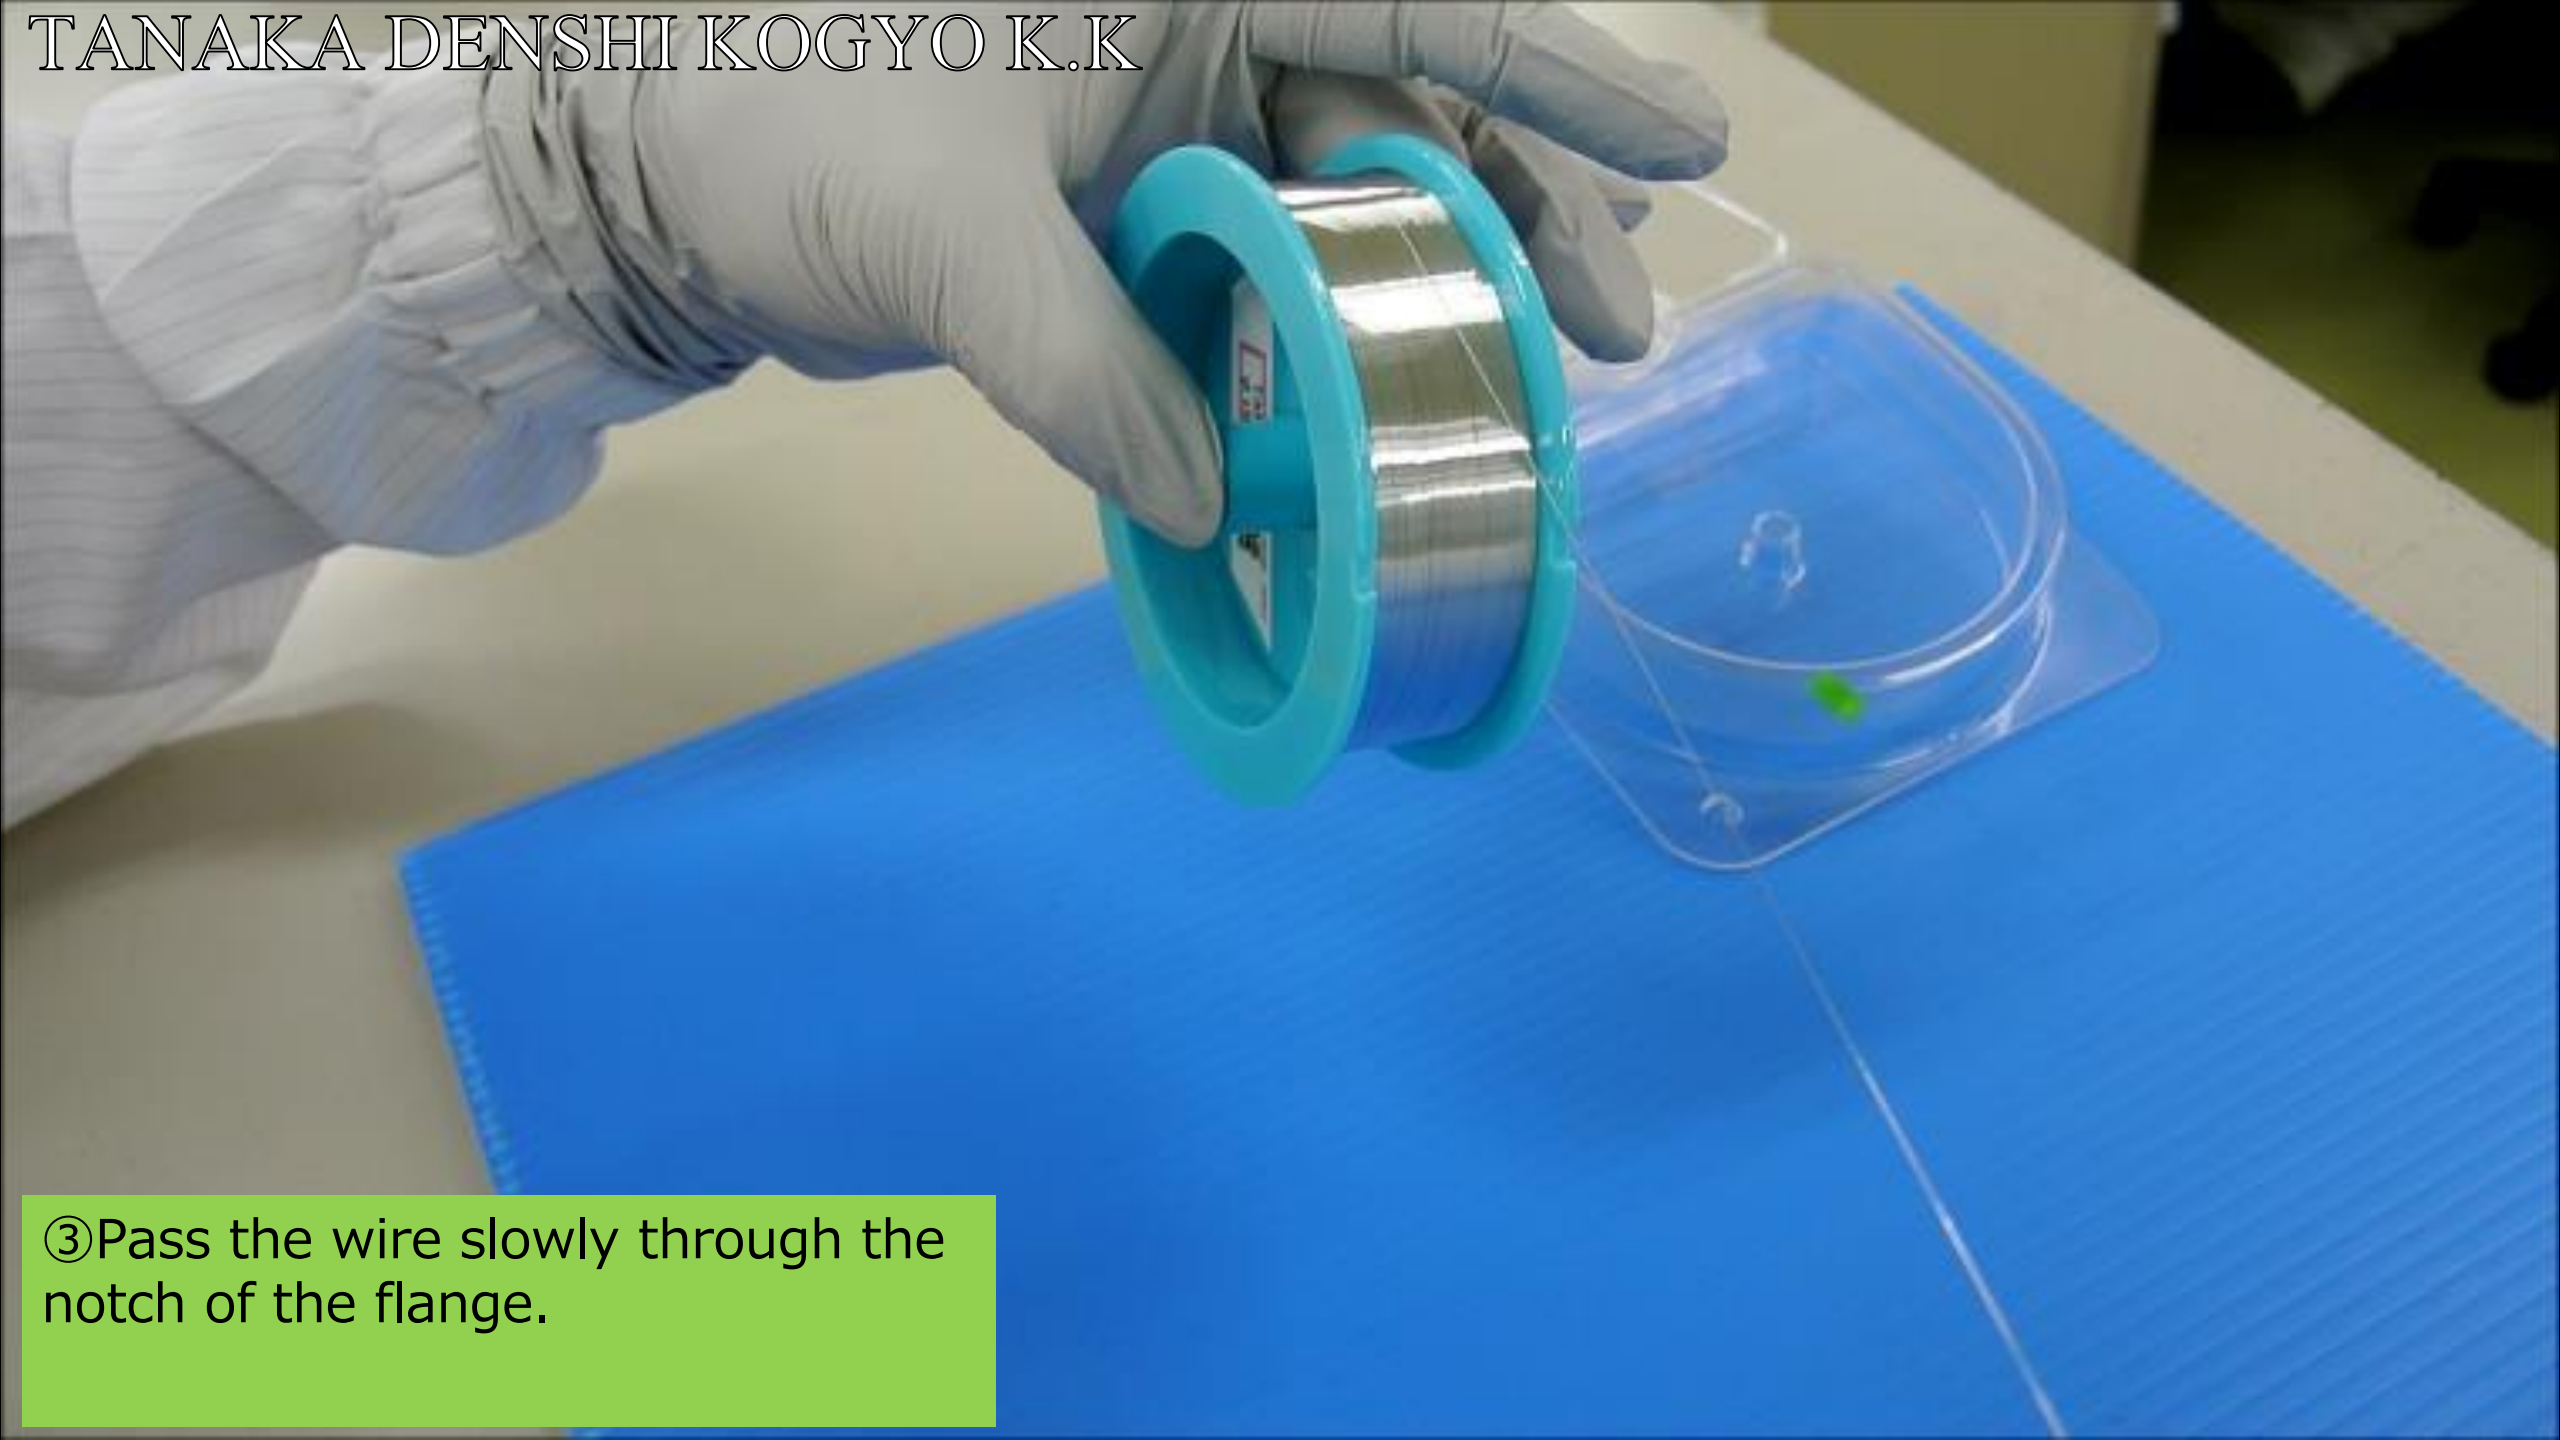

③ Pass the wire slowly through the notch of the flange.

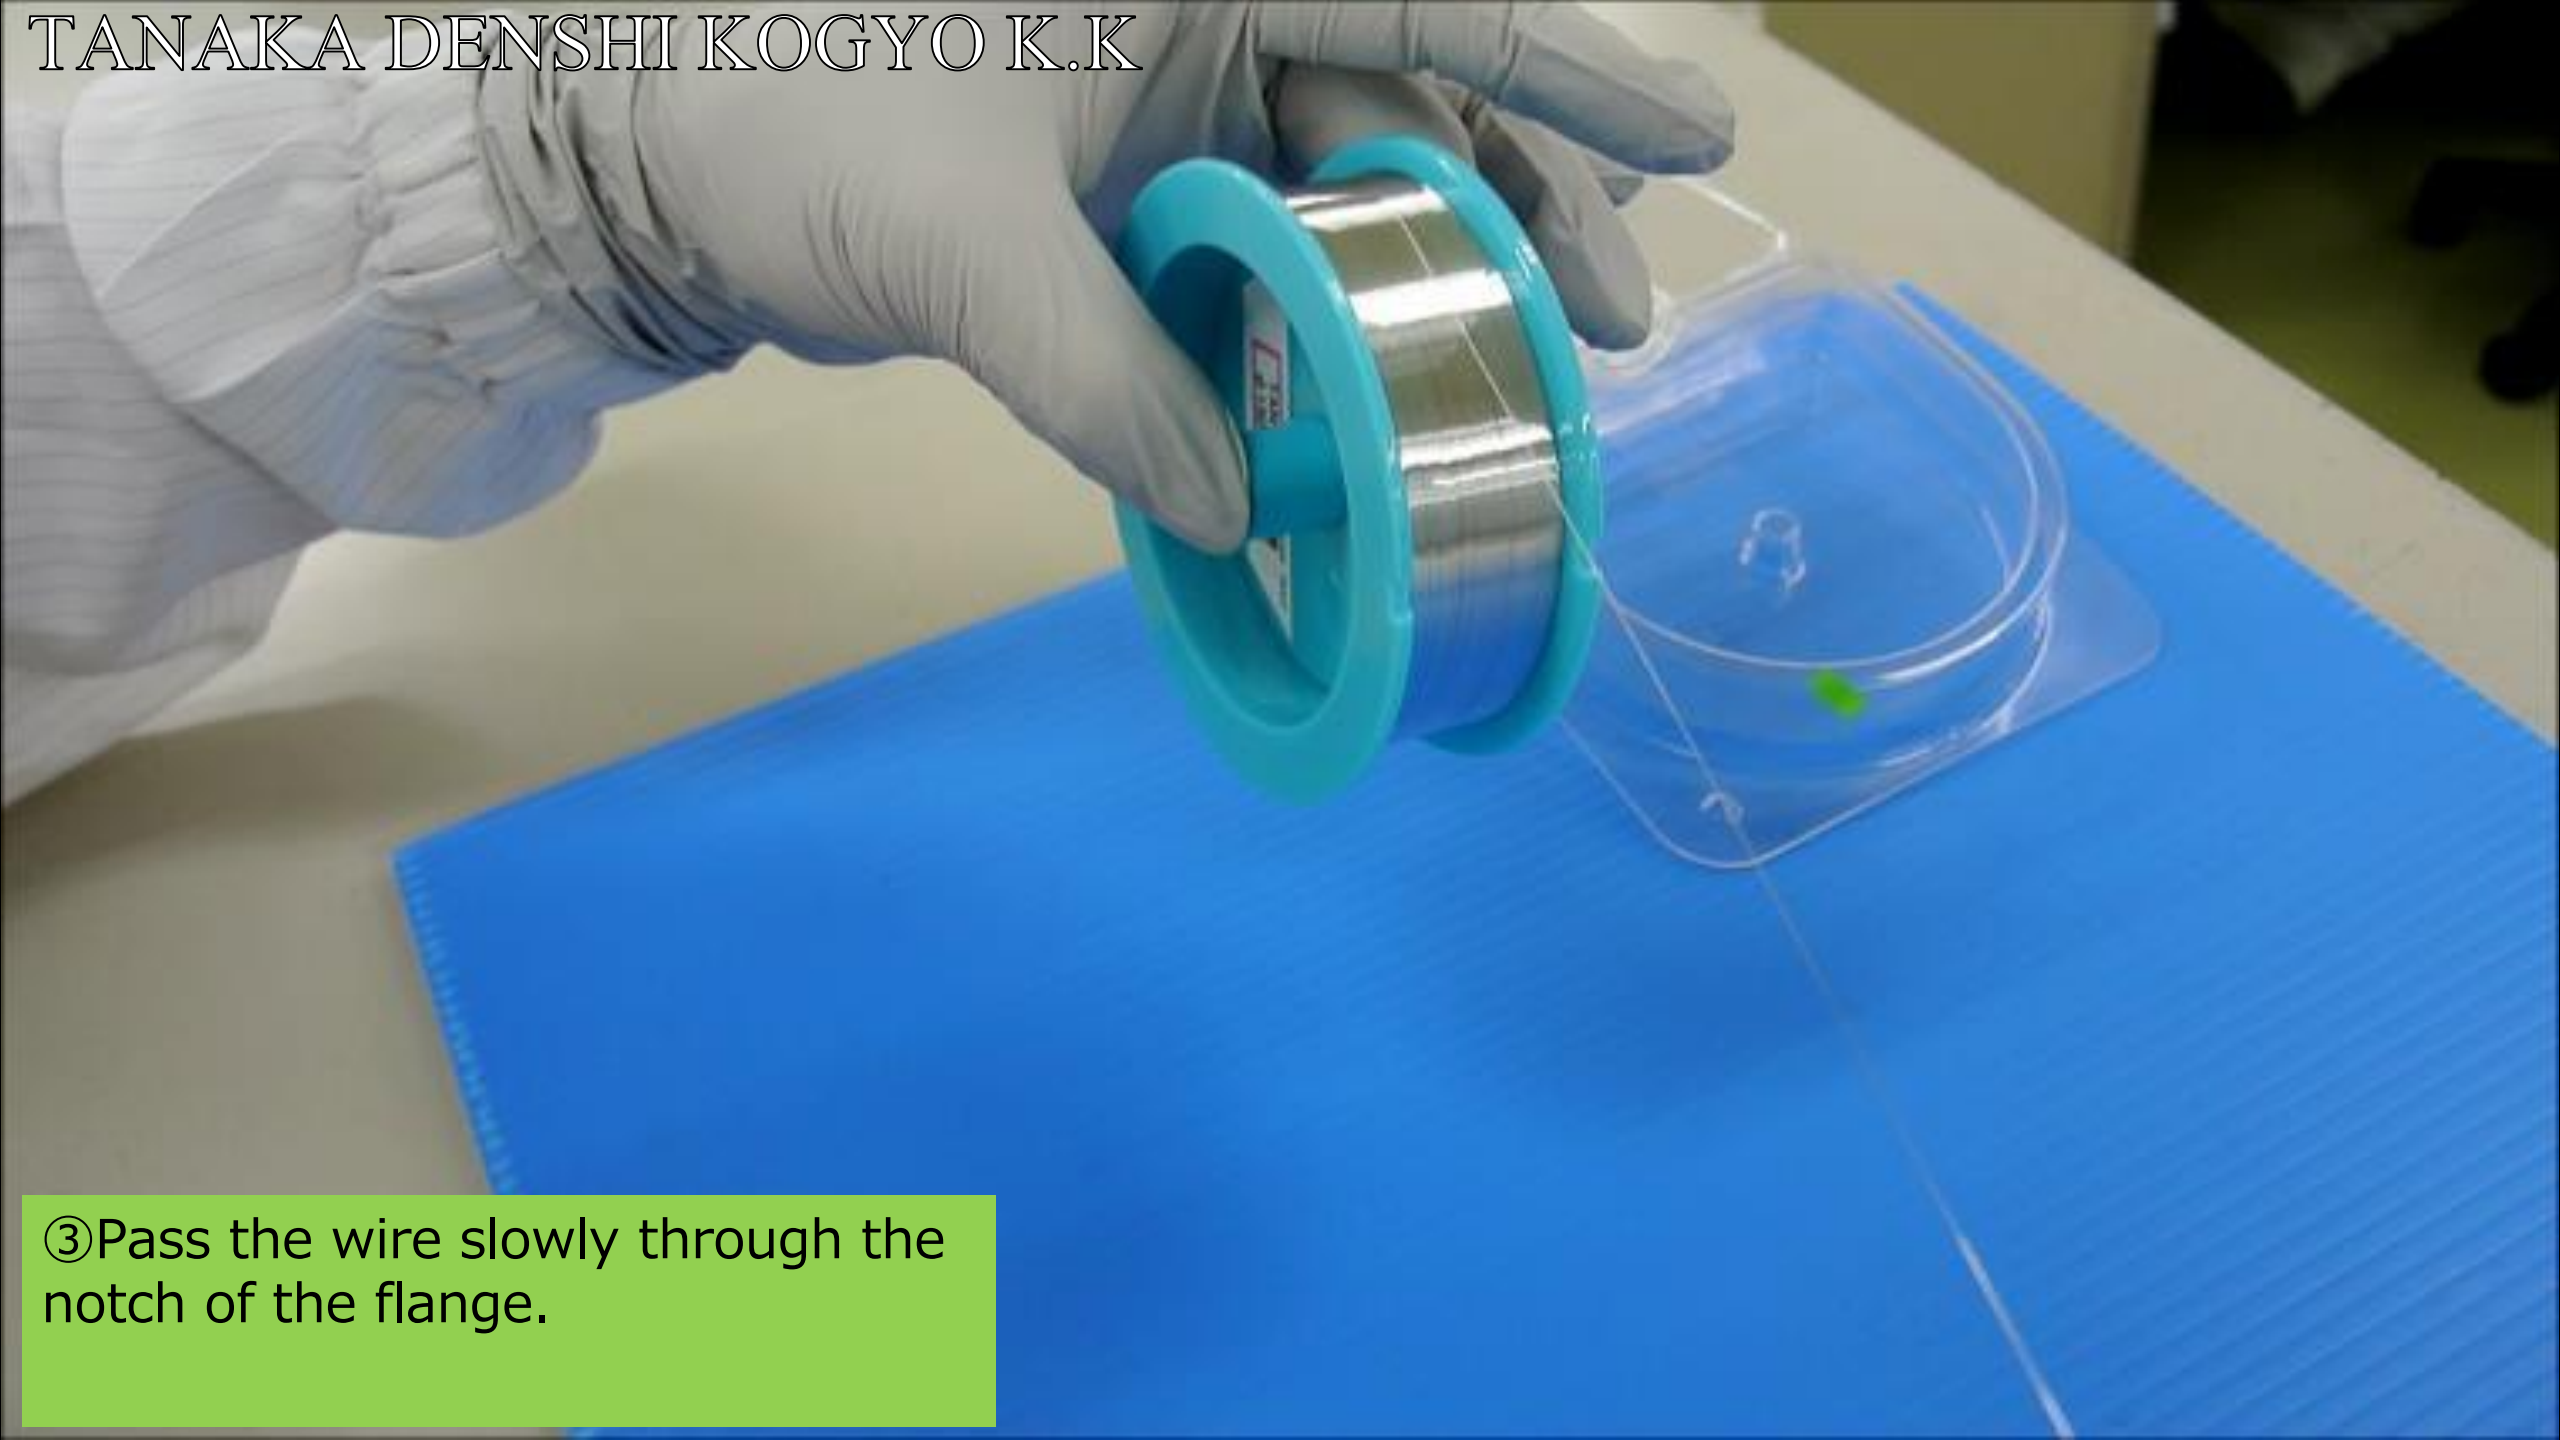


③ Pass the wire slowly through the notch of the flange.




③ Pass the wire slowly through the notch of the flange.




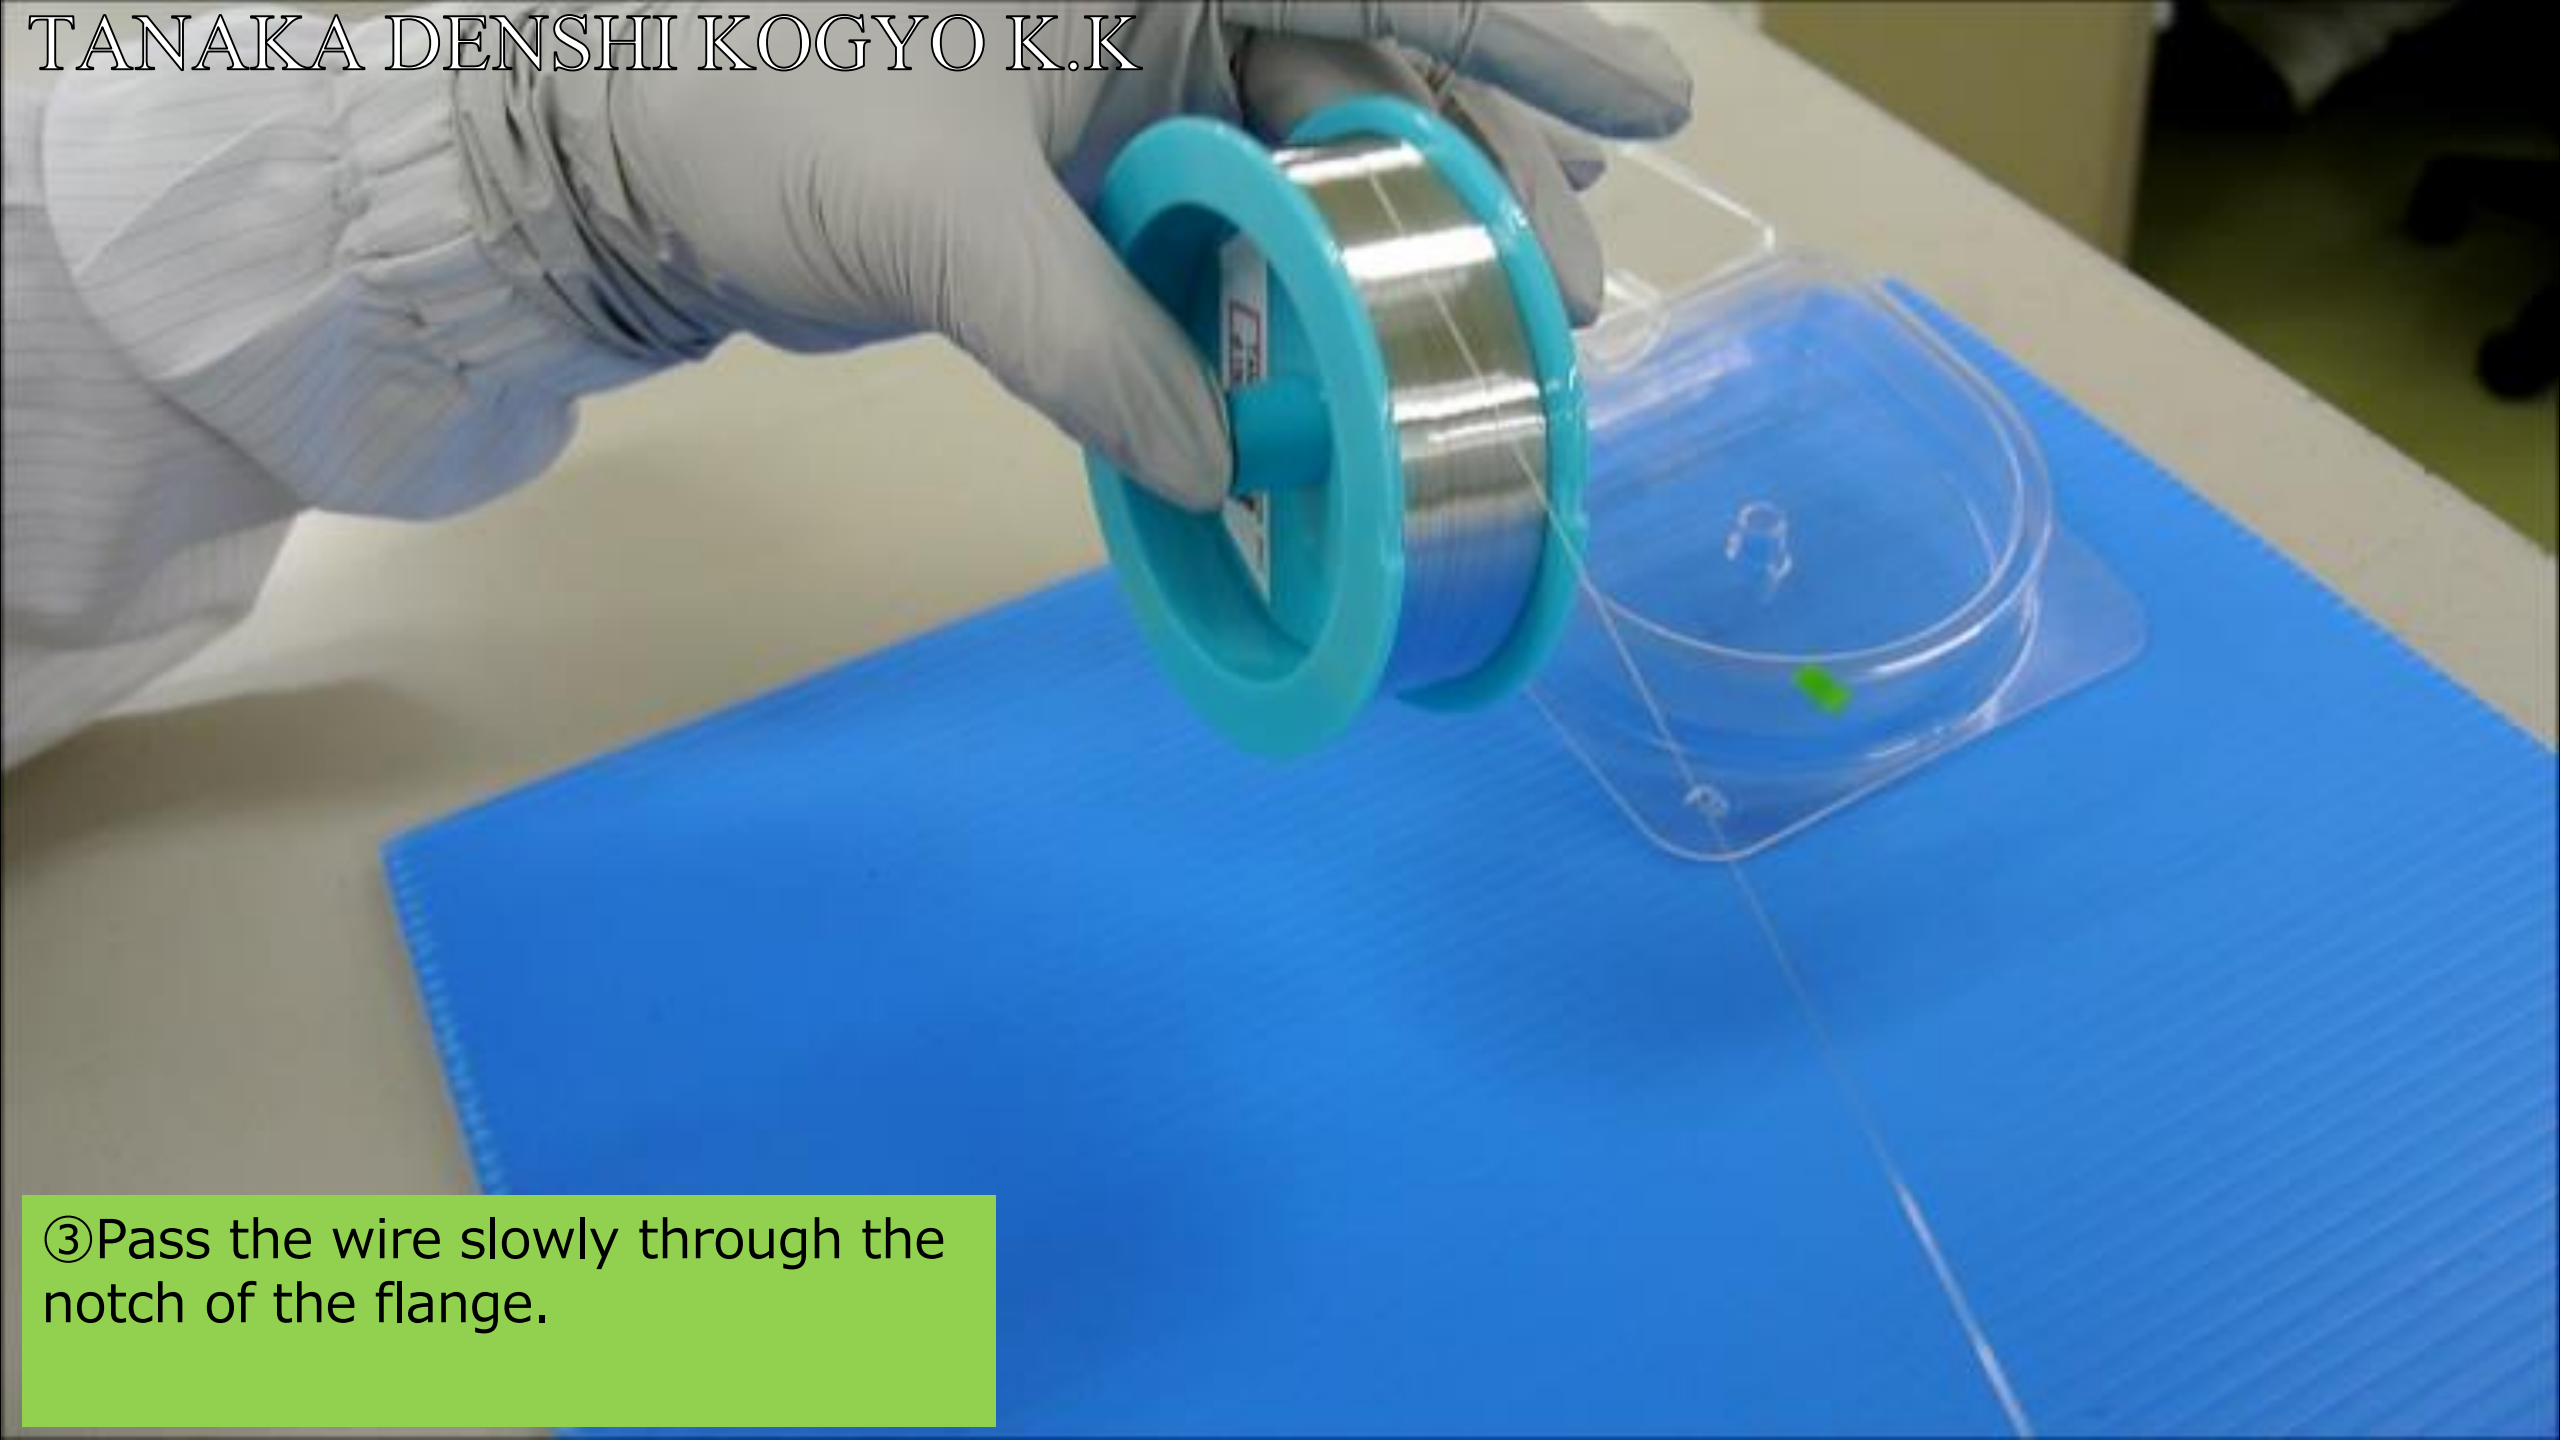


③ Pass the wire slowly through the notch of the flange.

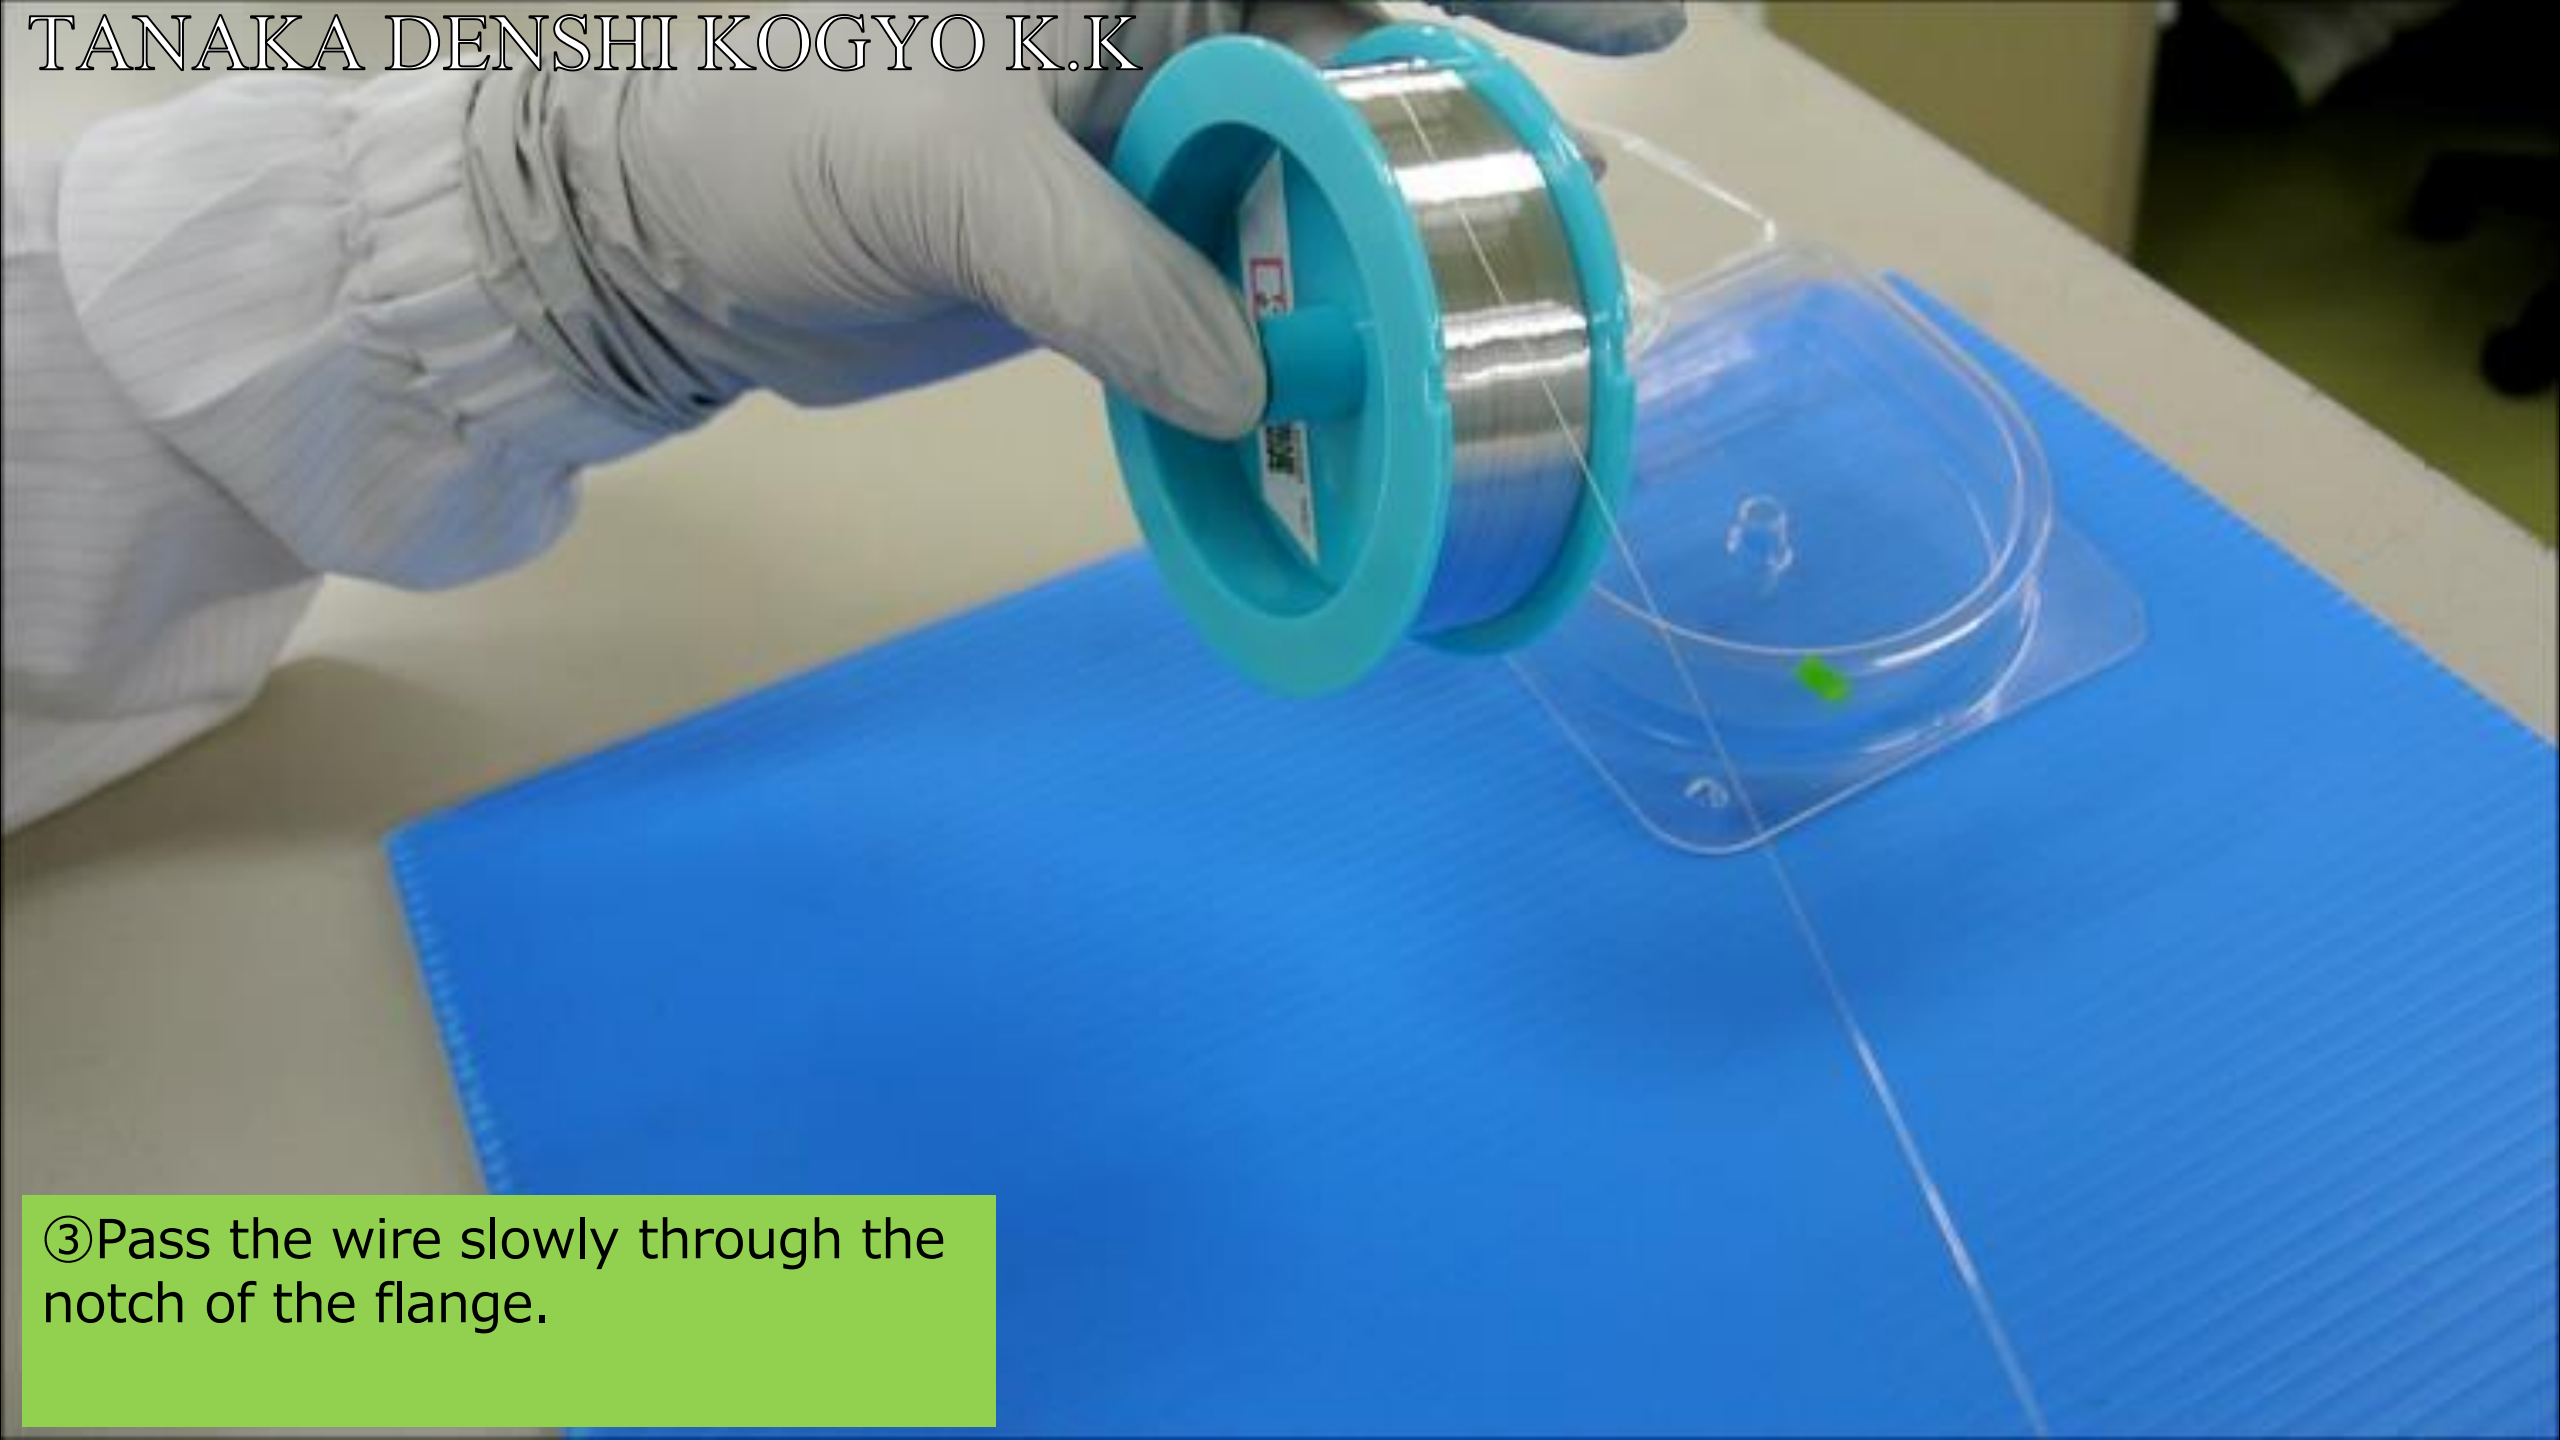


③ Pass the wire slowly through the notch of the flange.

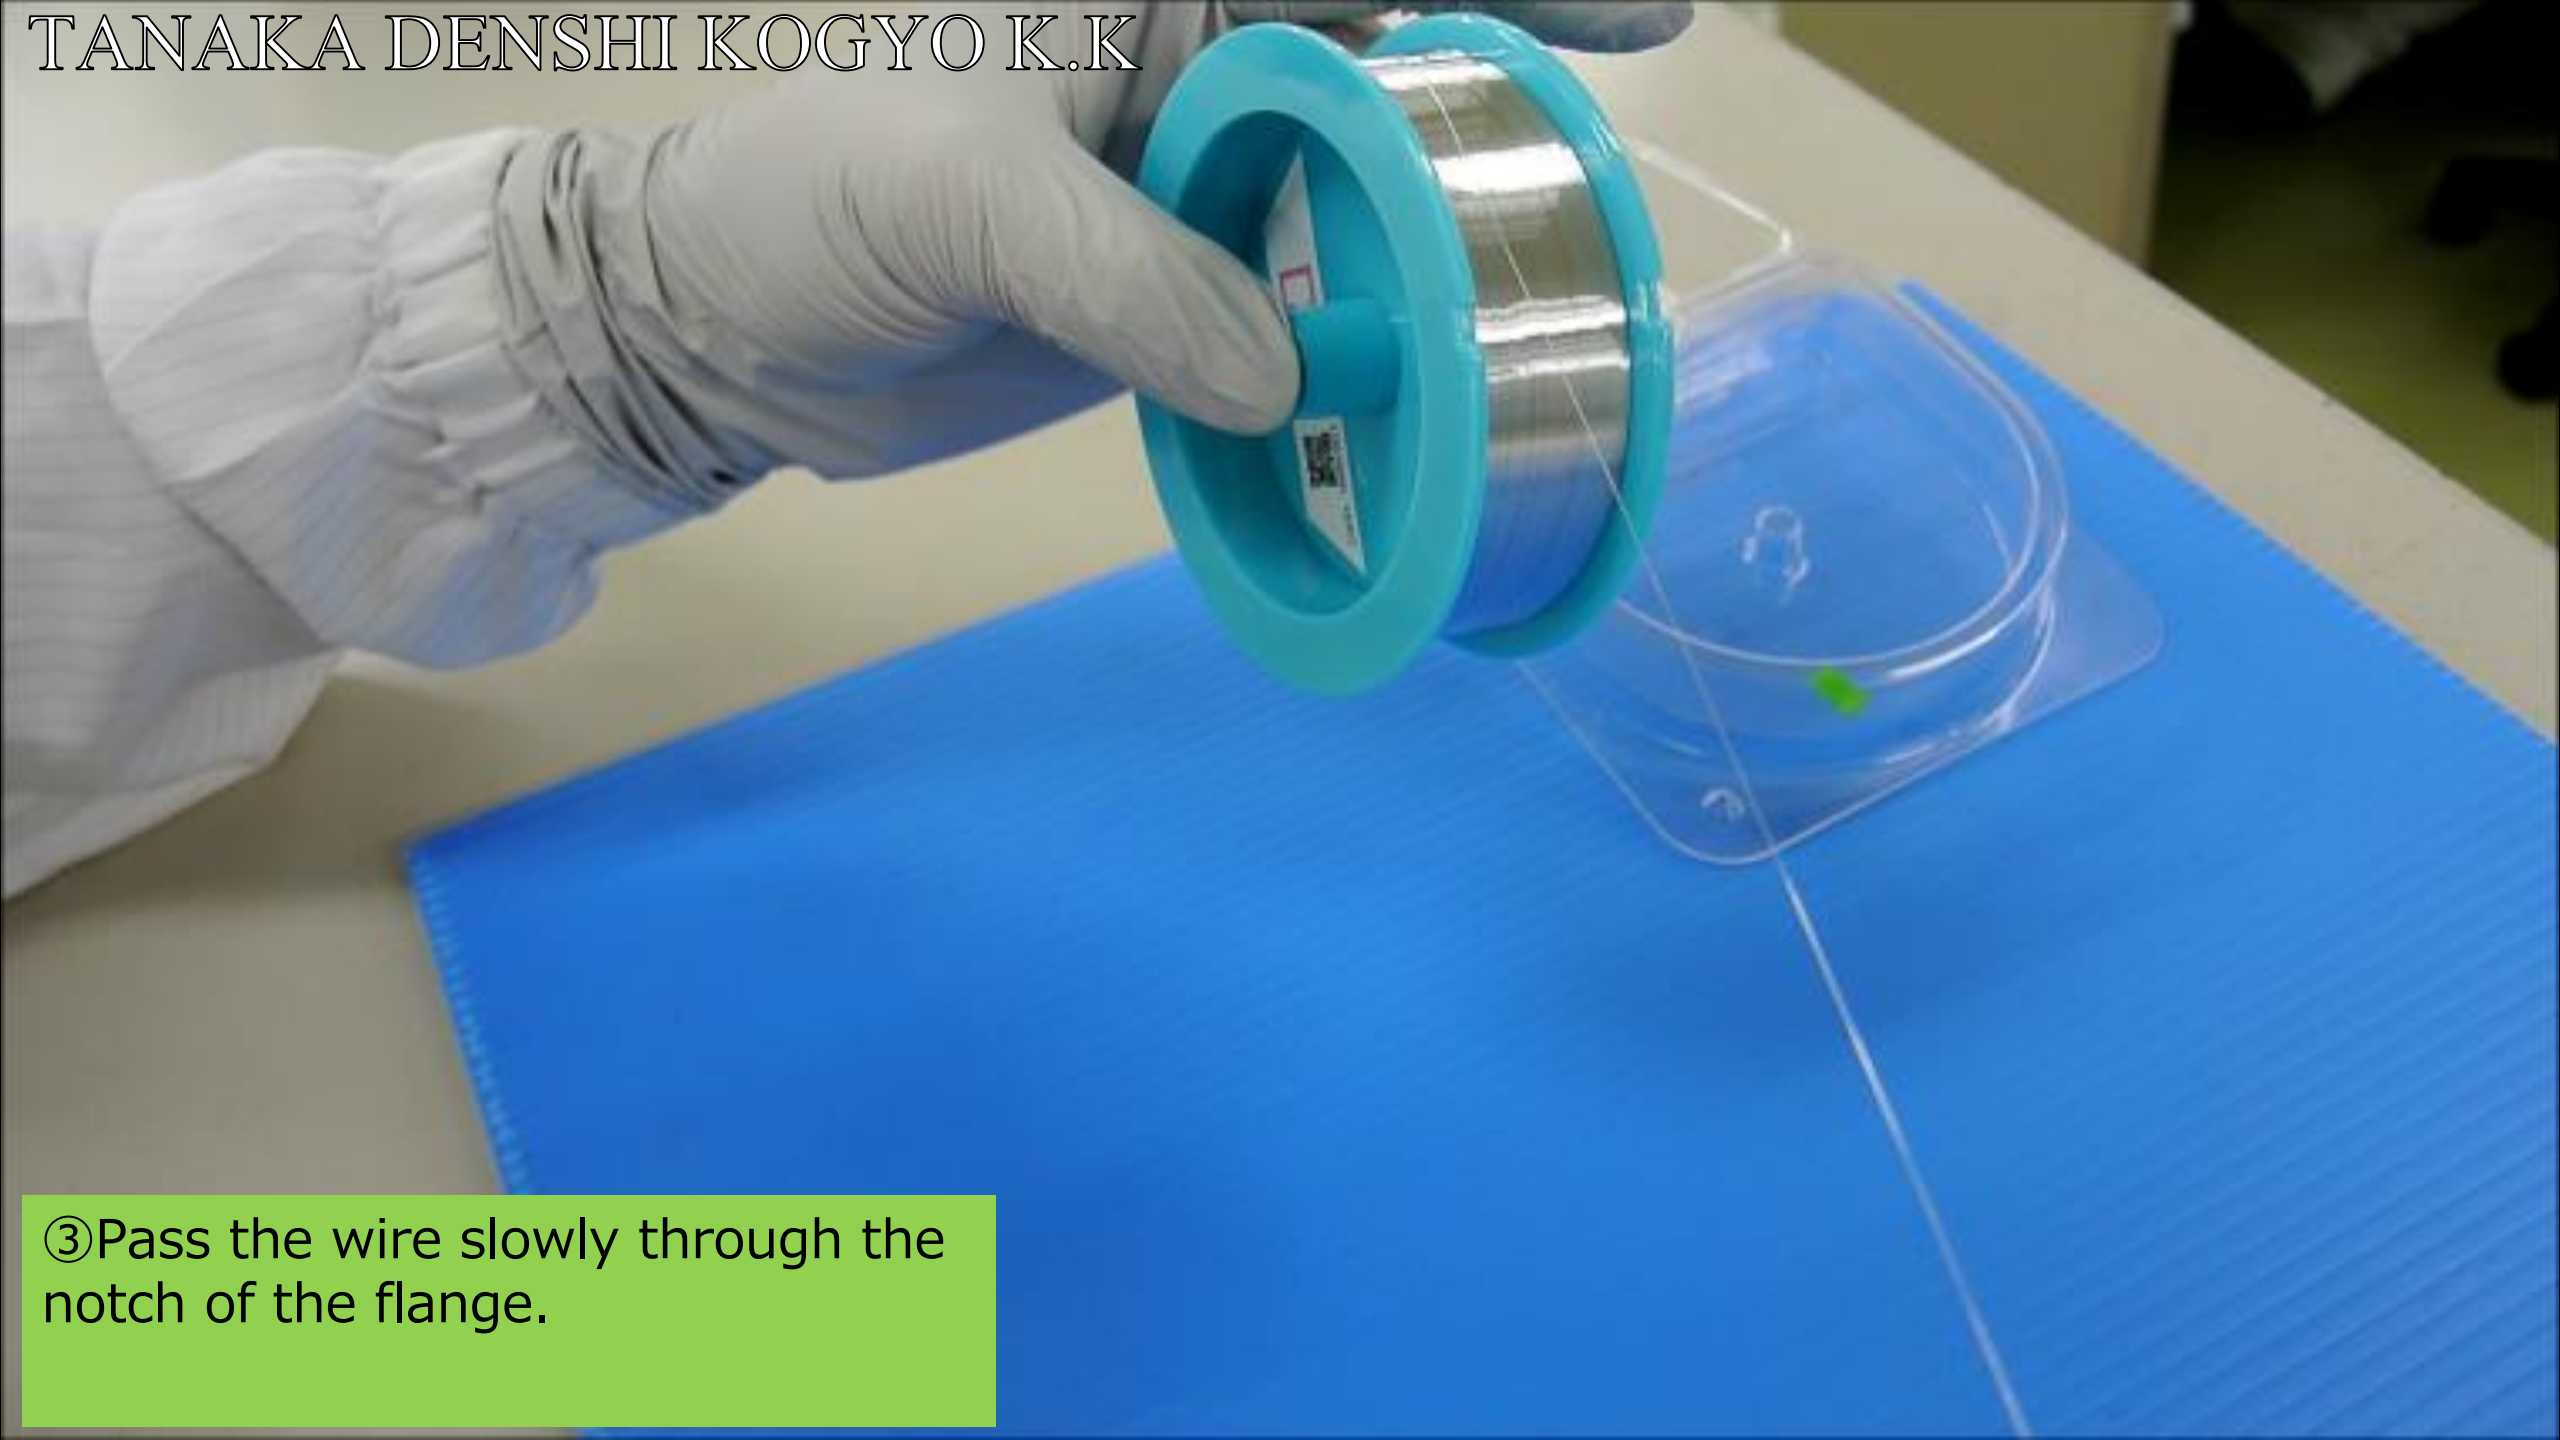


③ Pass the wire slowly through the notch of the flange.

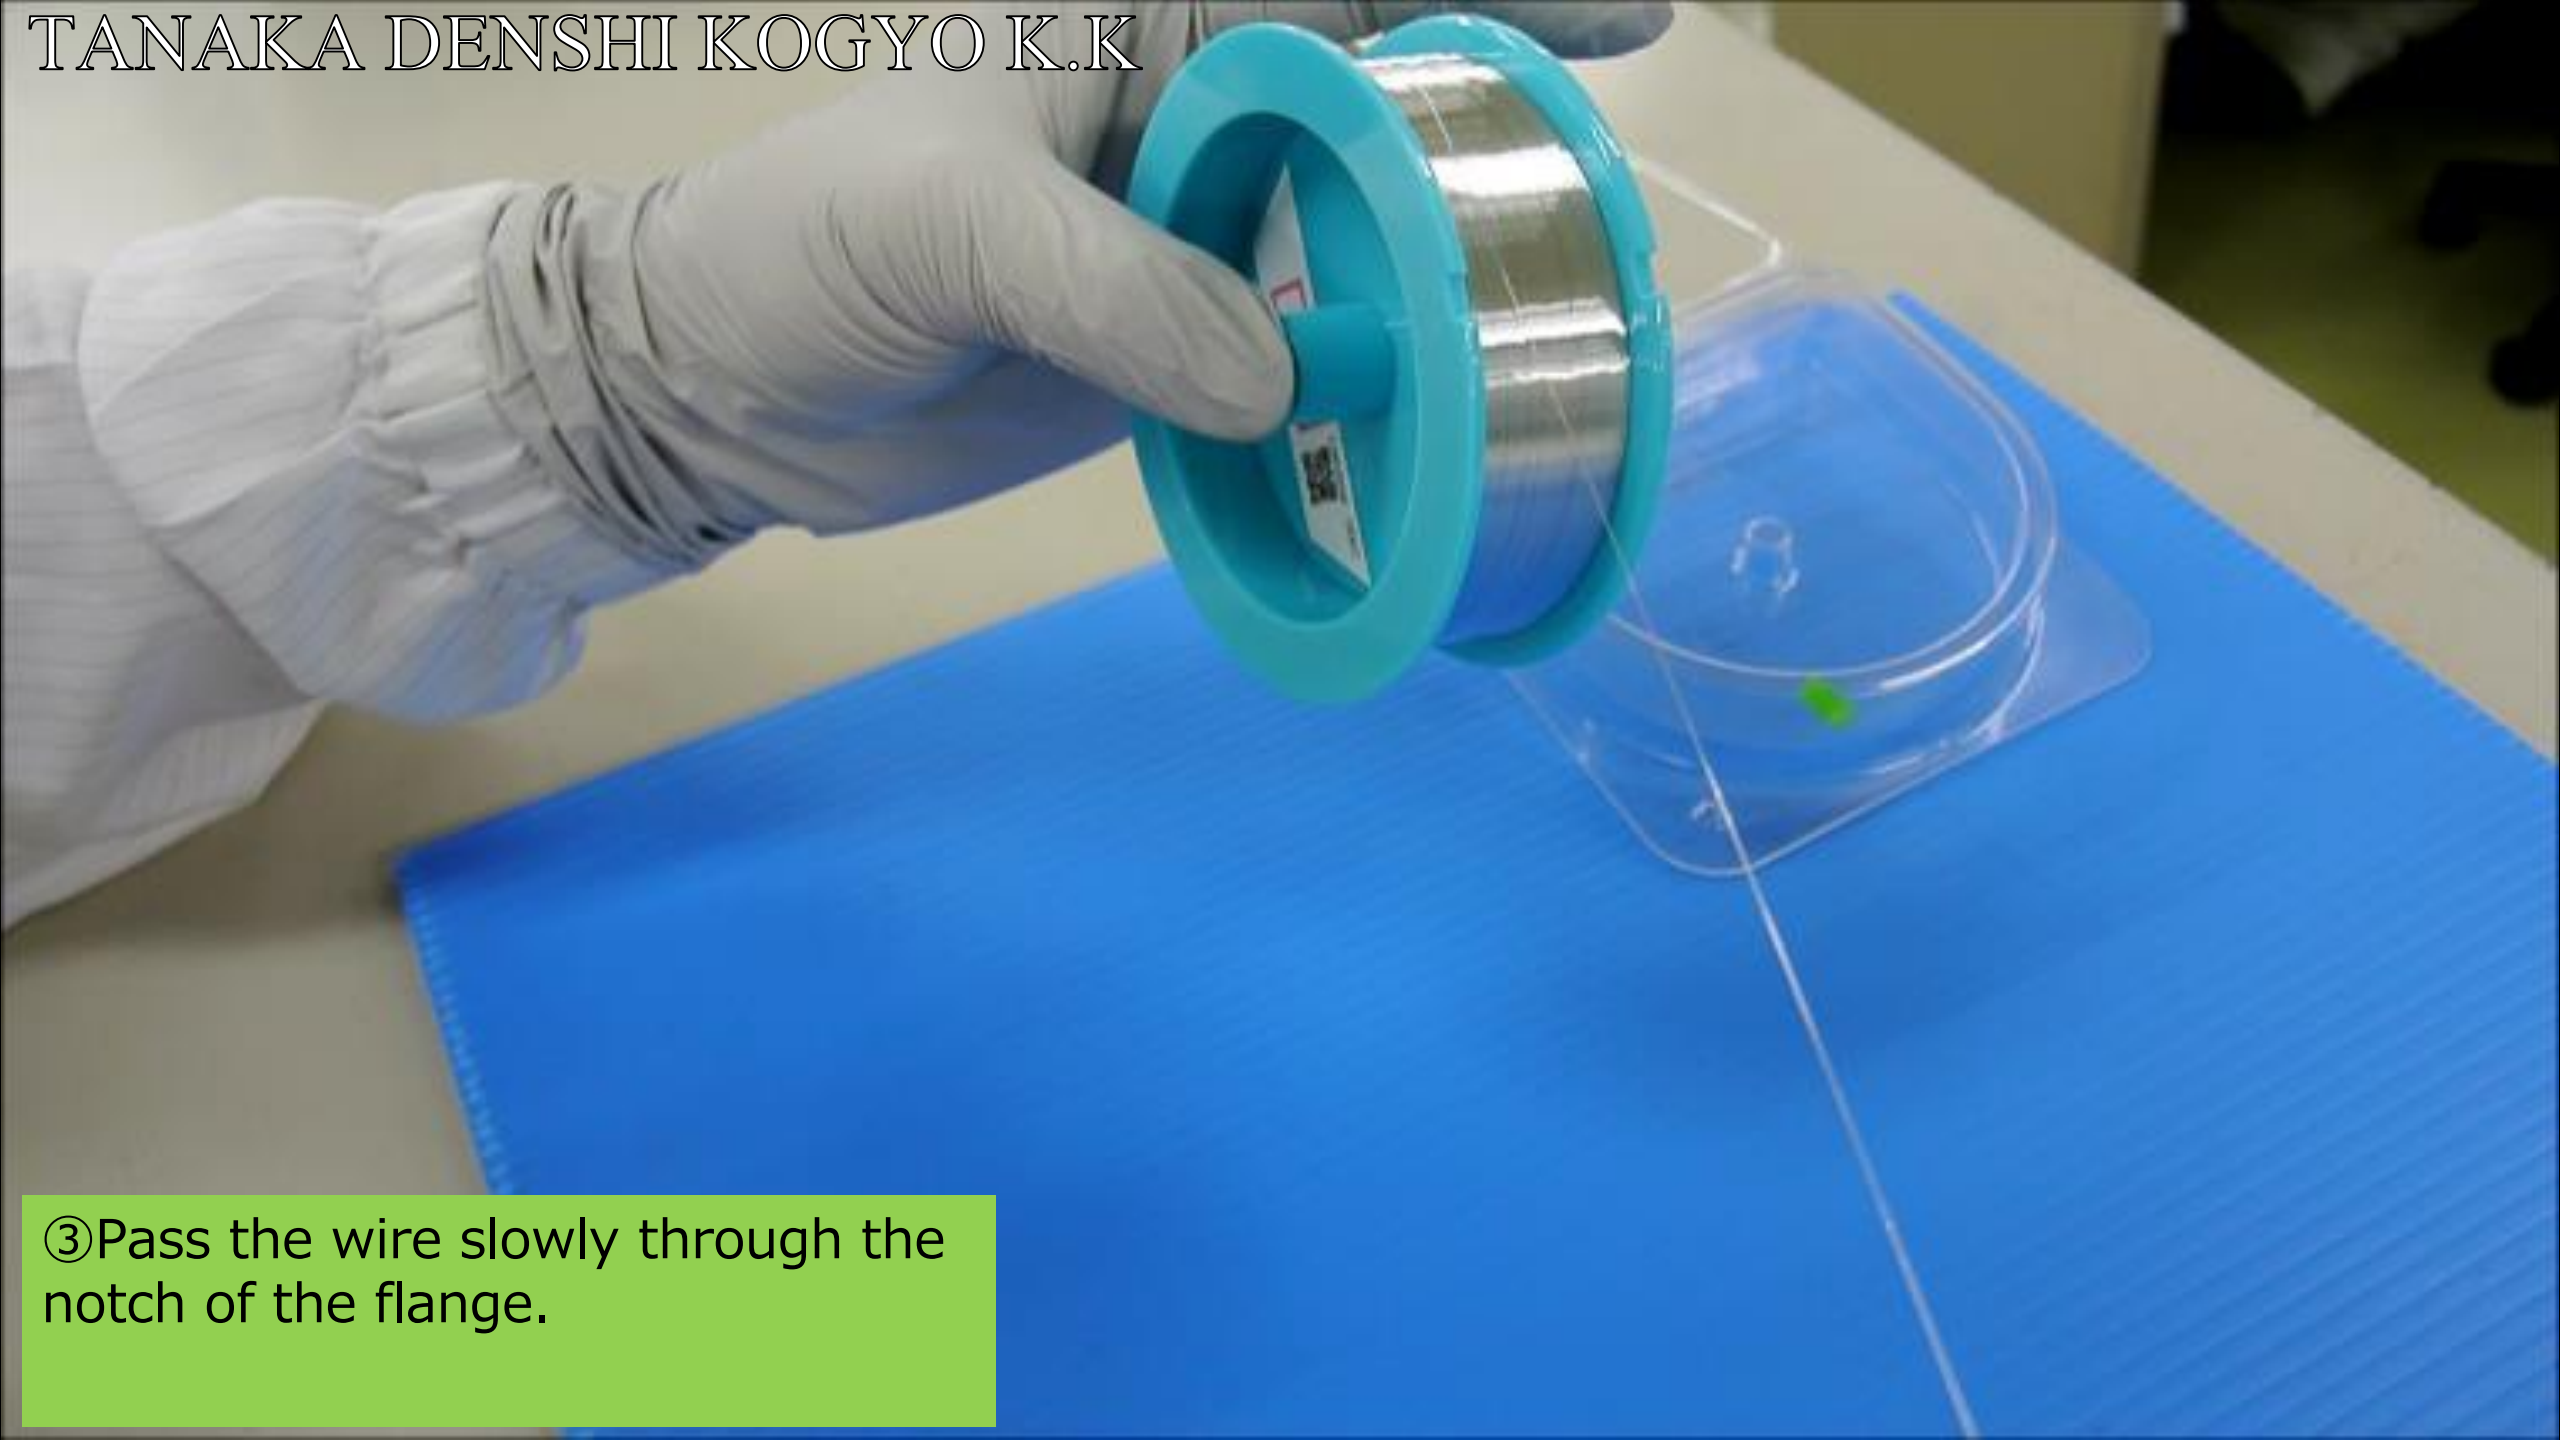

③ Pass the wire slowly through the notch of the flange.

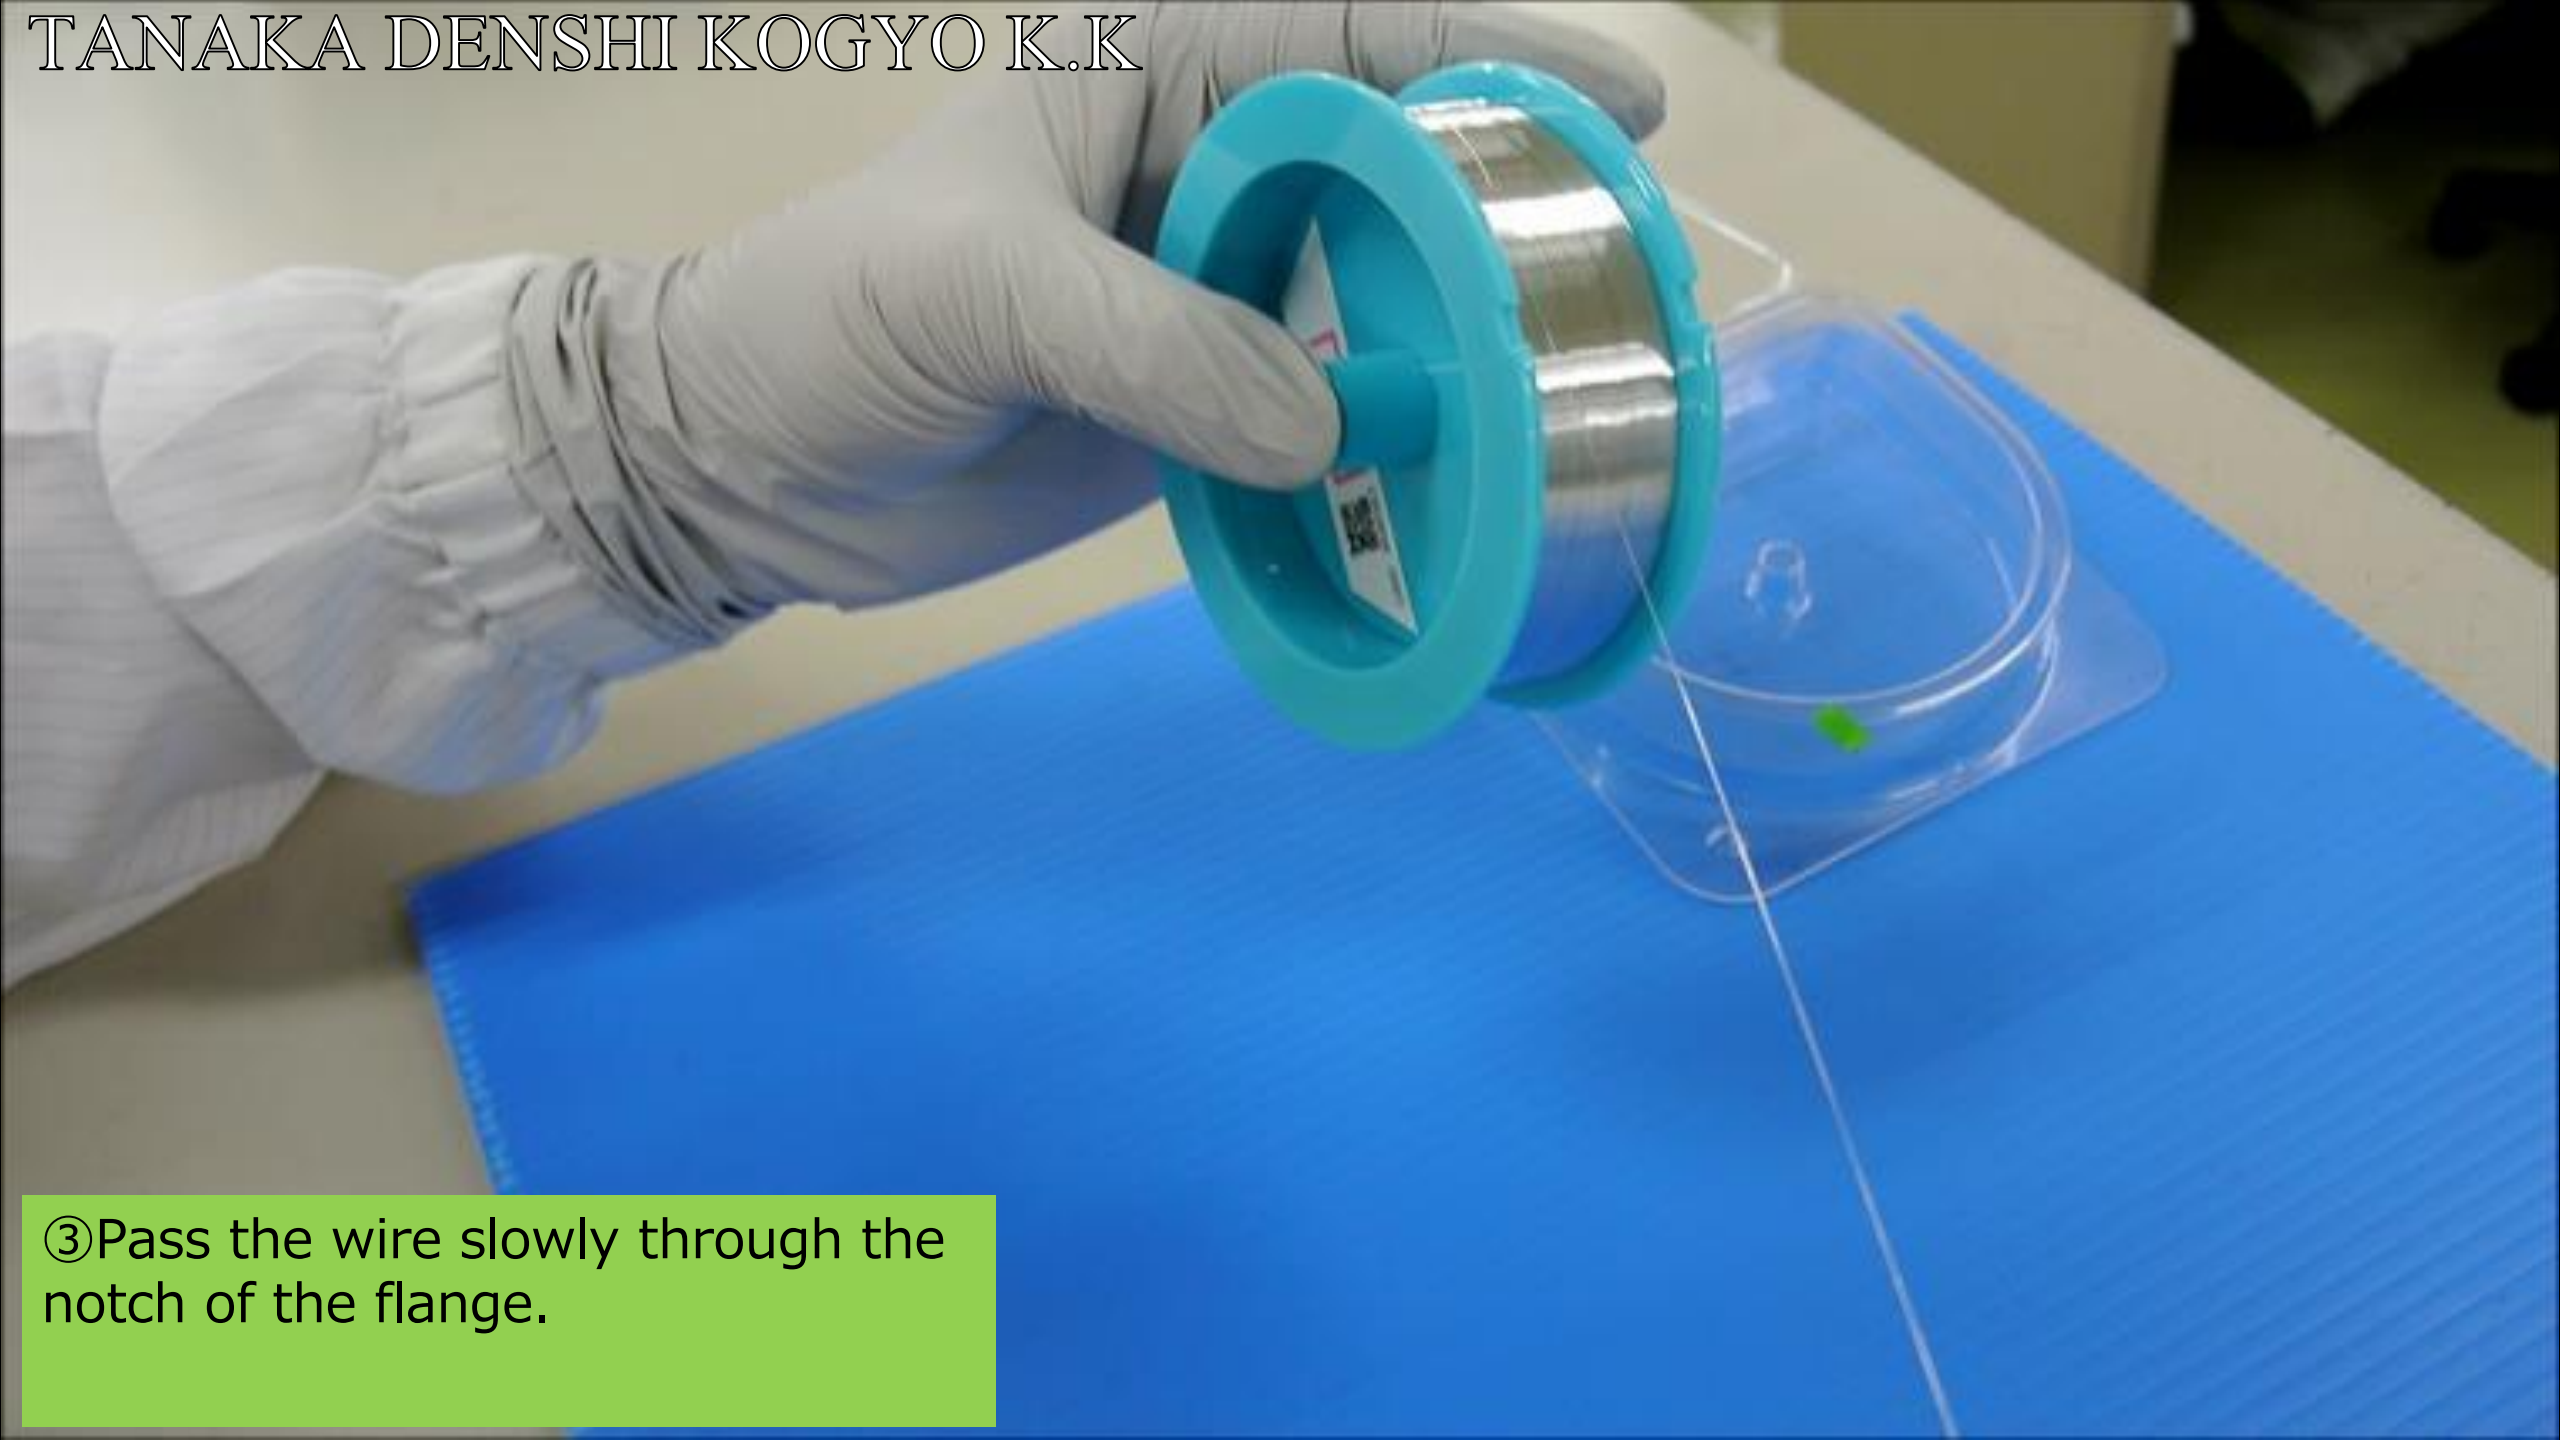

③ Pass the wire slowly through the notch of the flange.

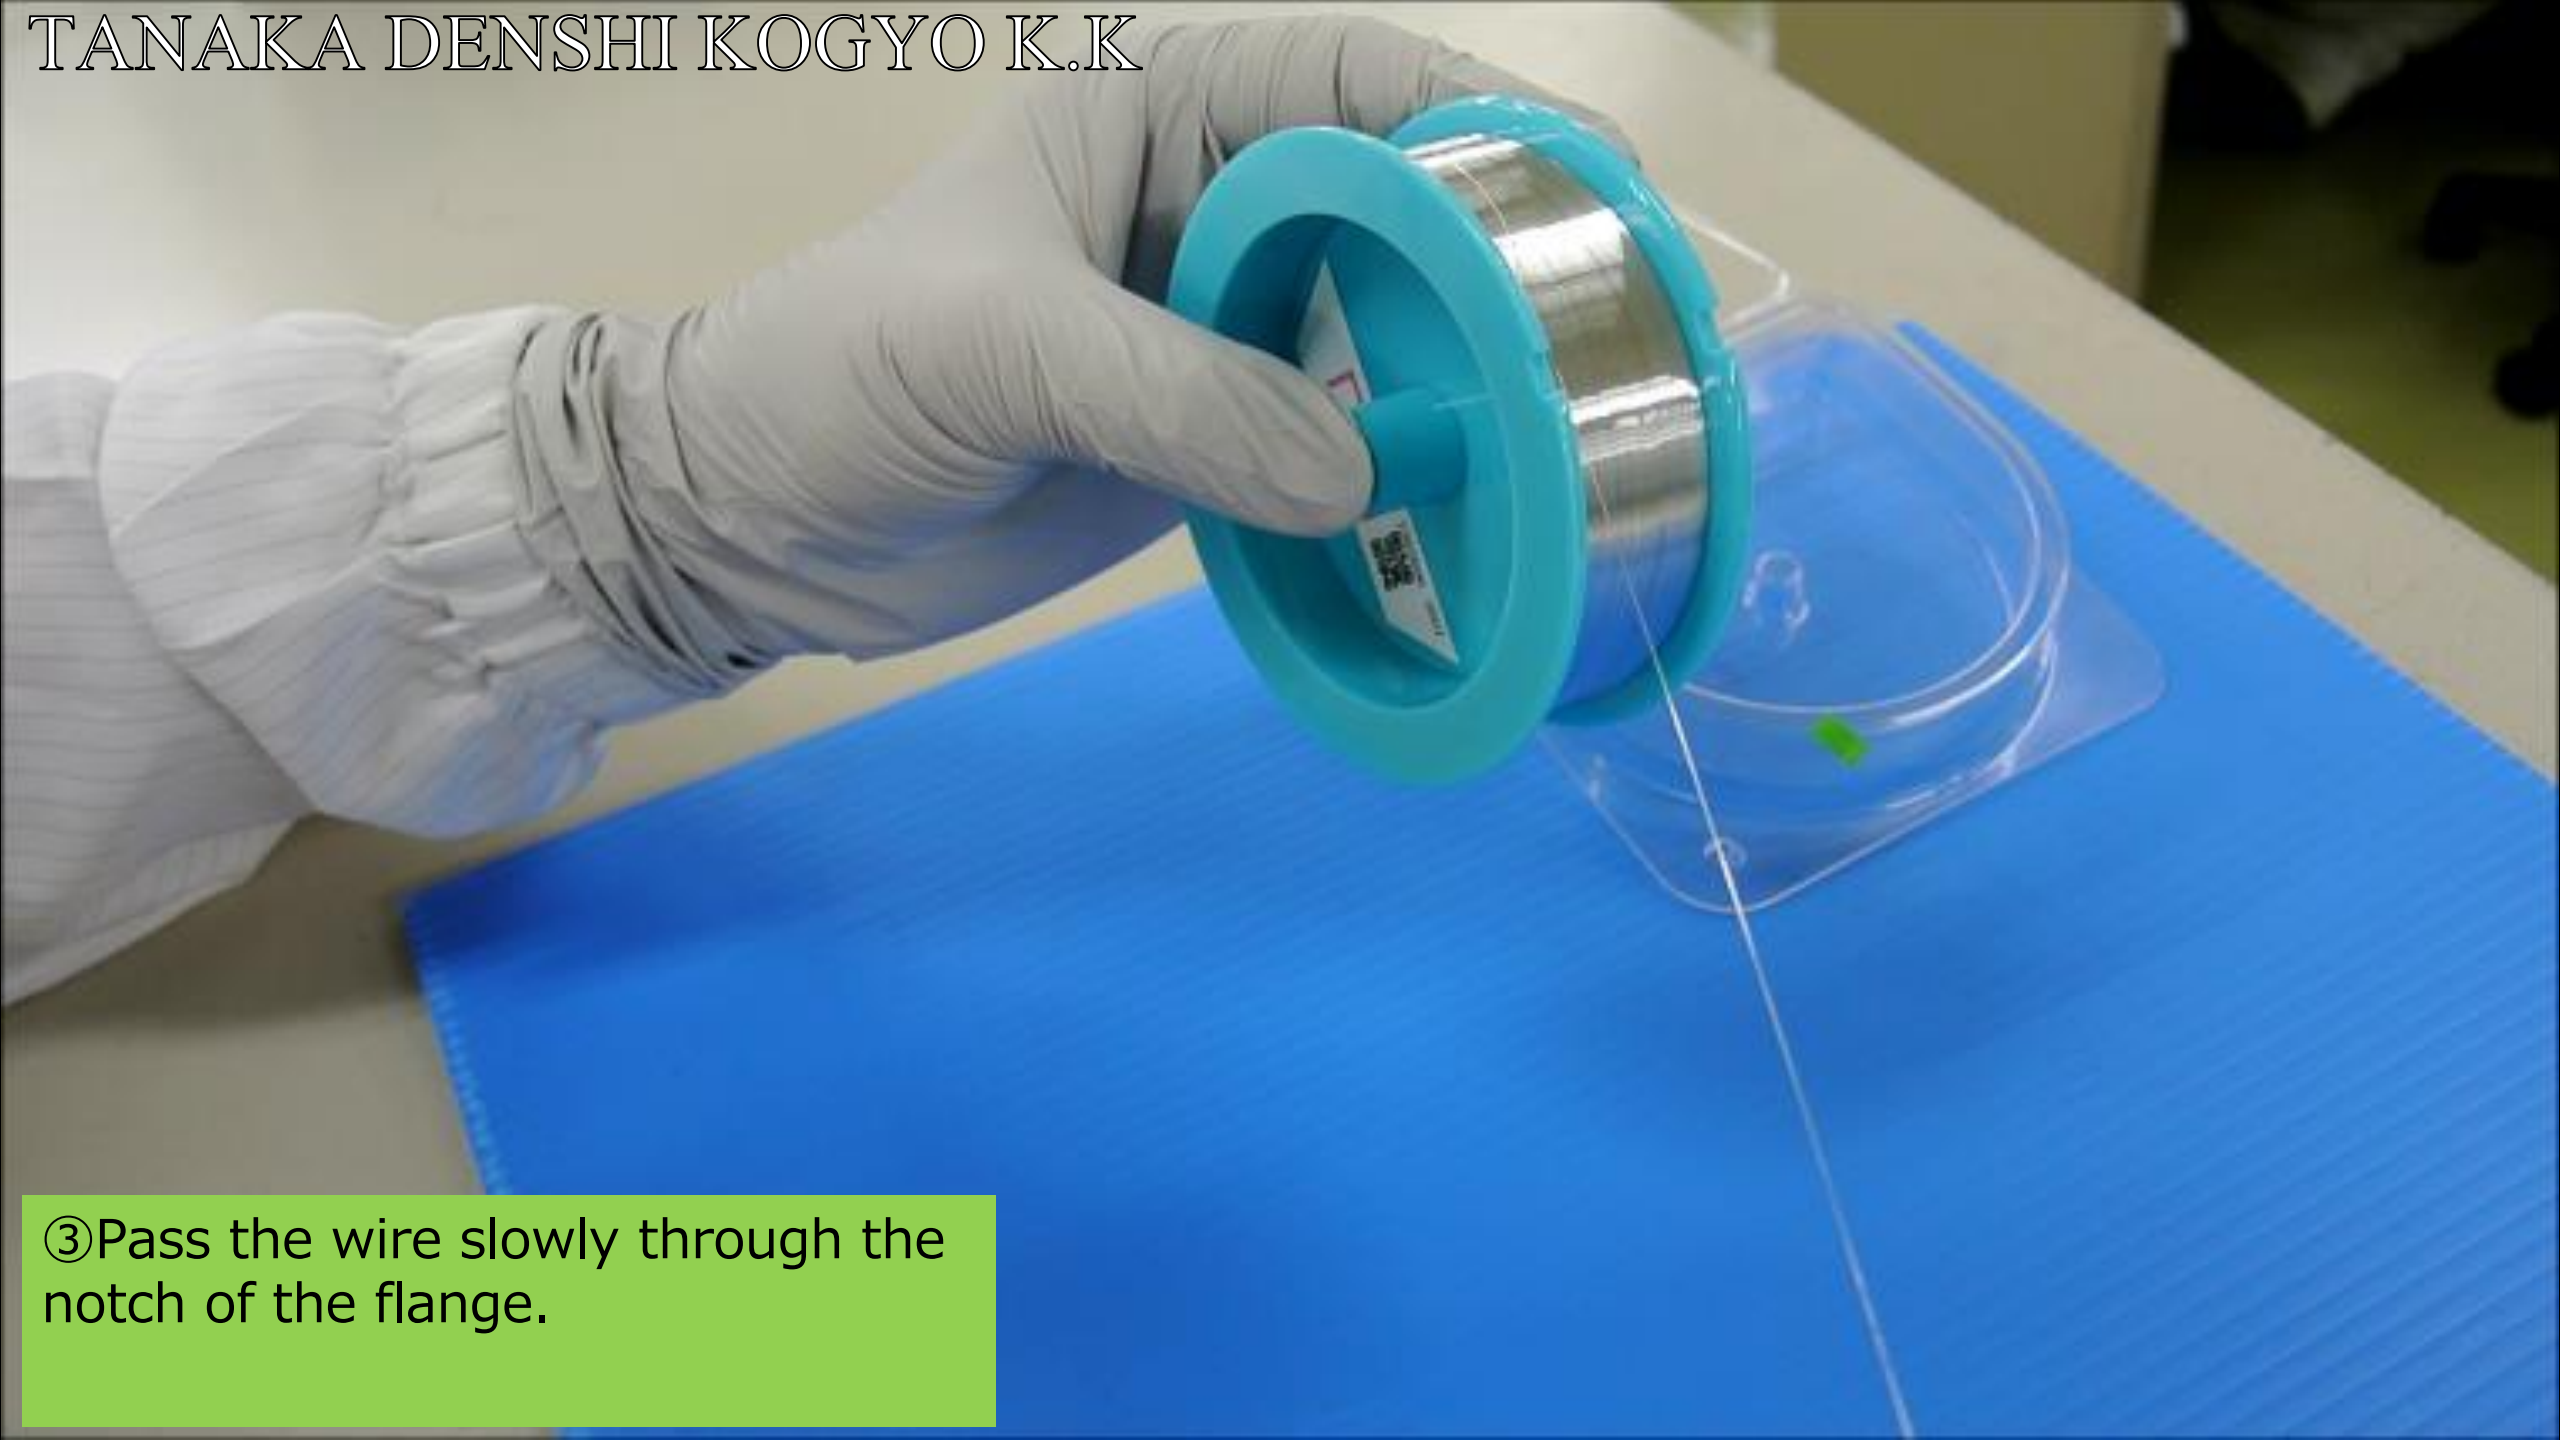

③ Pass the wire slowly through the notch of the flange.



③ Pass the wire slowly through the notch of the flange.



③ Pass the wire slowly through the notch of the flange.





③ Pass the wire slowly through the notch of the flange.



③ Pass the wire slowly through the notch of the flange.




③ Pass the wire slowly through the notch of the flange.




④ Bring the wire through the notch to the center and hold it with your finger.



④ Bring the wire through the notch to the center and hold it with your finger.

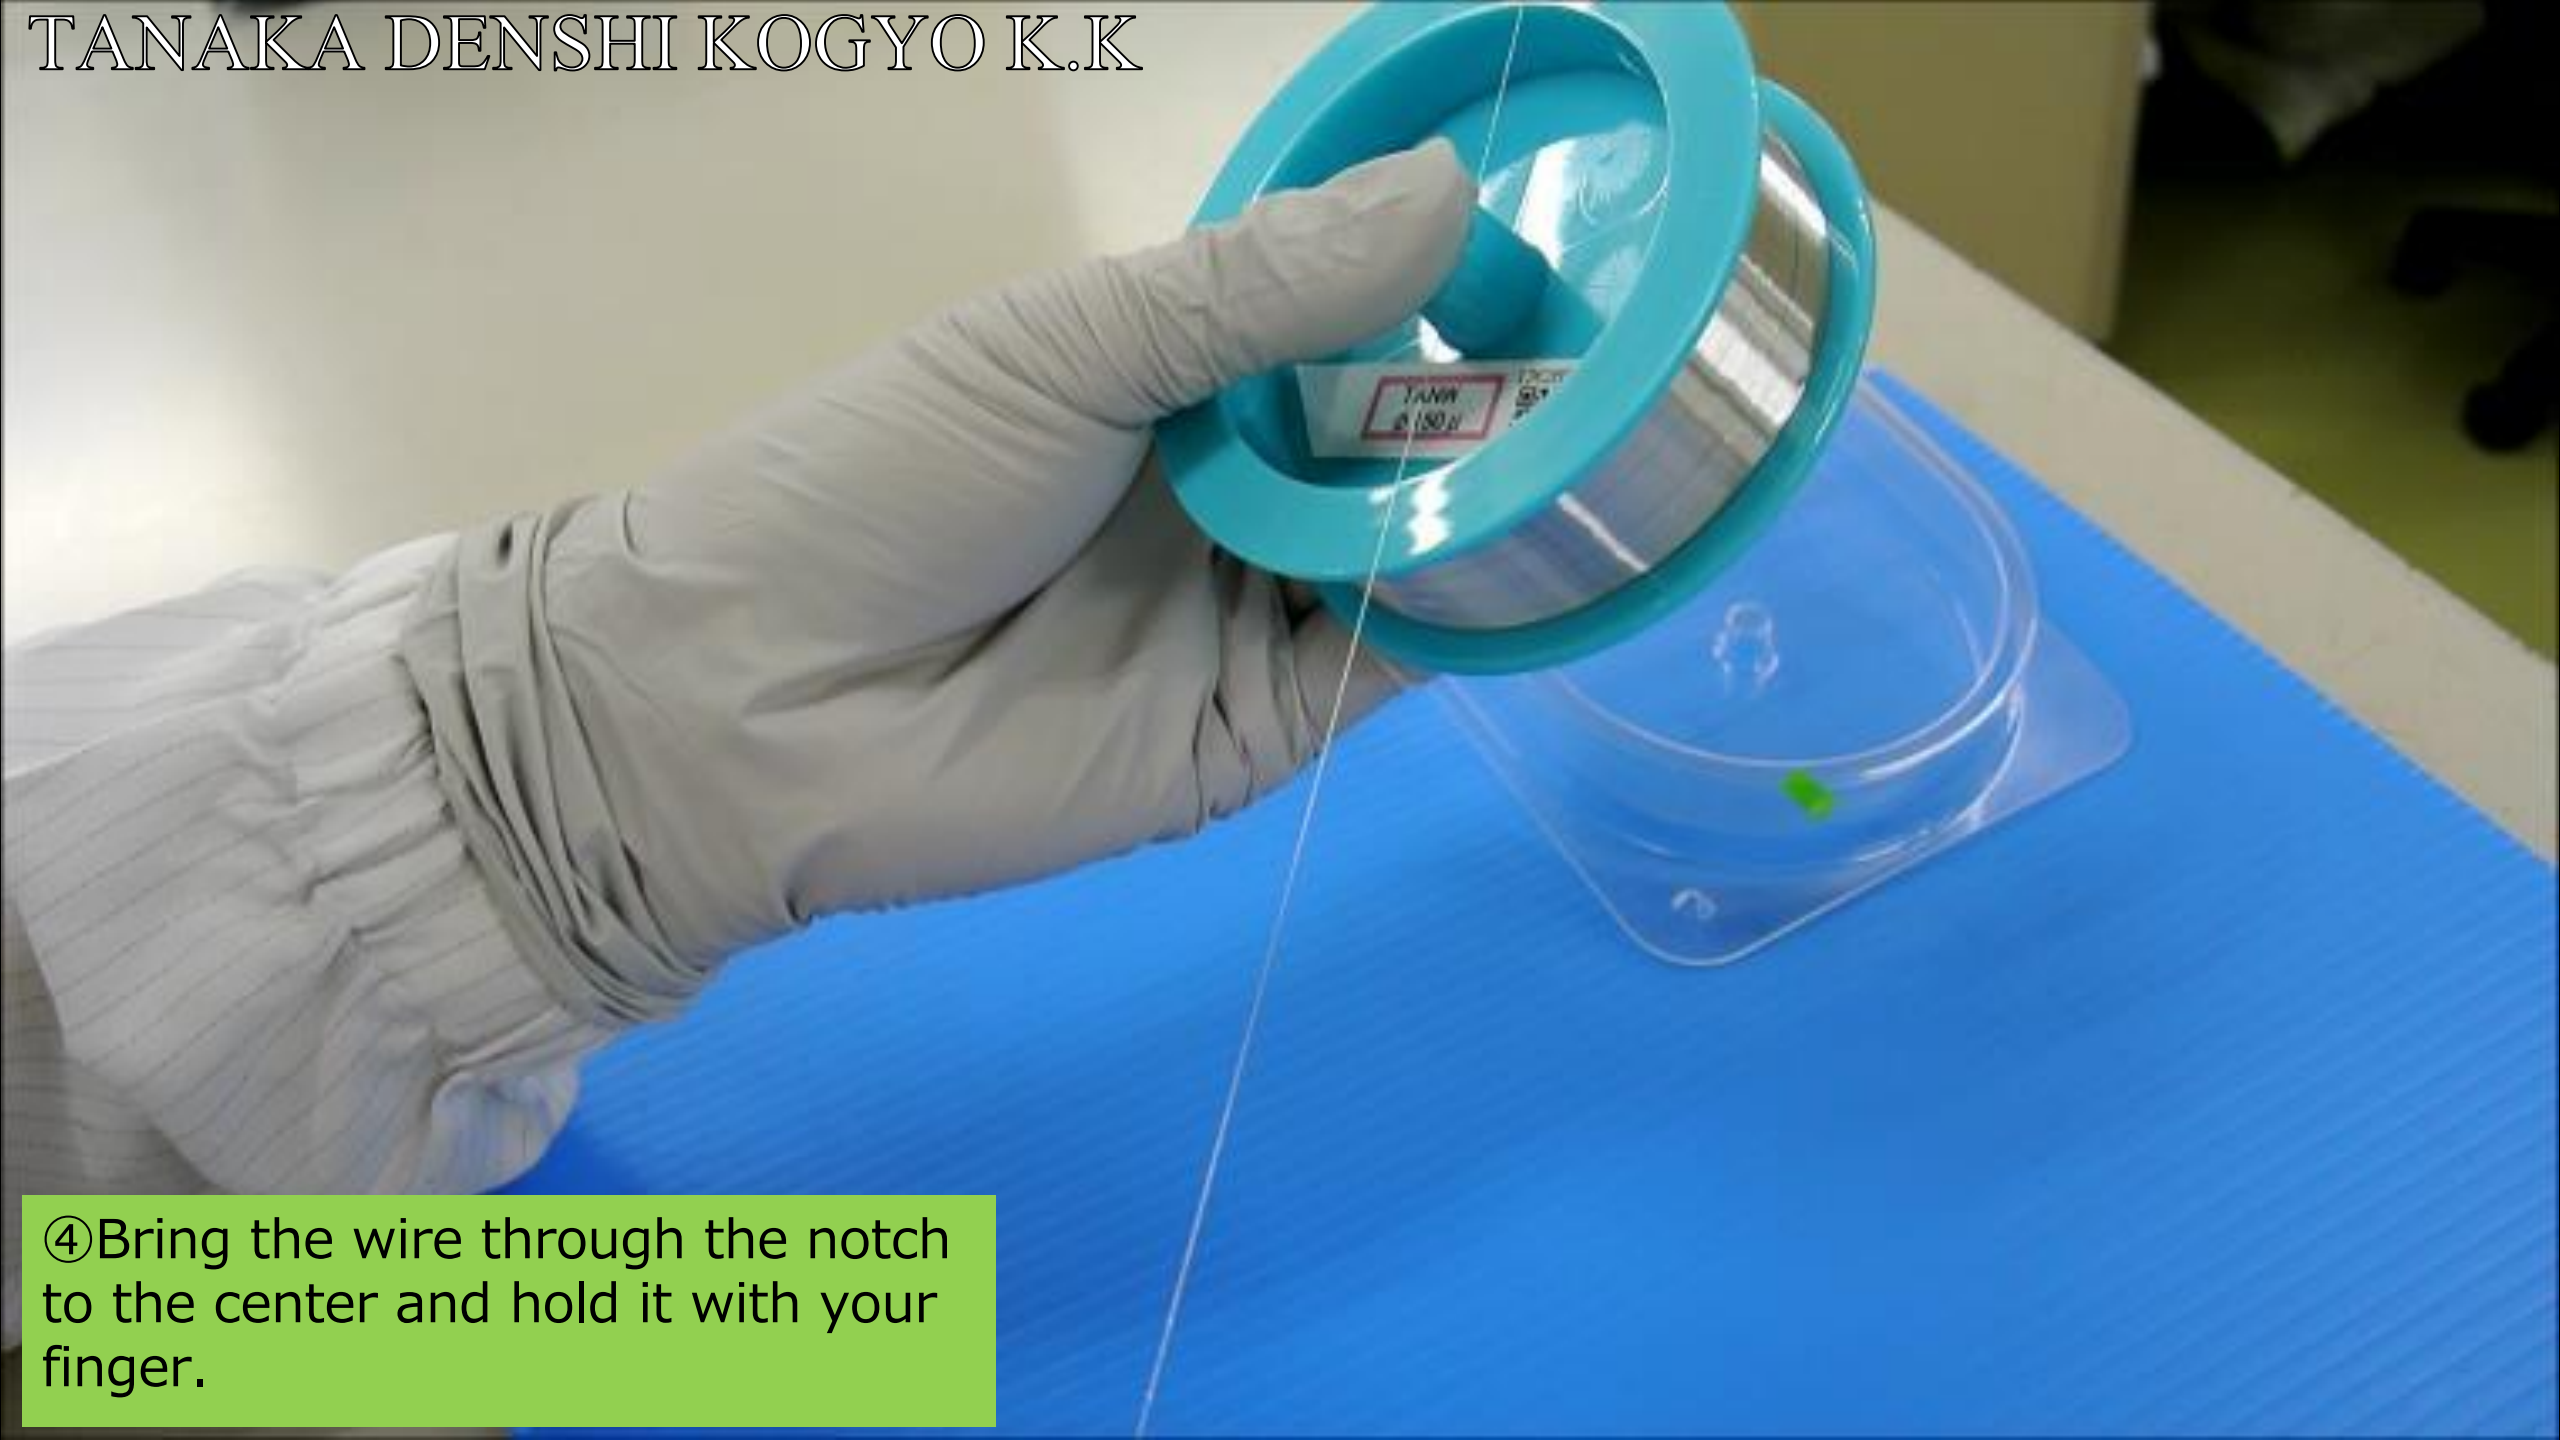

④ Bring the wire through the notch to the center and hold it with your finger.

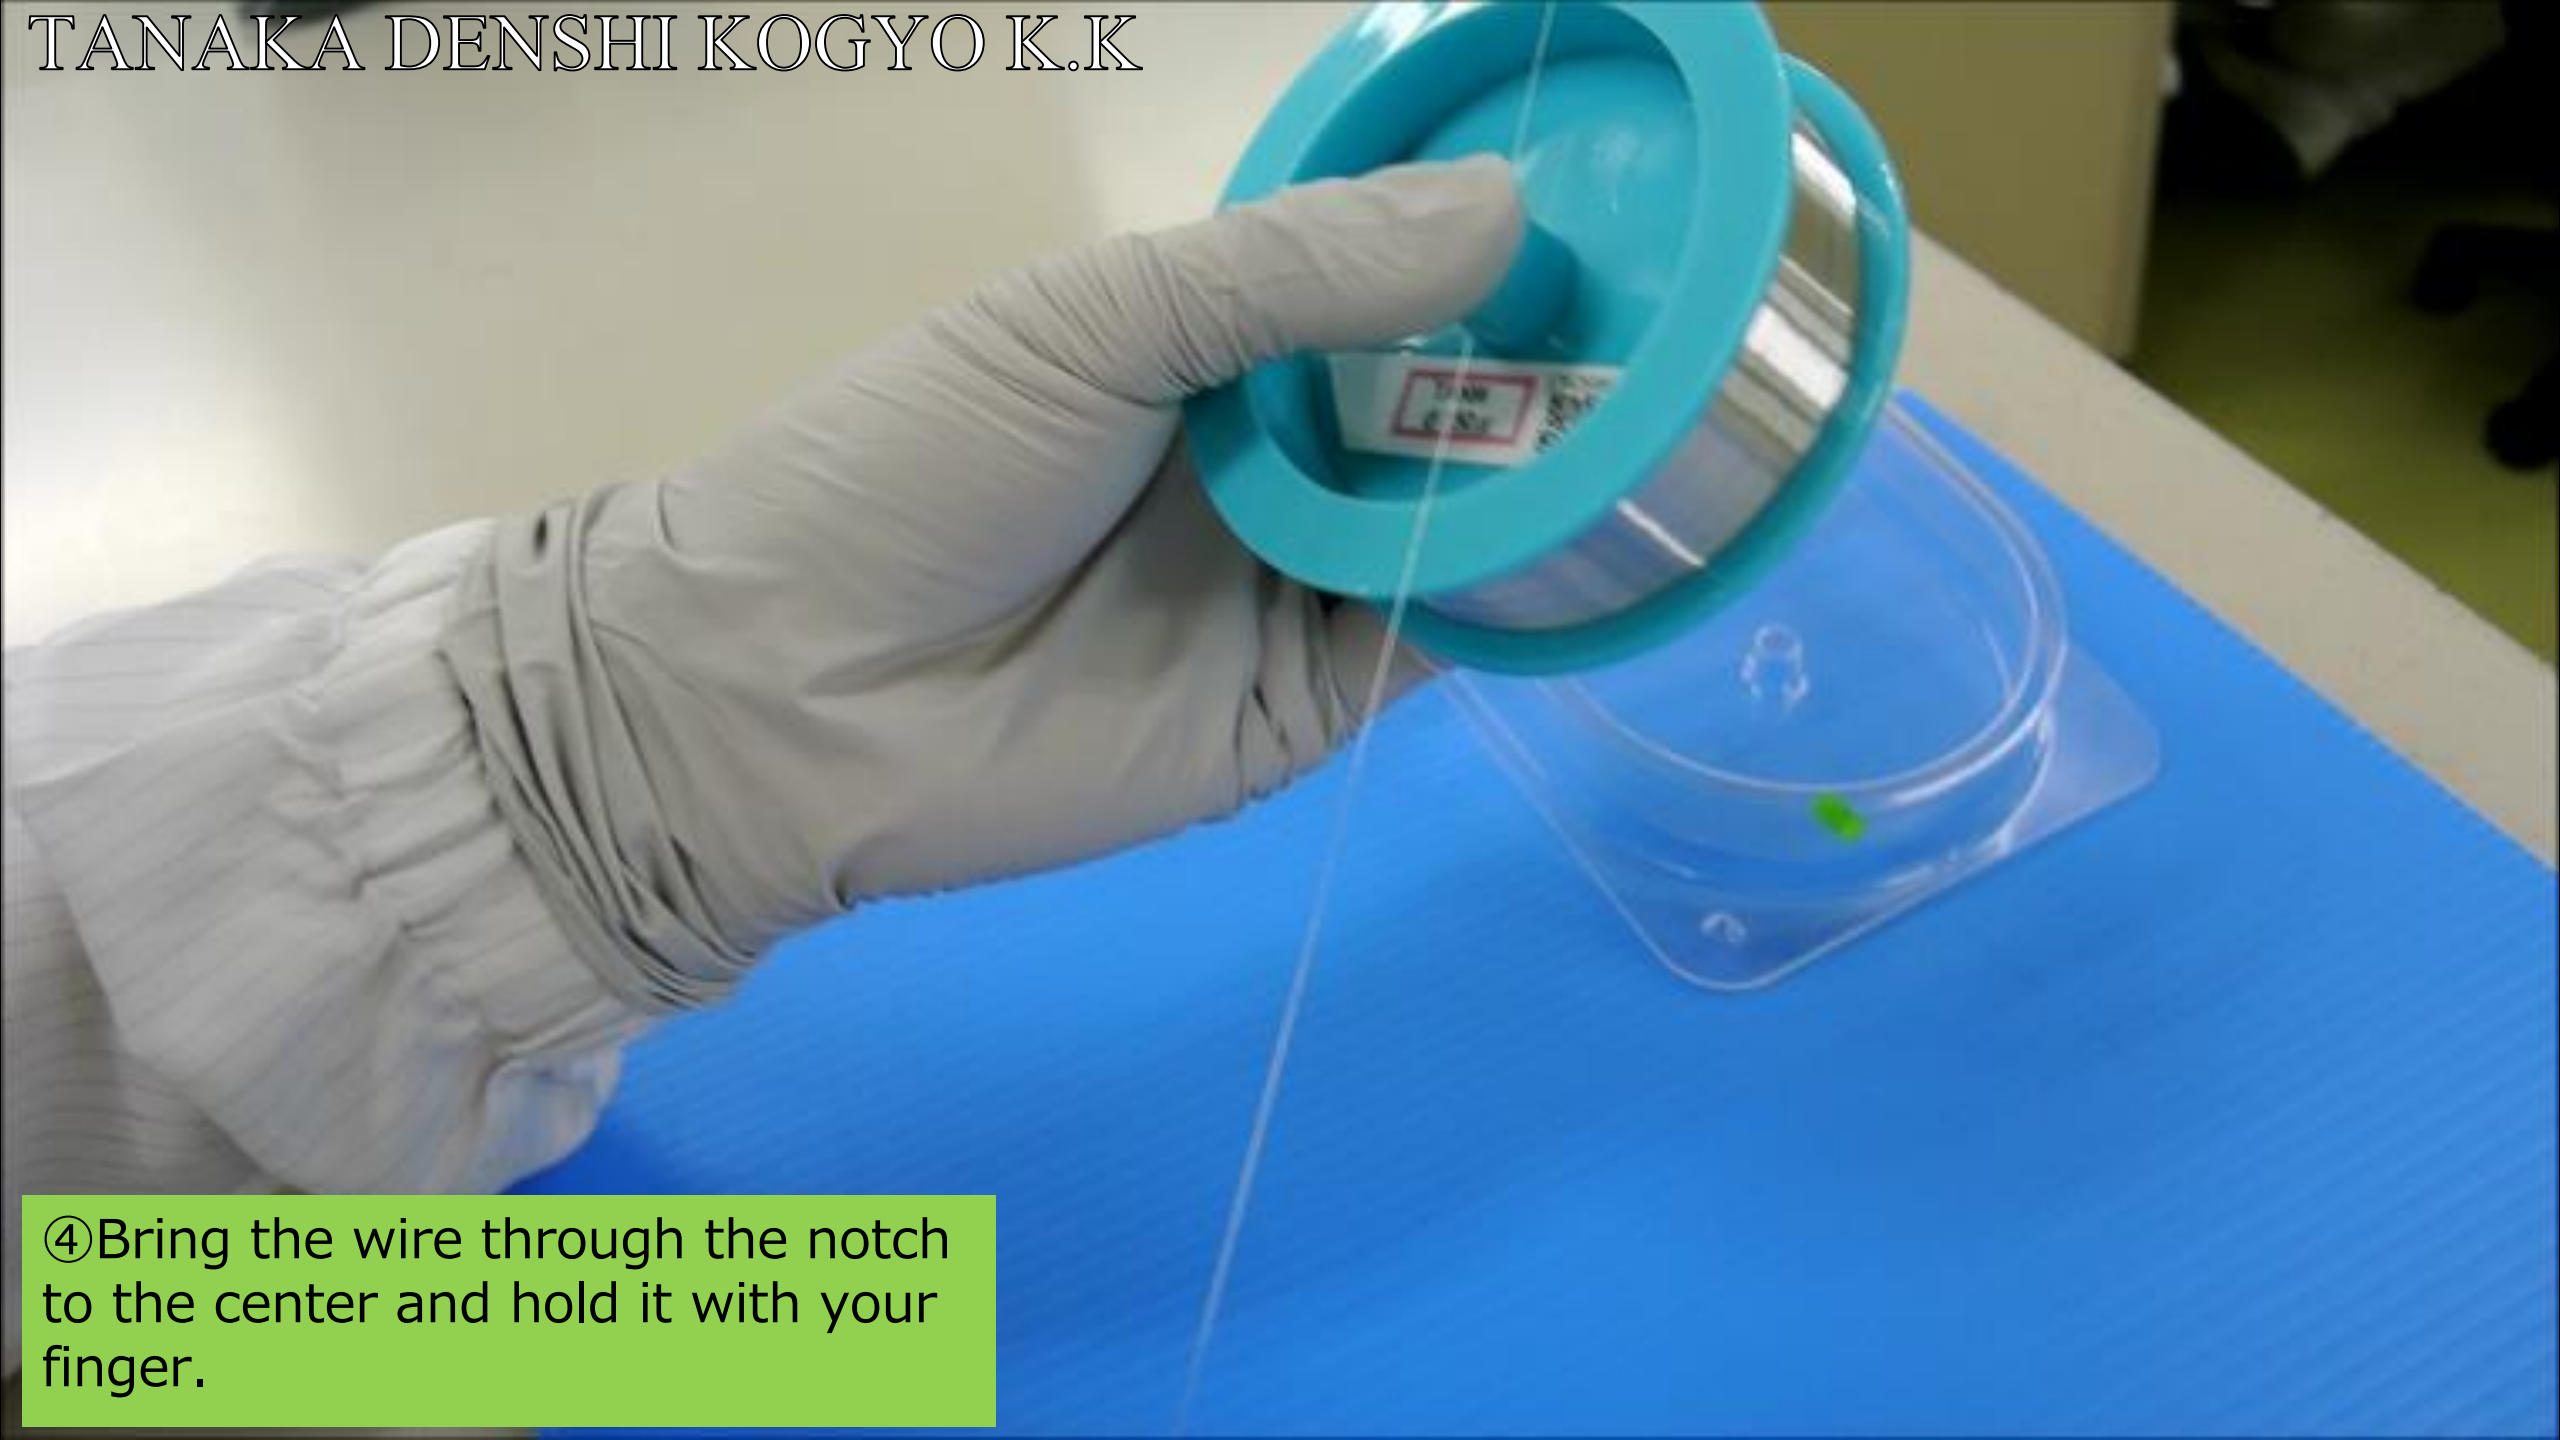

④ Bring the wire through the notch to the center and hold it with your finger.



④ Bring the wire through the notch to the center and hold it with your finger.







④ Bring the wire through the notch to the center and hold it with your finger.



④ Bring the wire through the notch to the center and hold it with your finger.

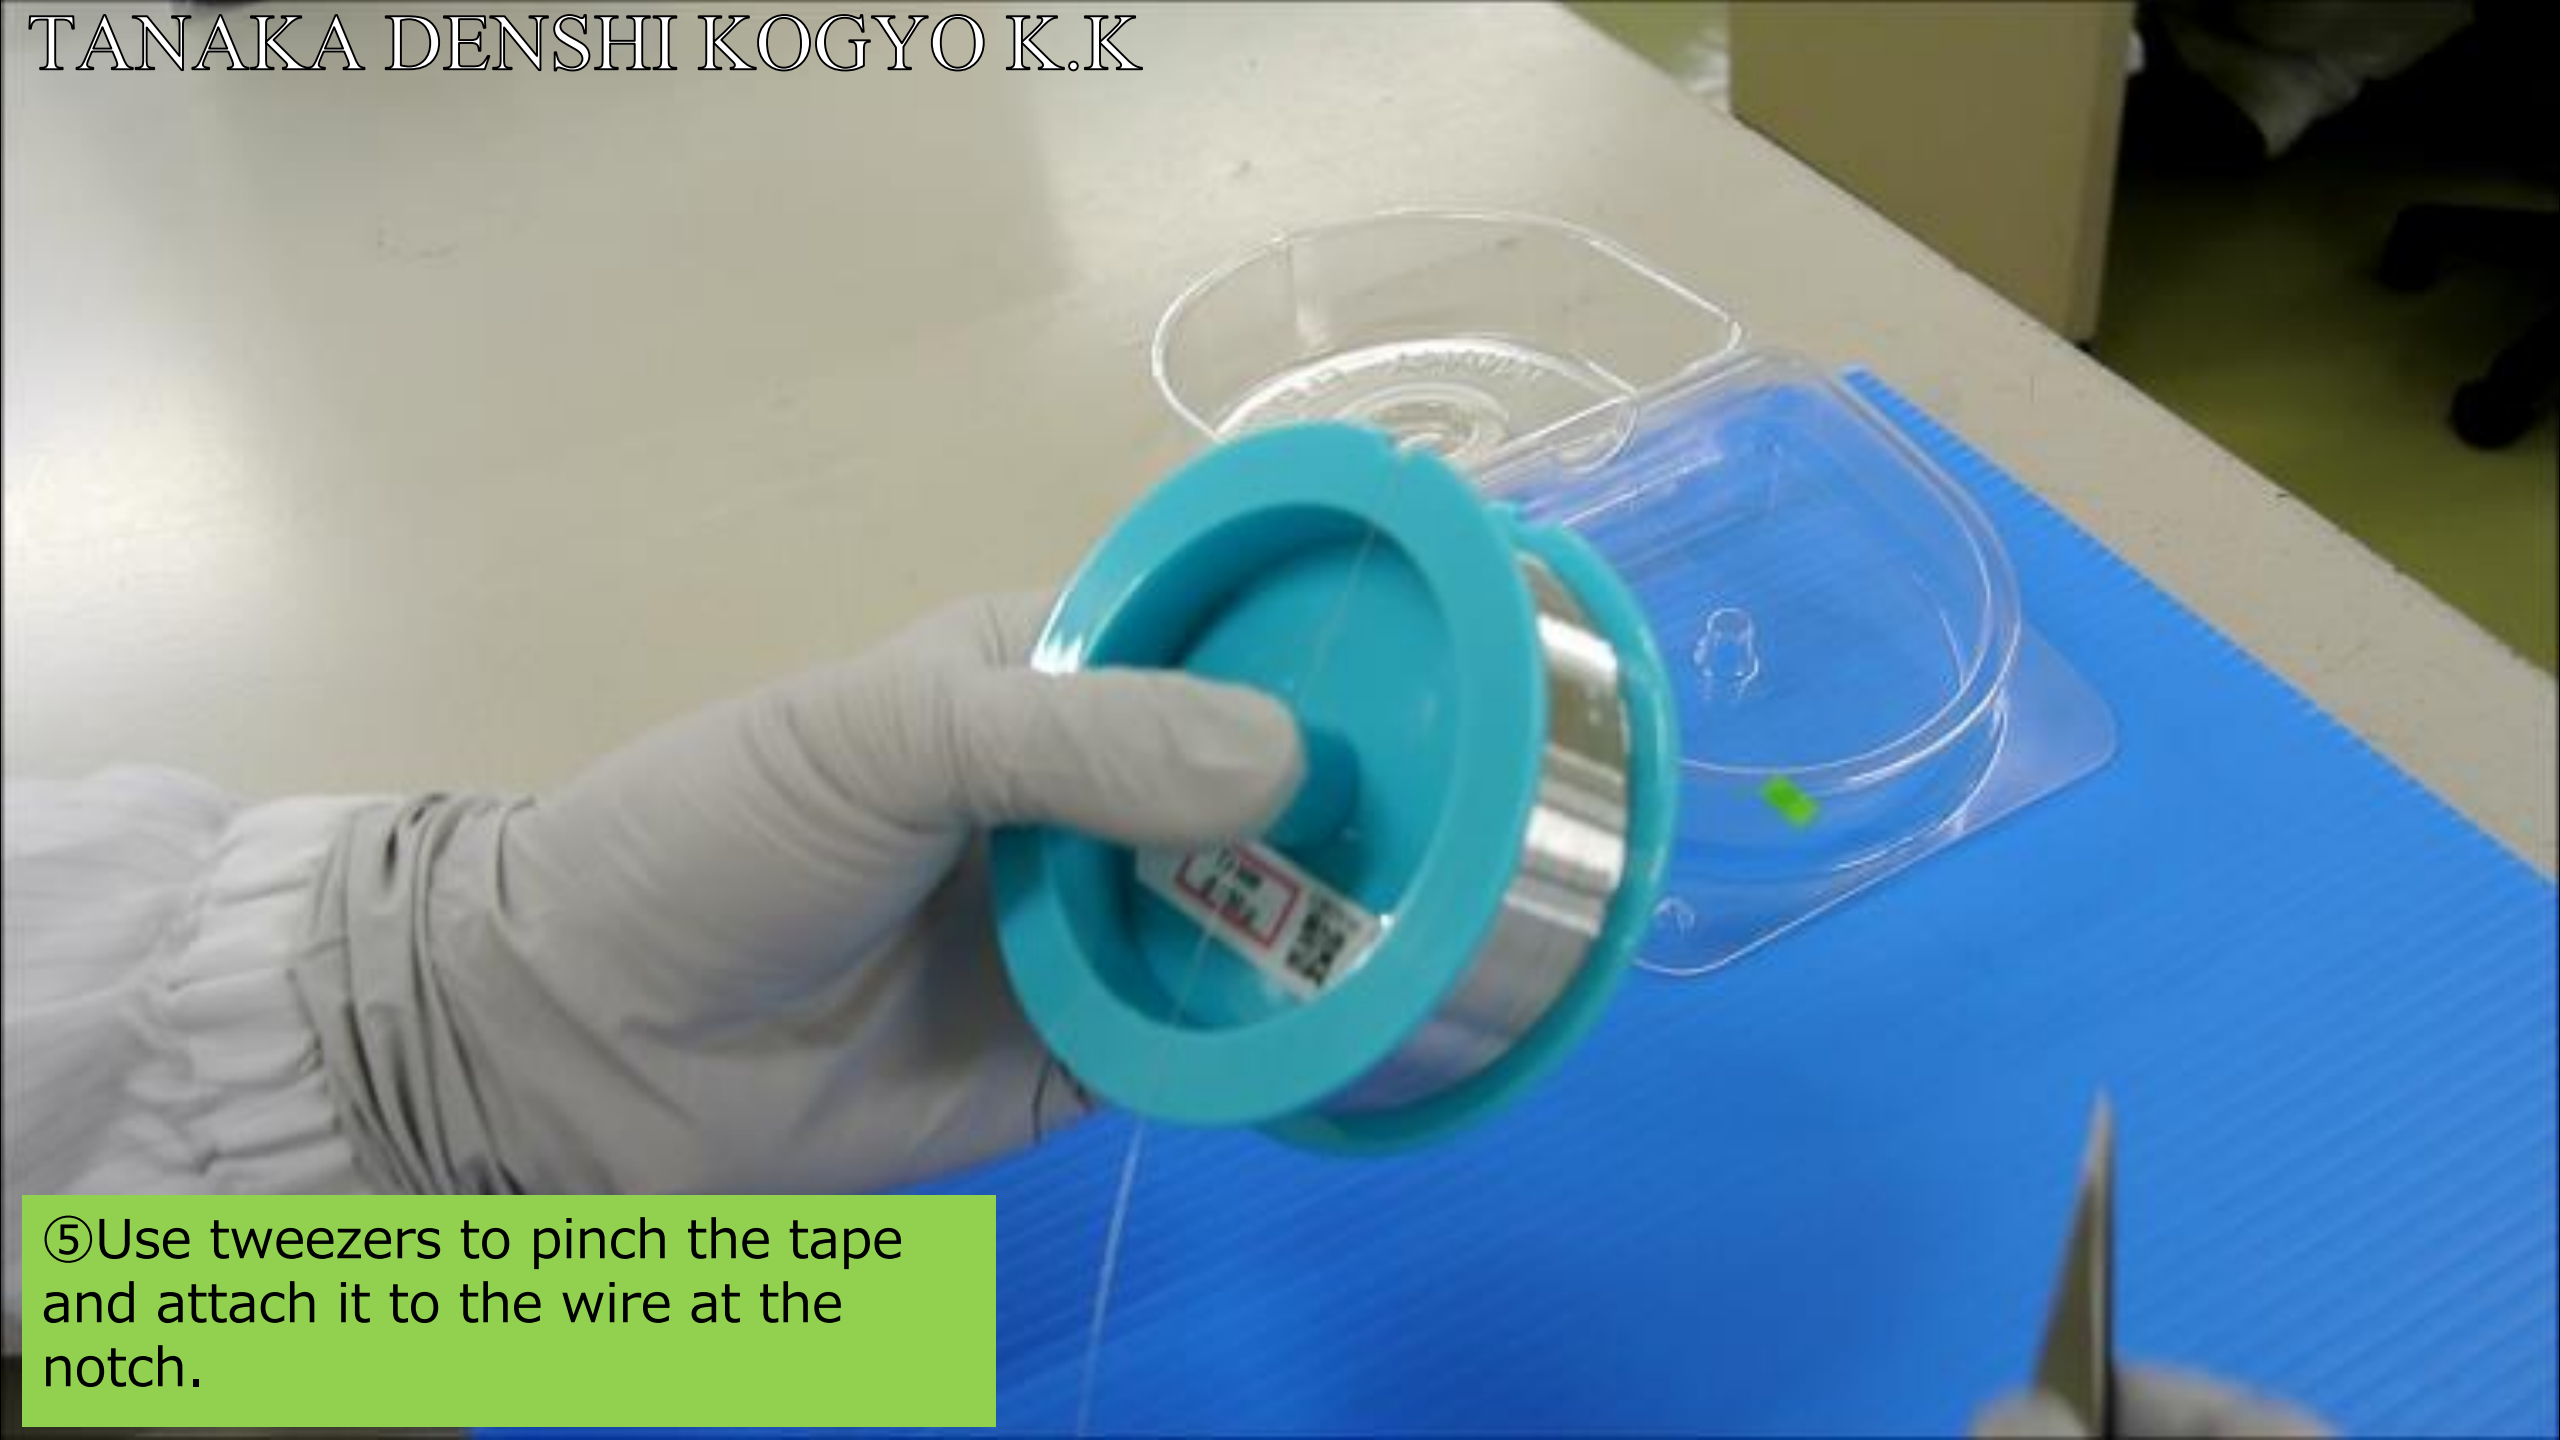

⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.

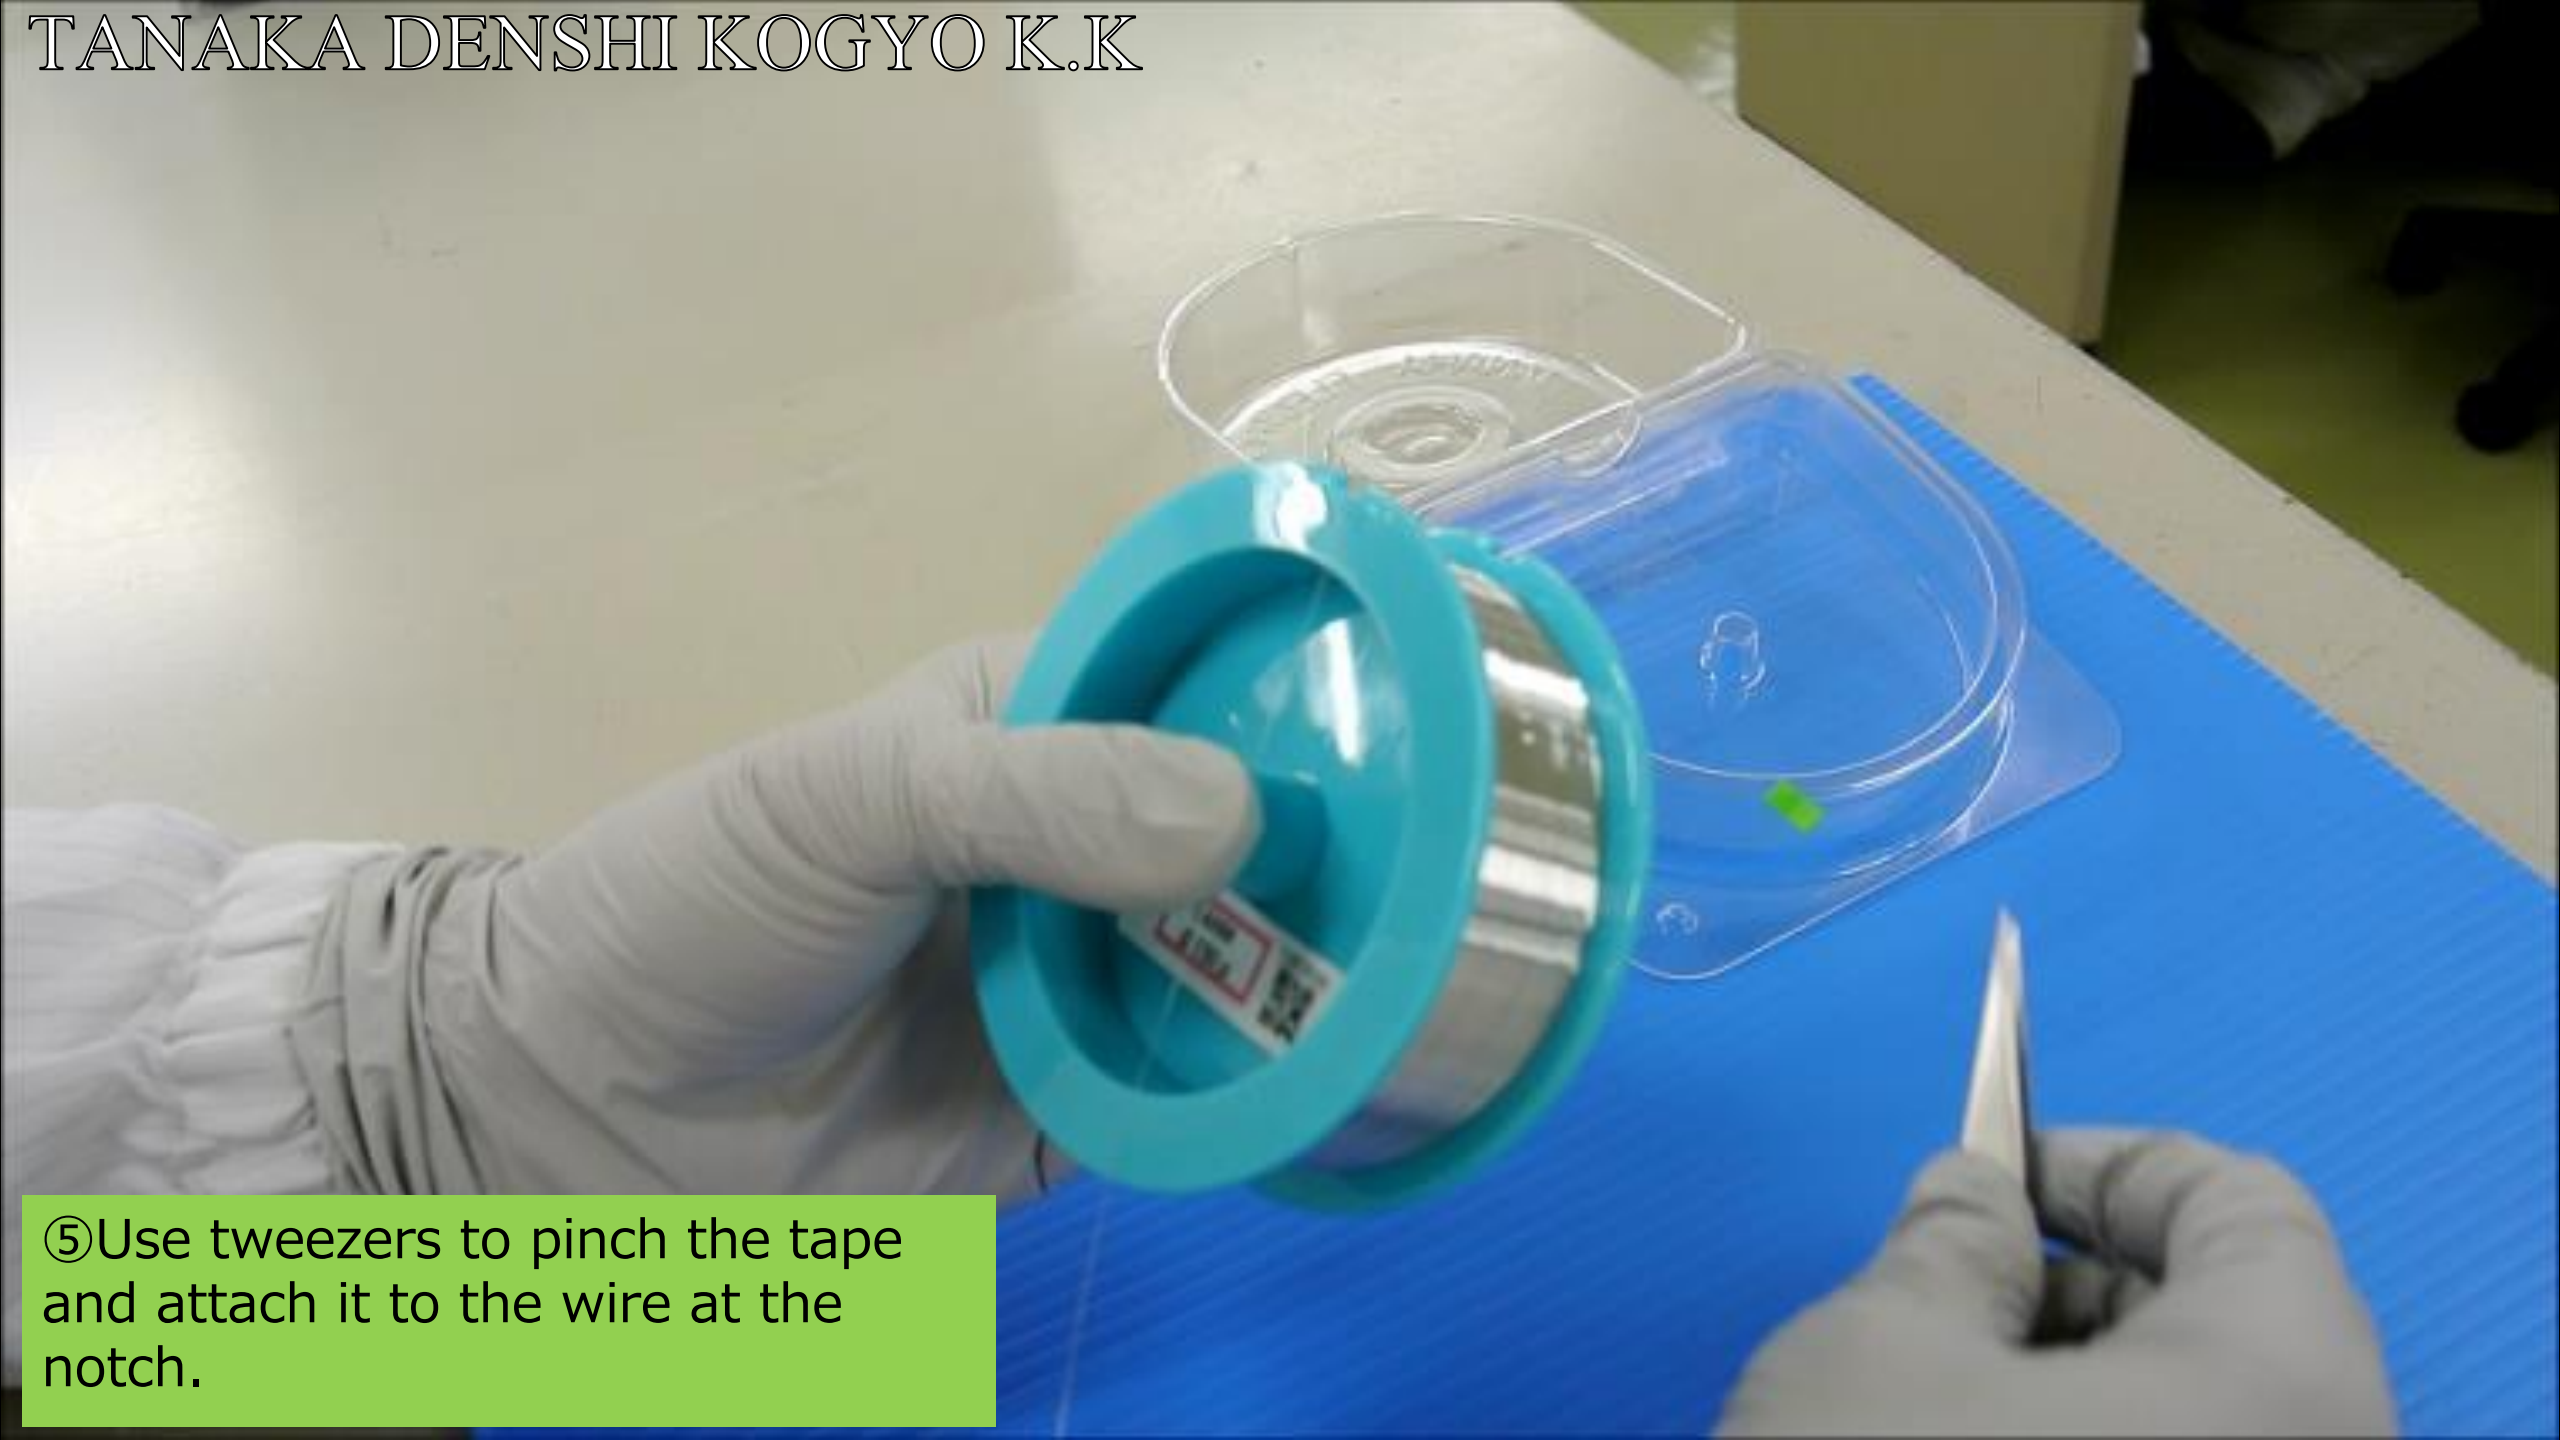

⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.






⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.

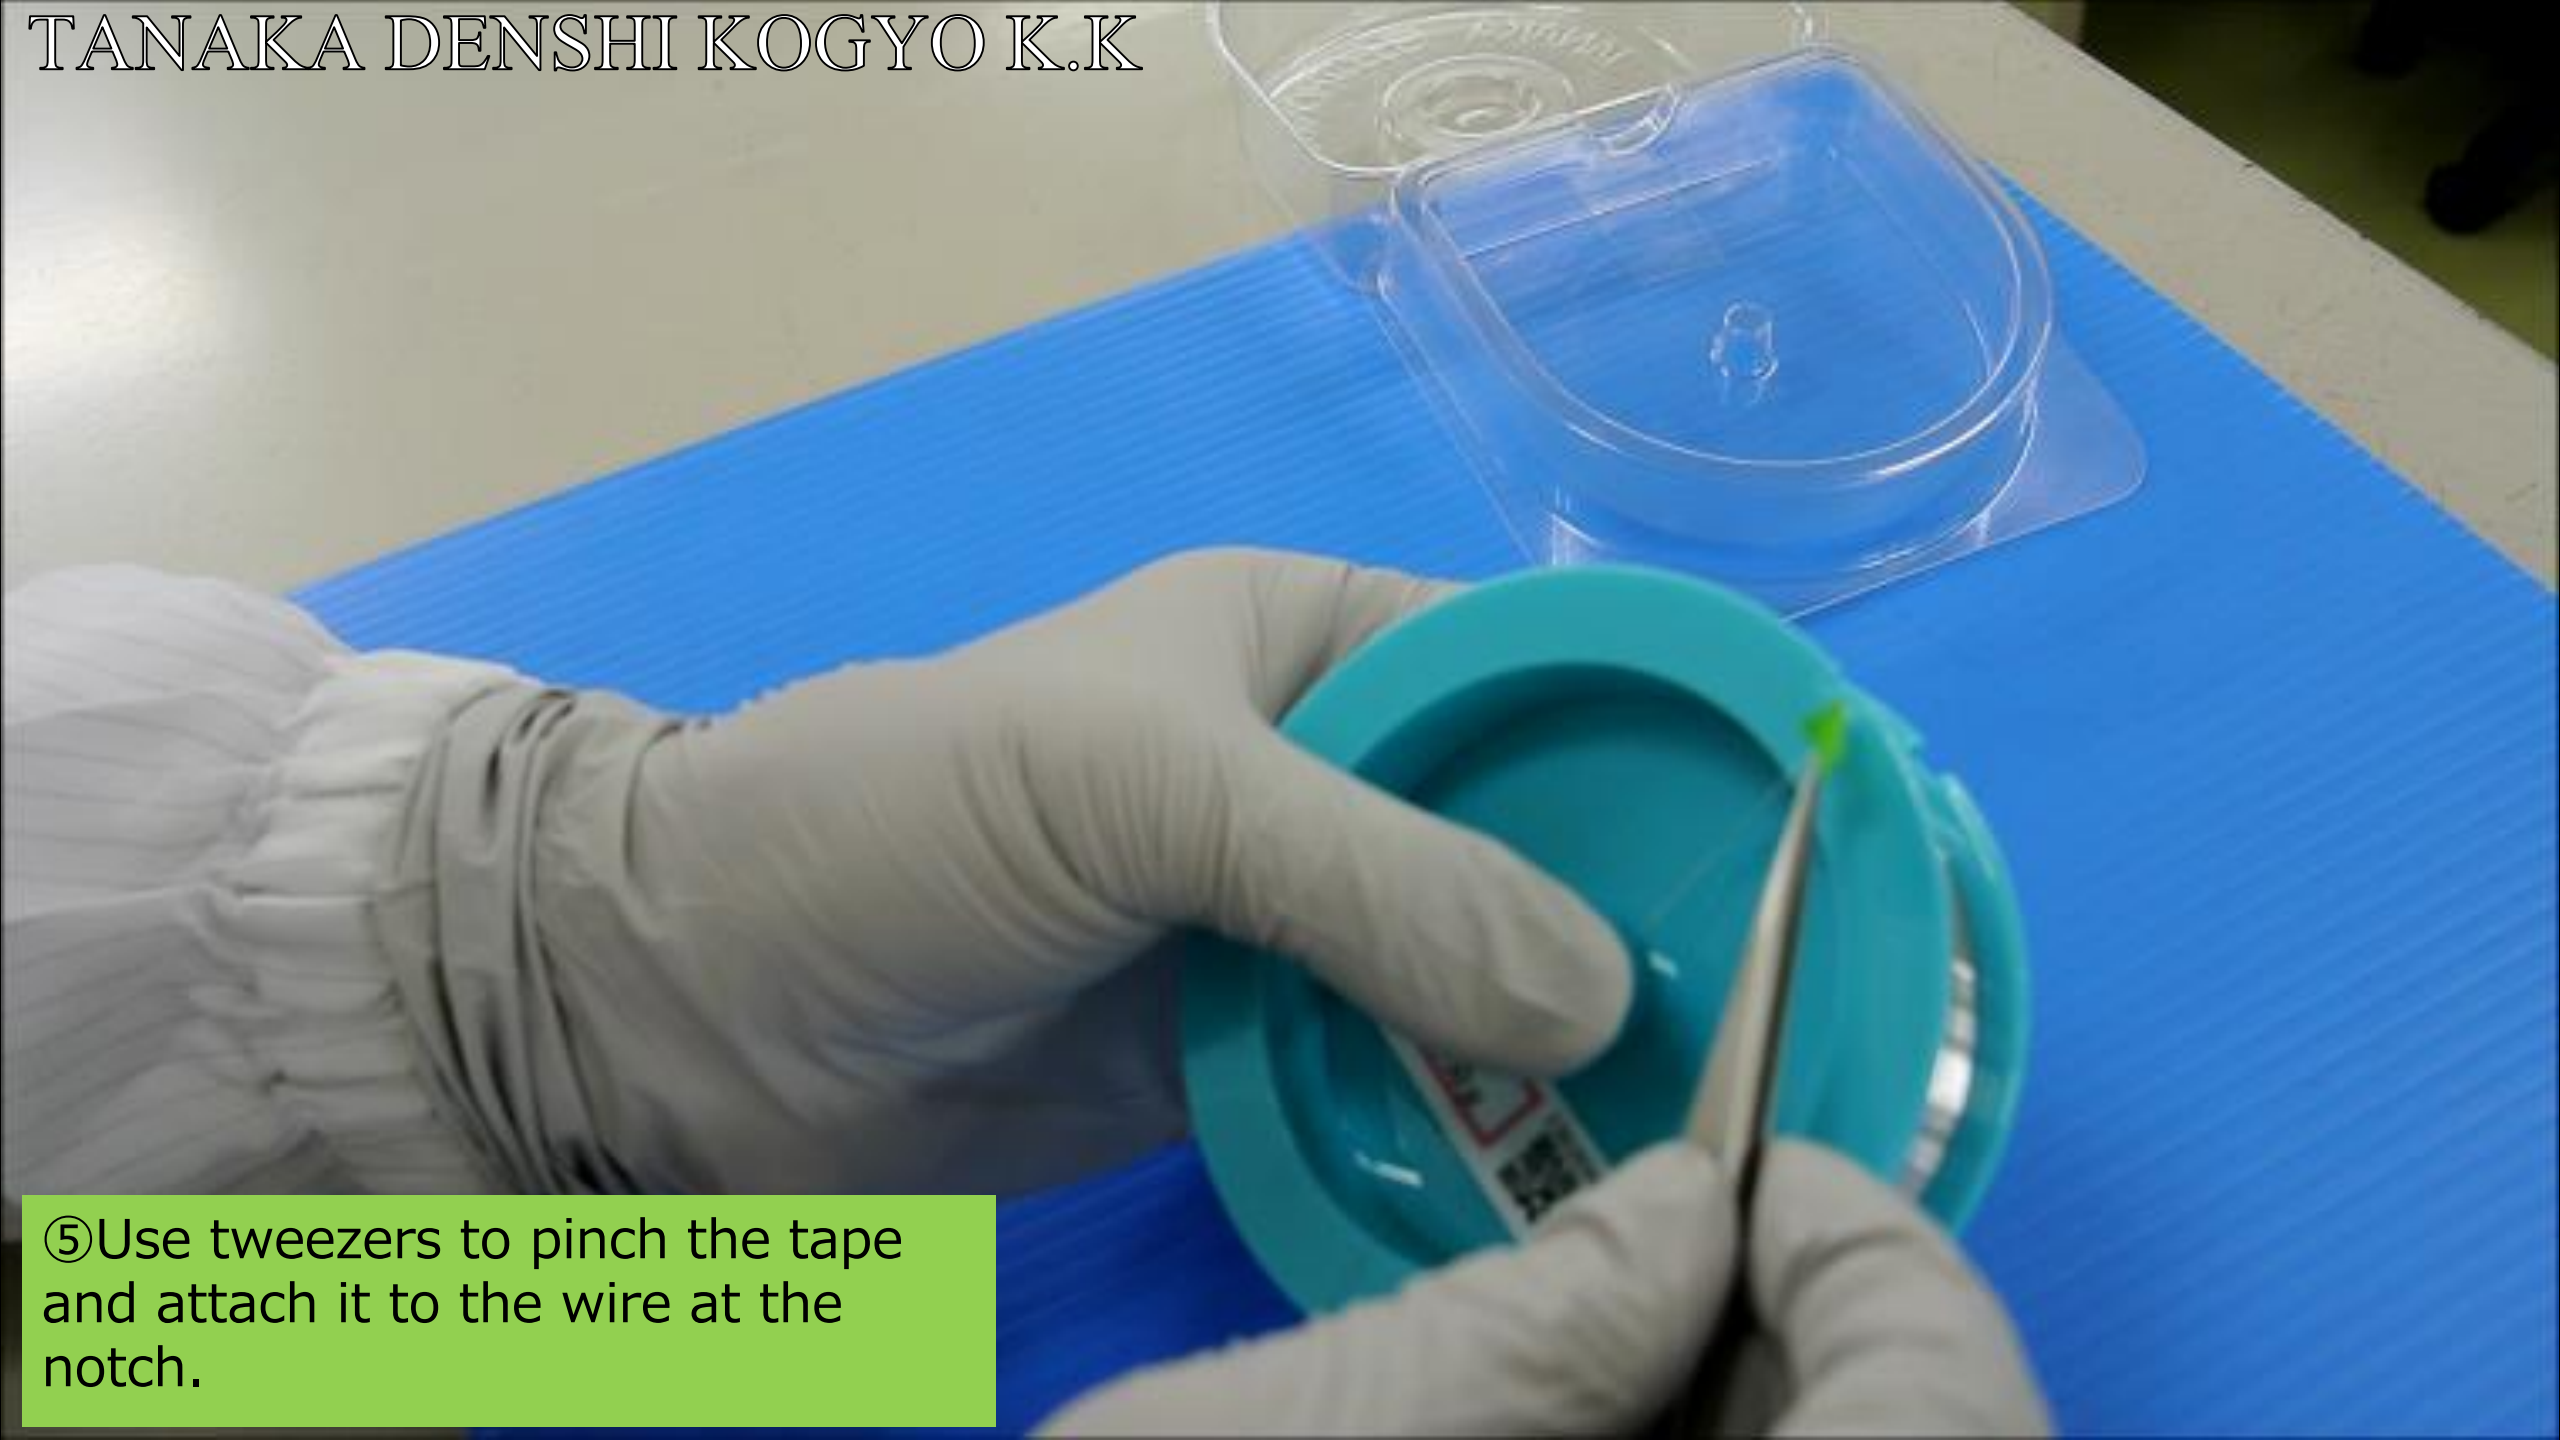

⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.




⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.




⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.

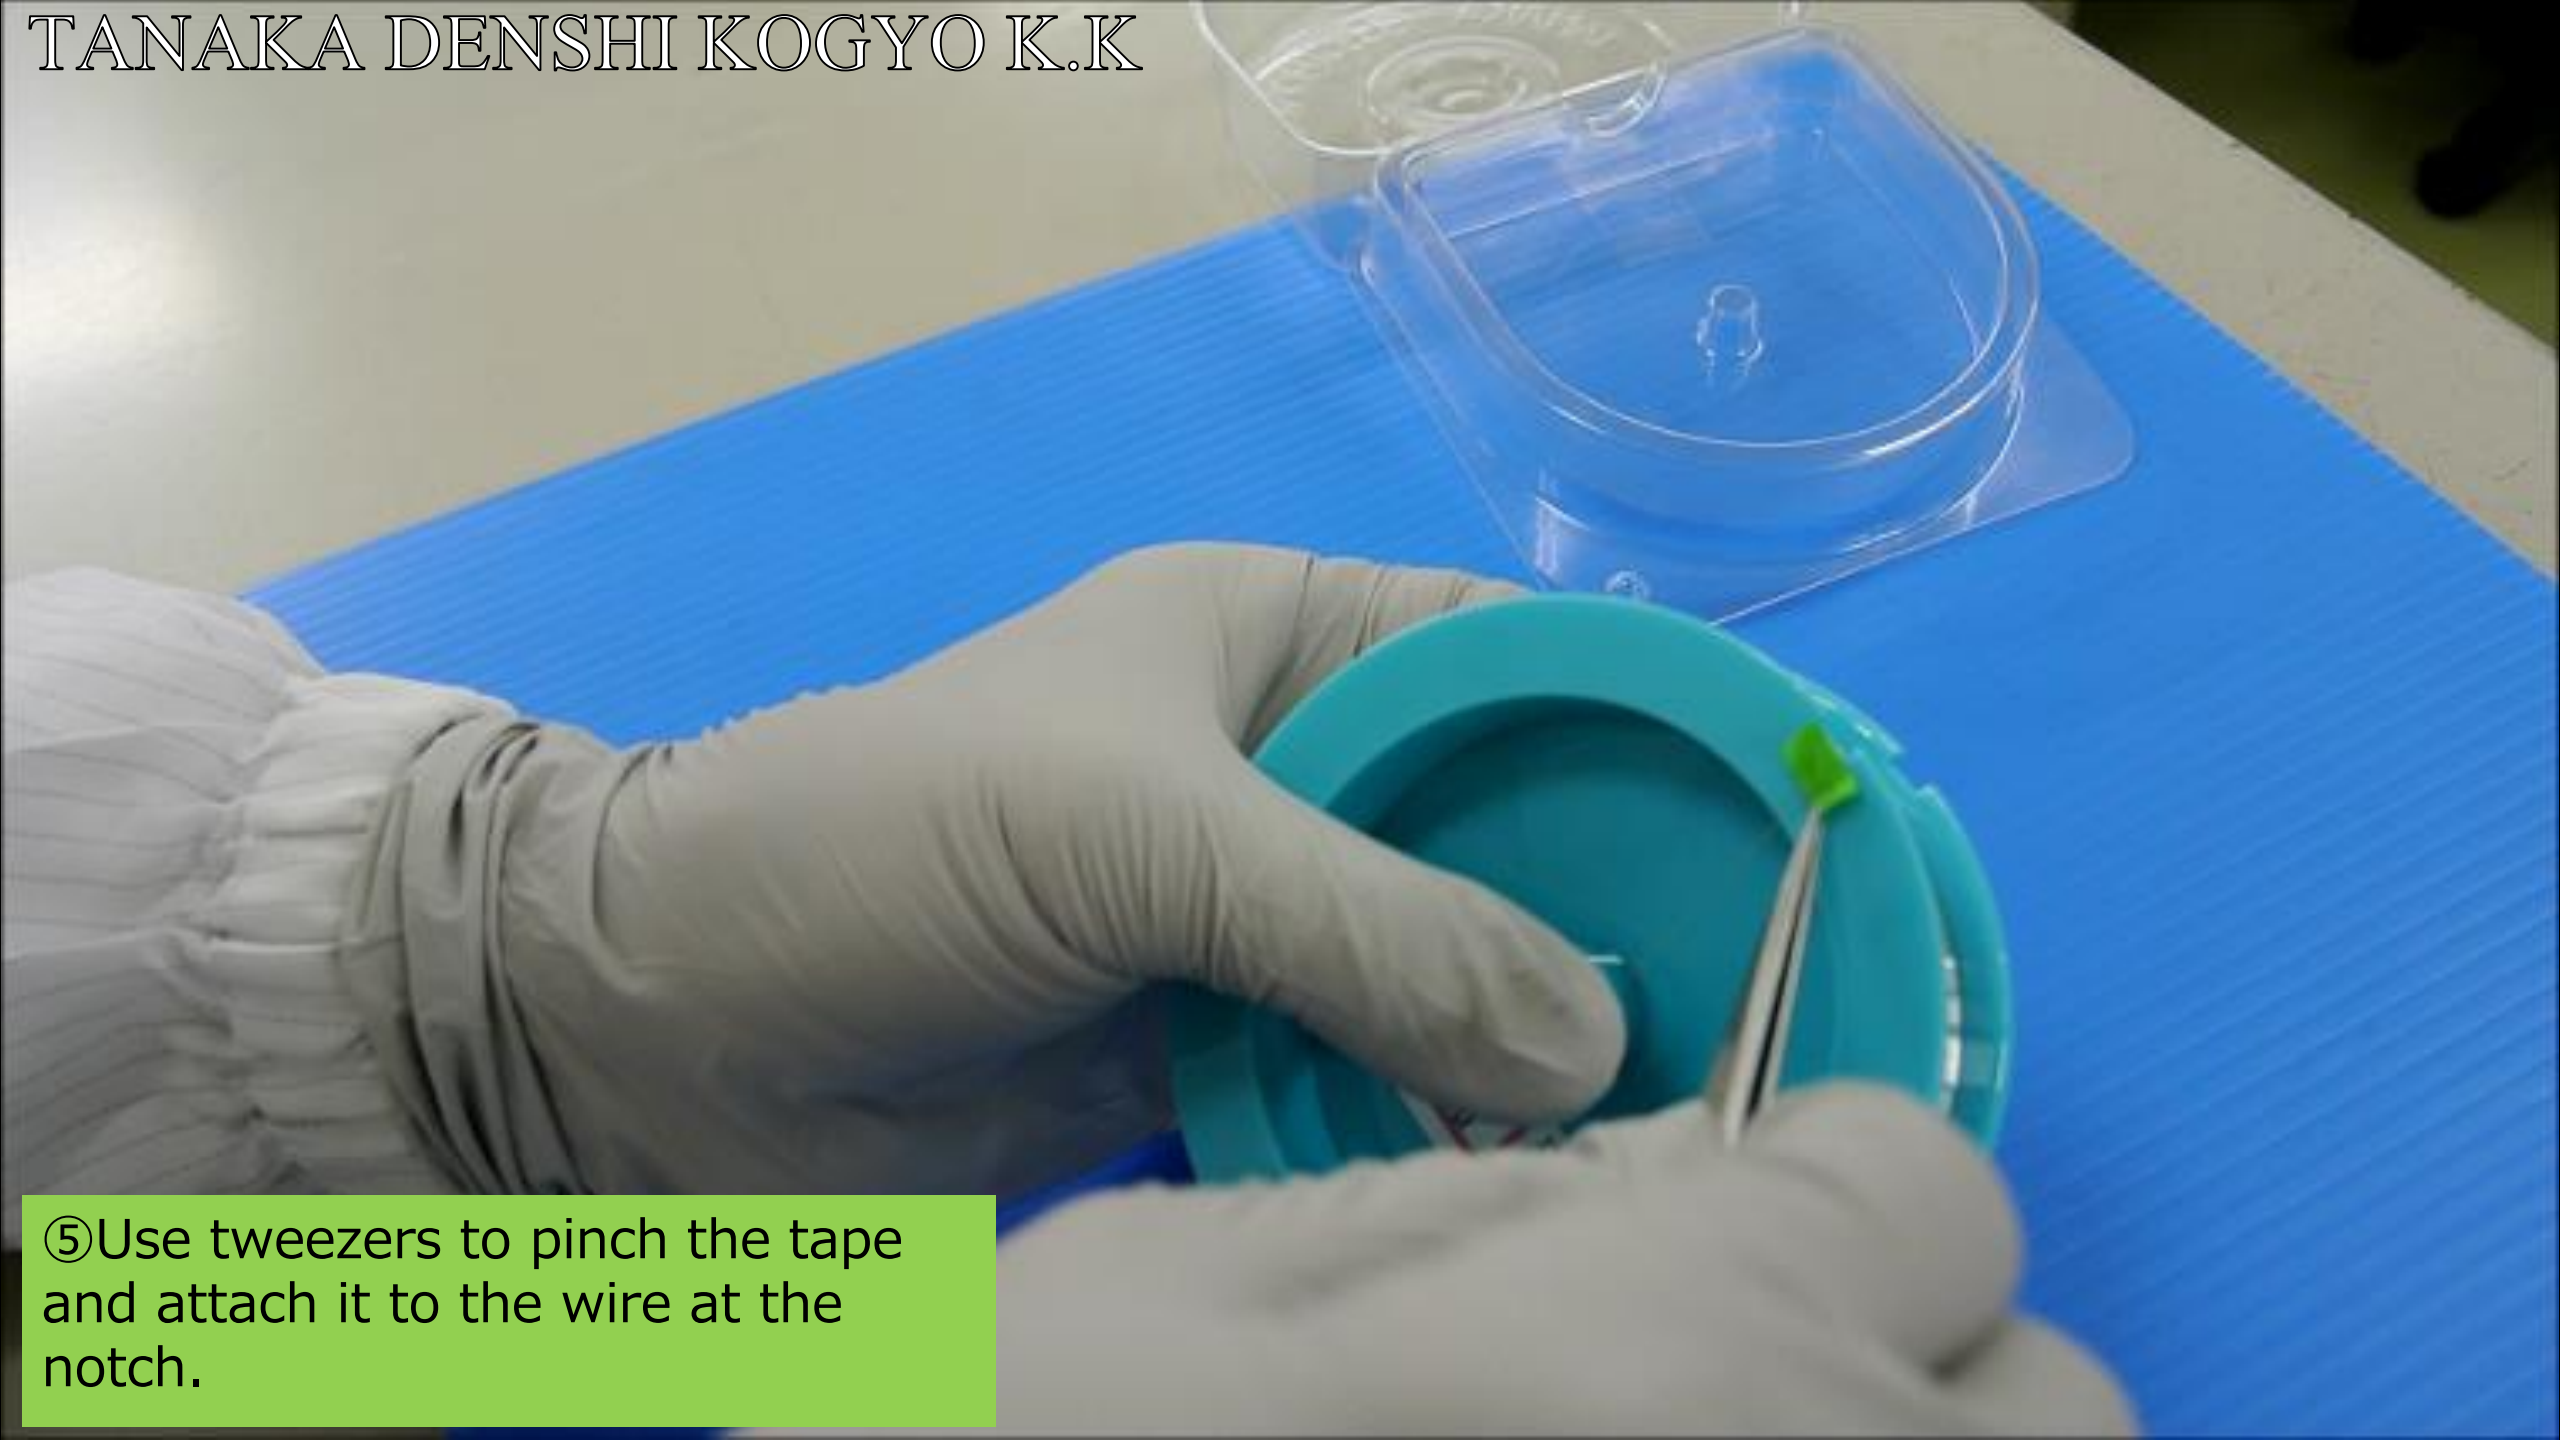


⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.

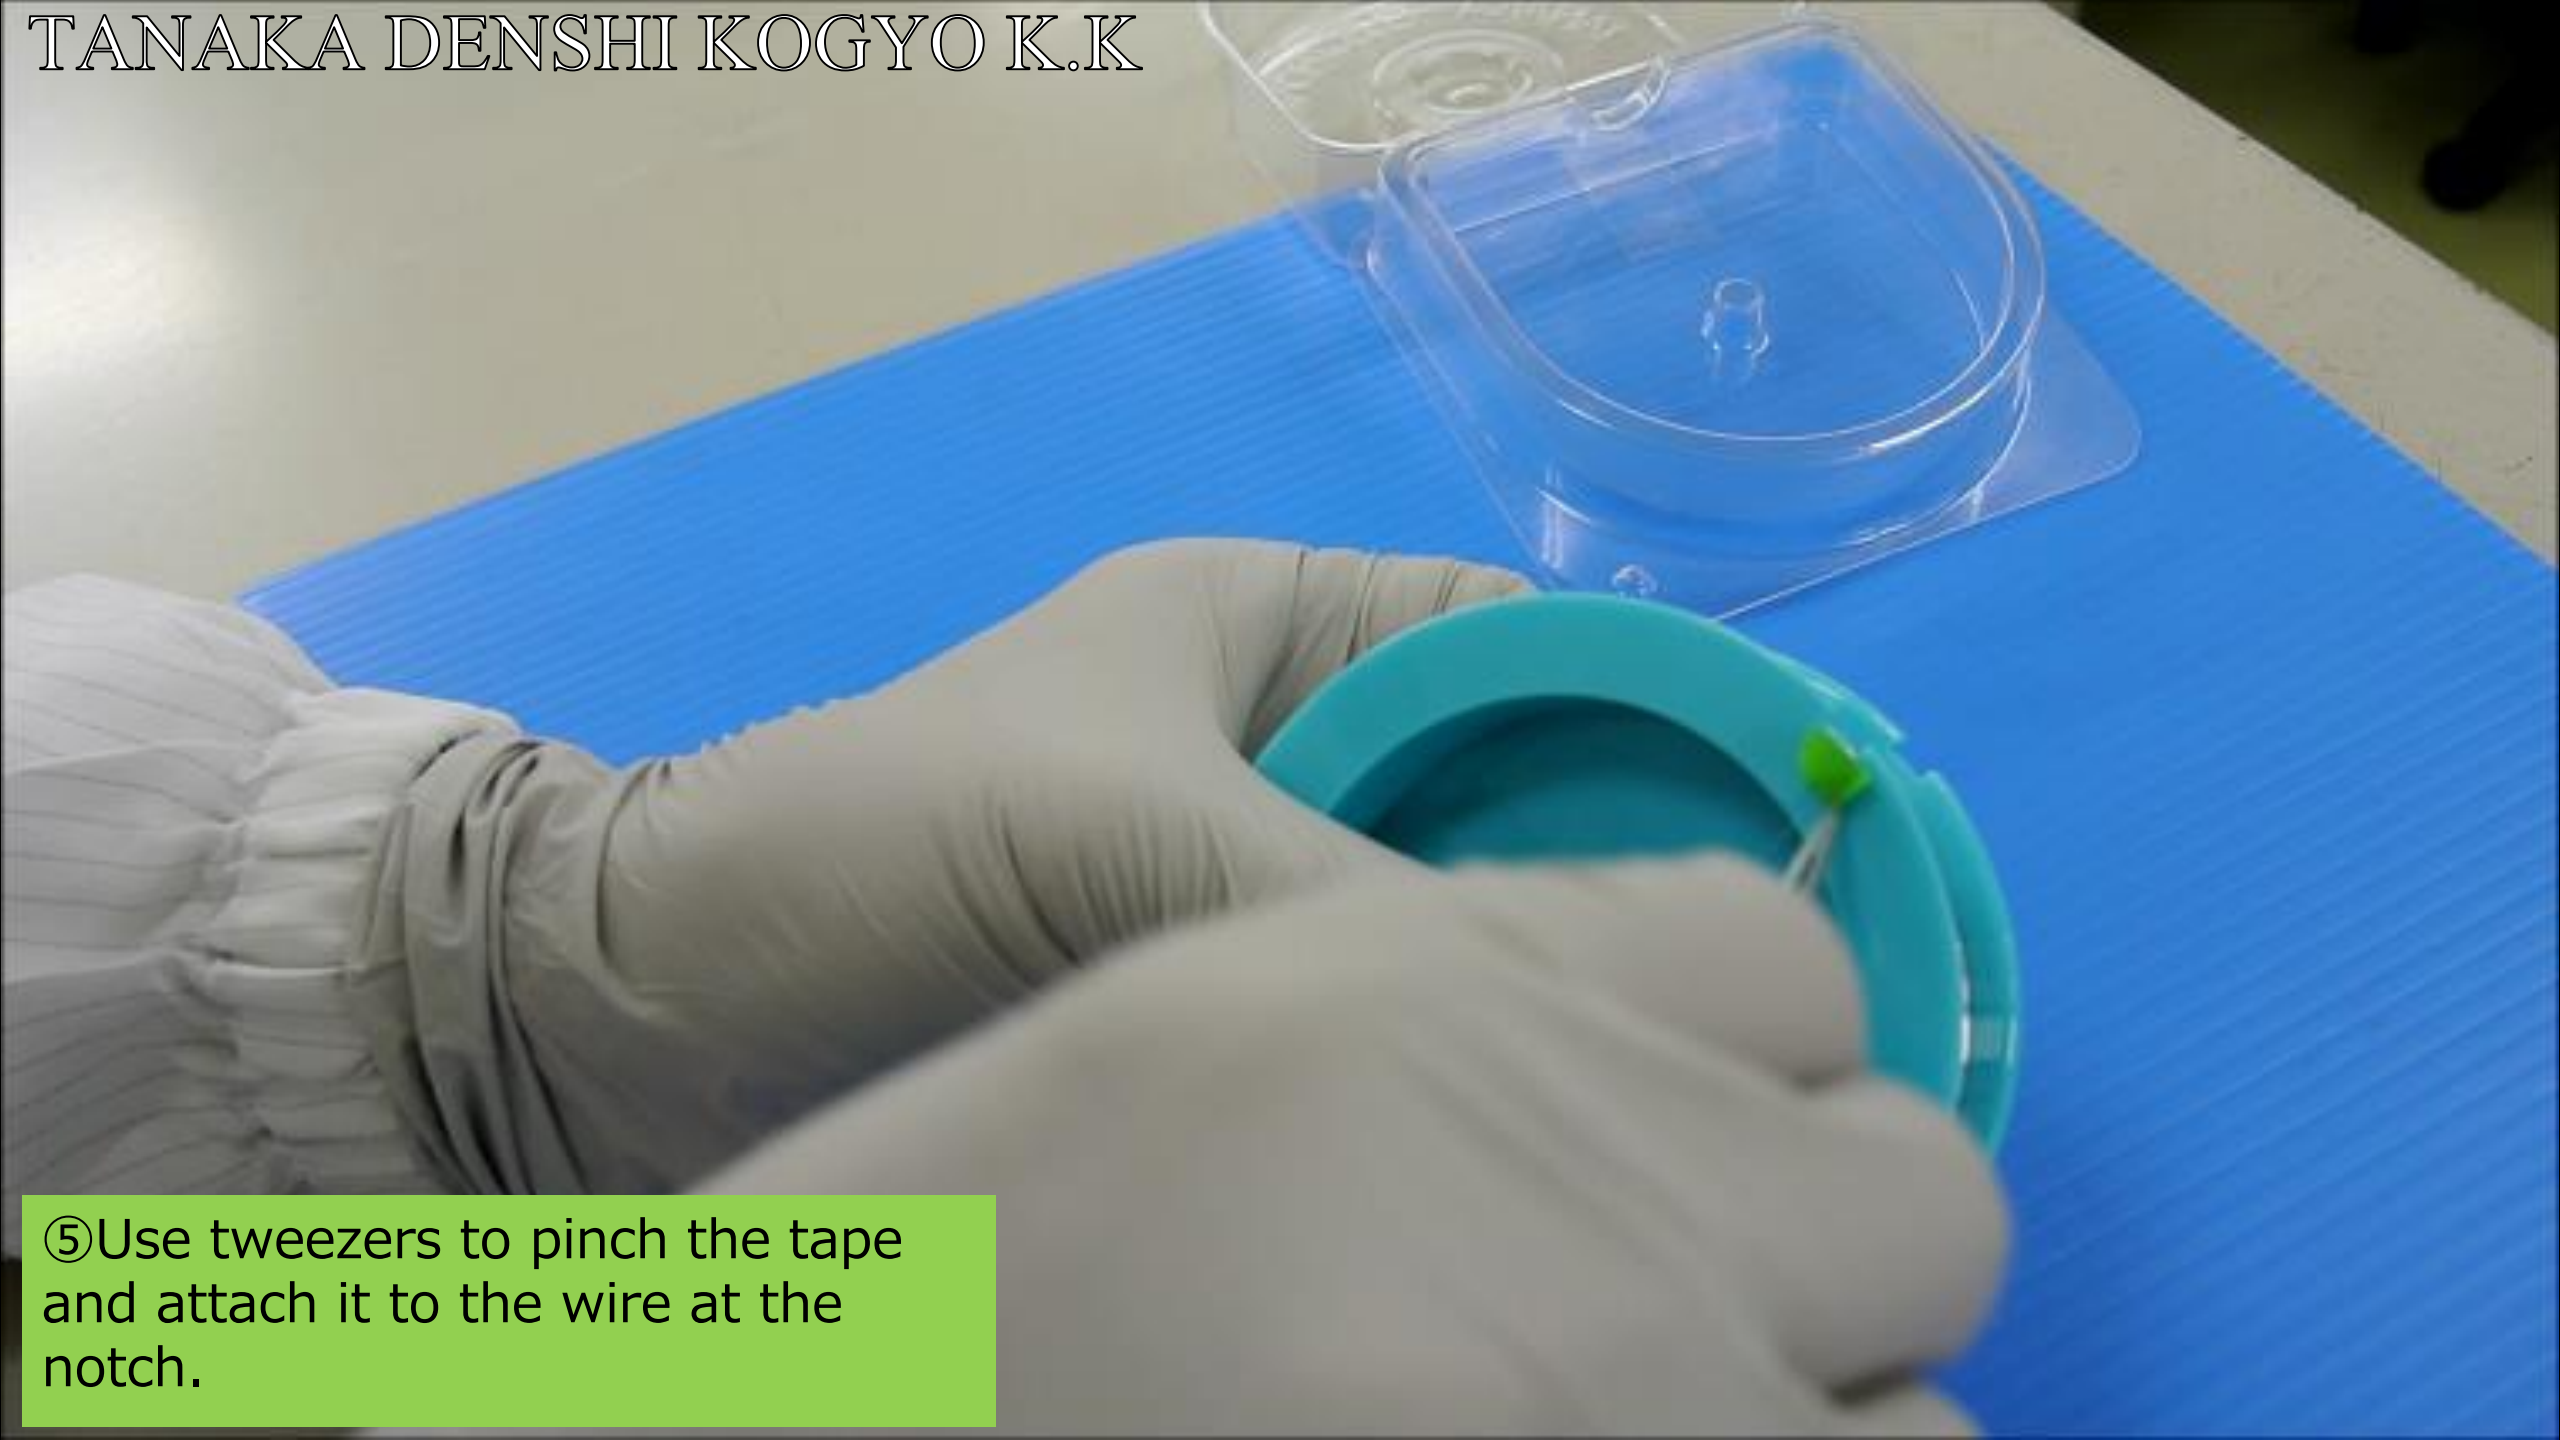

⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



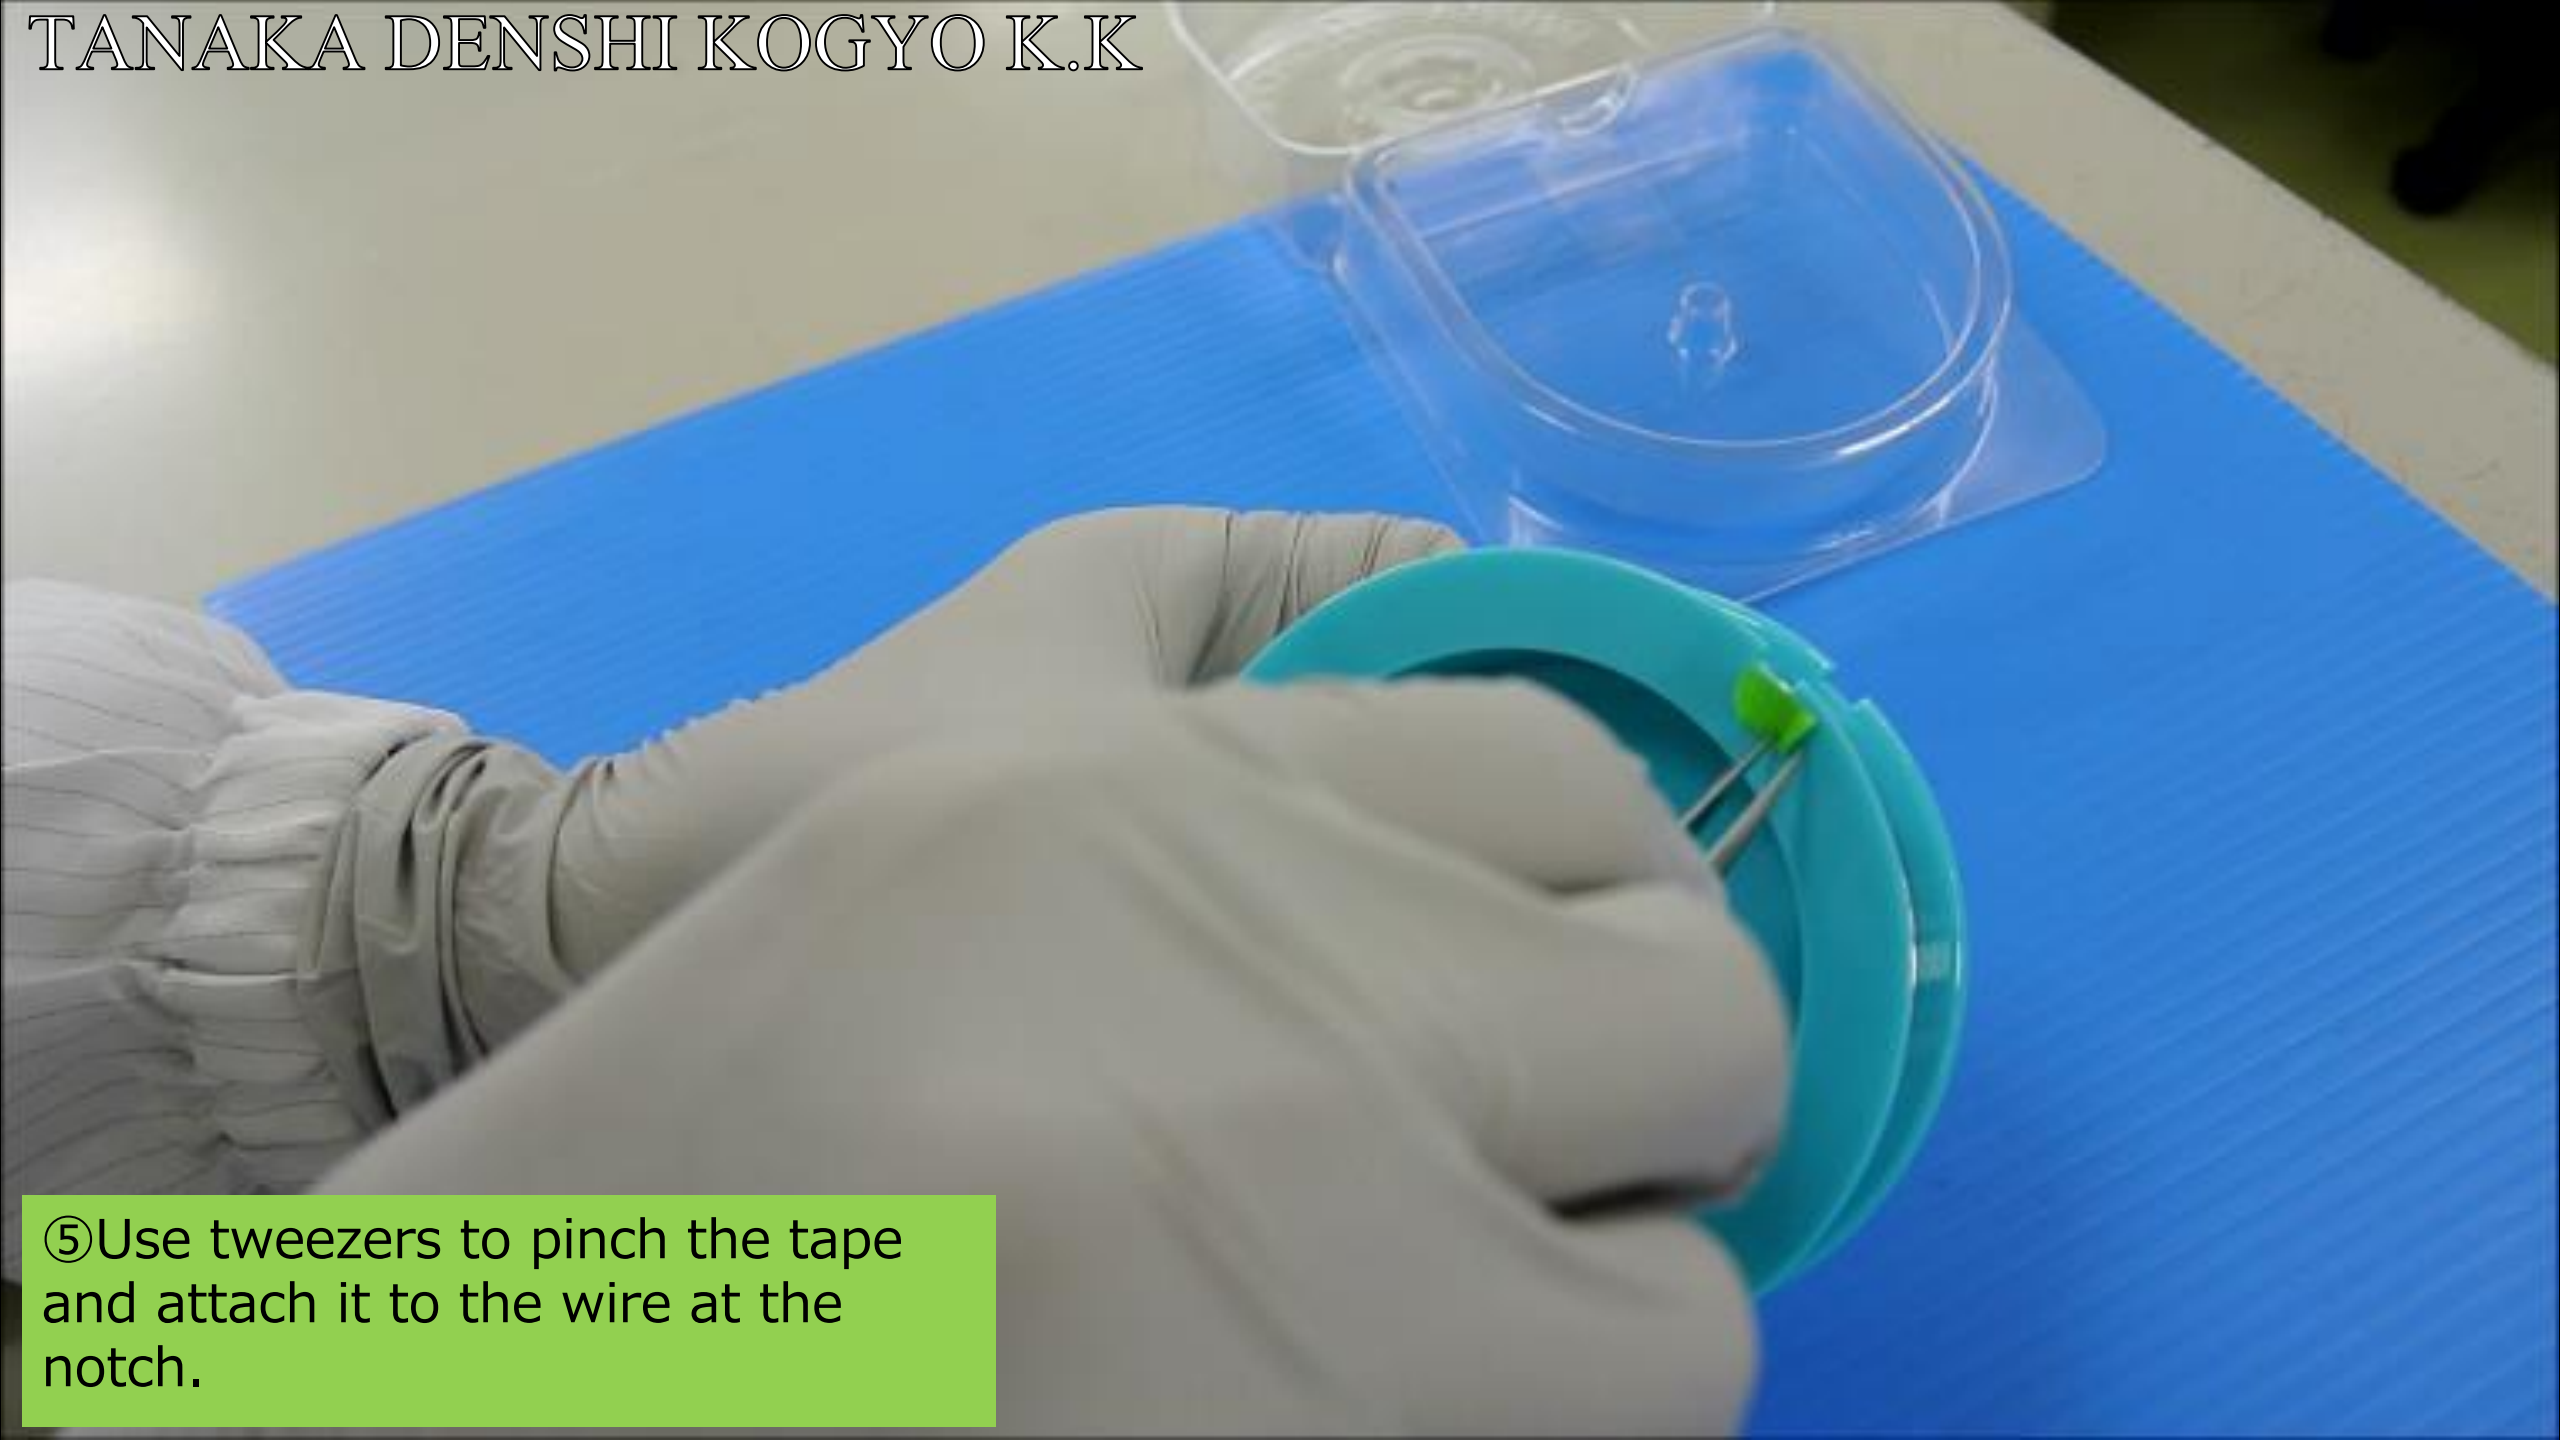

⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑤ Use tweezers to pinch the tape and attach it to the wire at the notch.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.




⑥ Hold the tape with your finger and remove the excess wire with tweezers.






⑥ Hold the tape with your finger and remove the excess wire with tweezers.

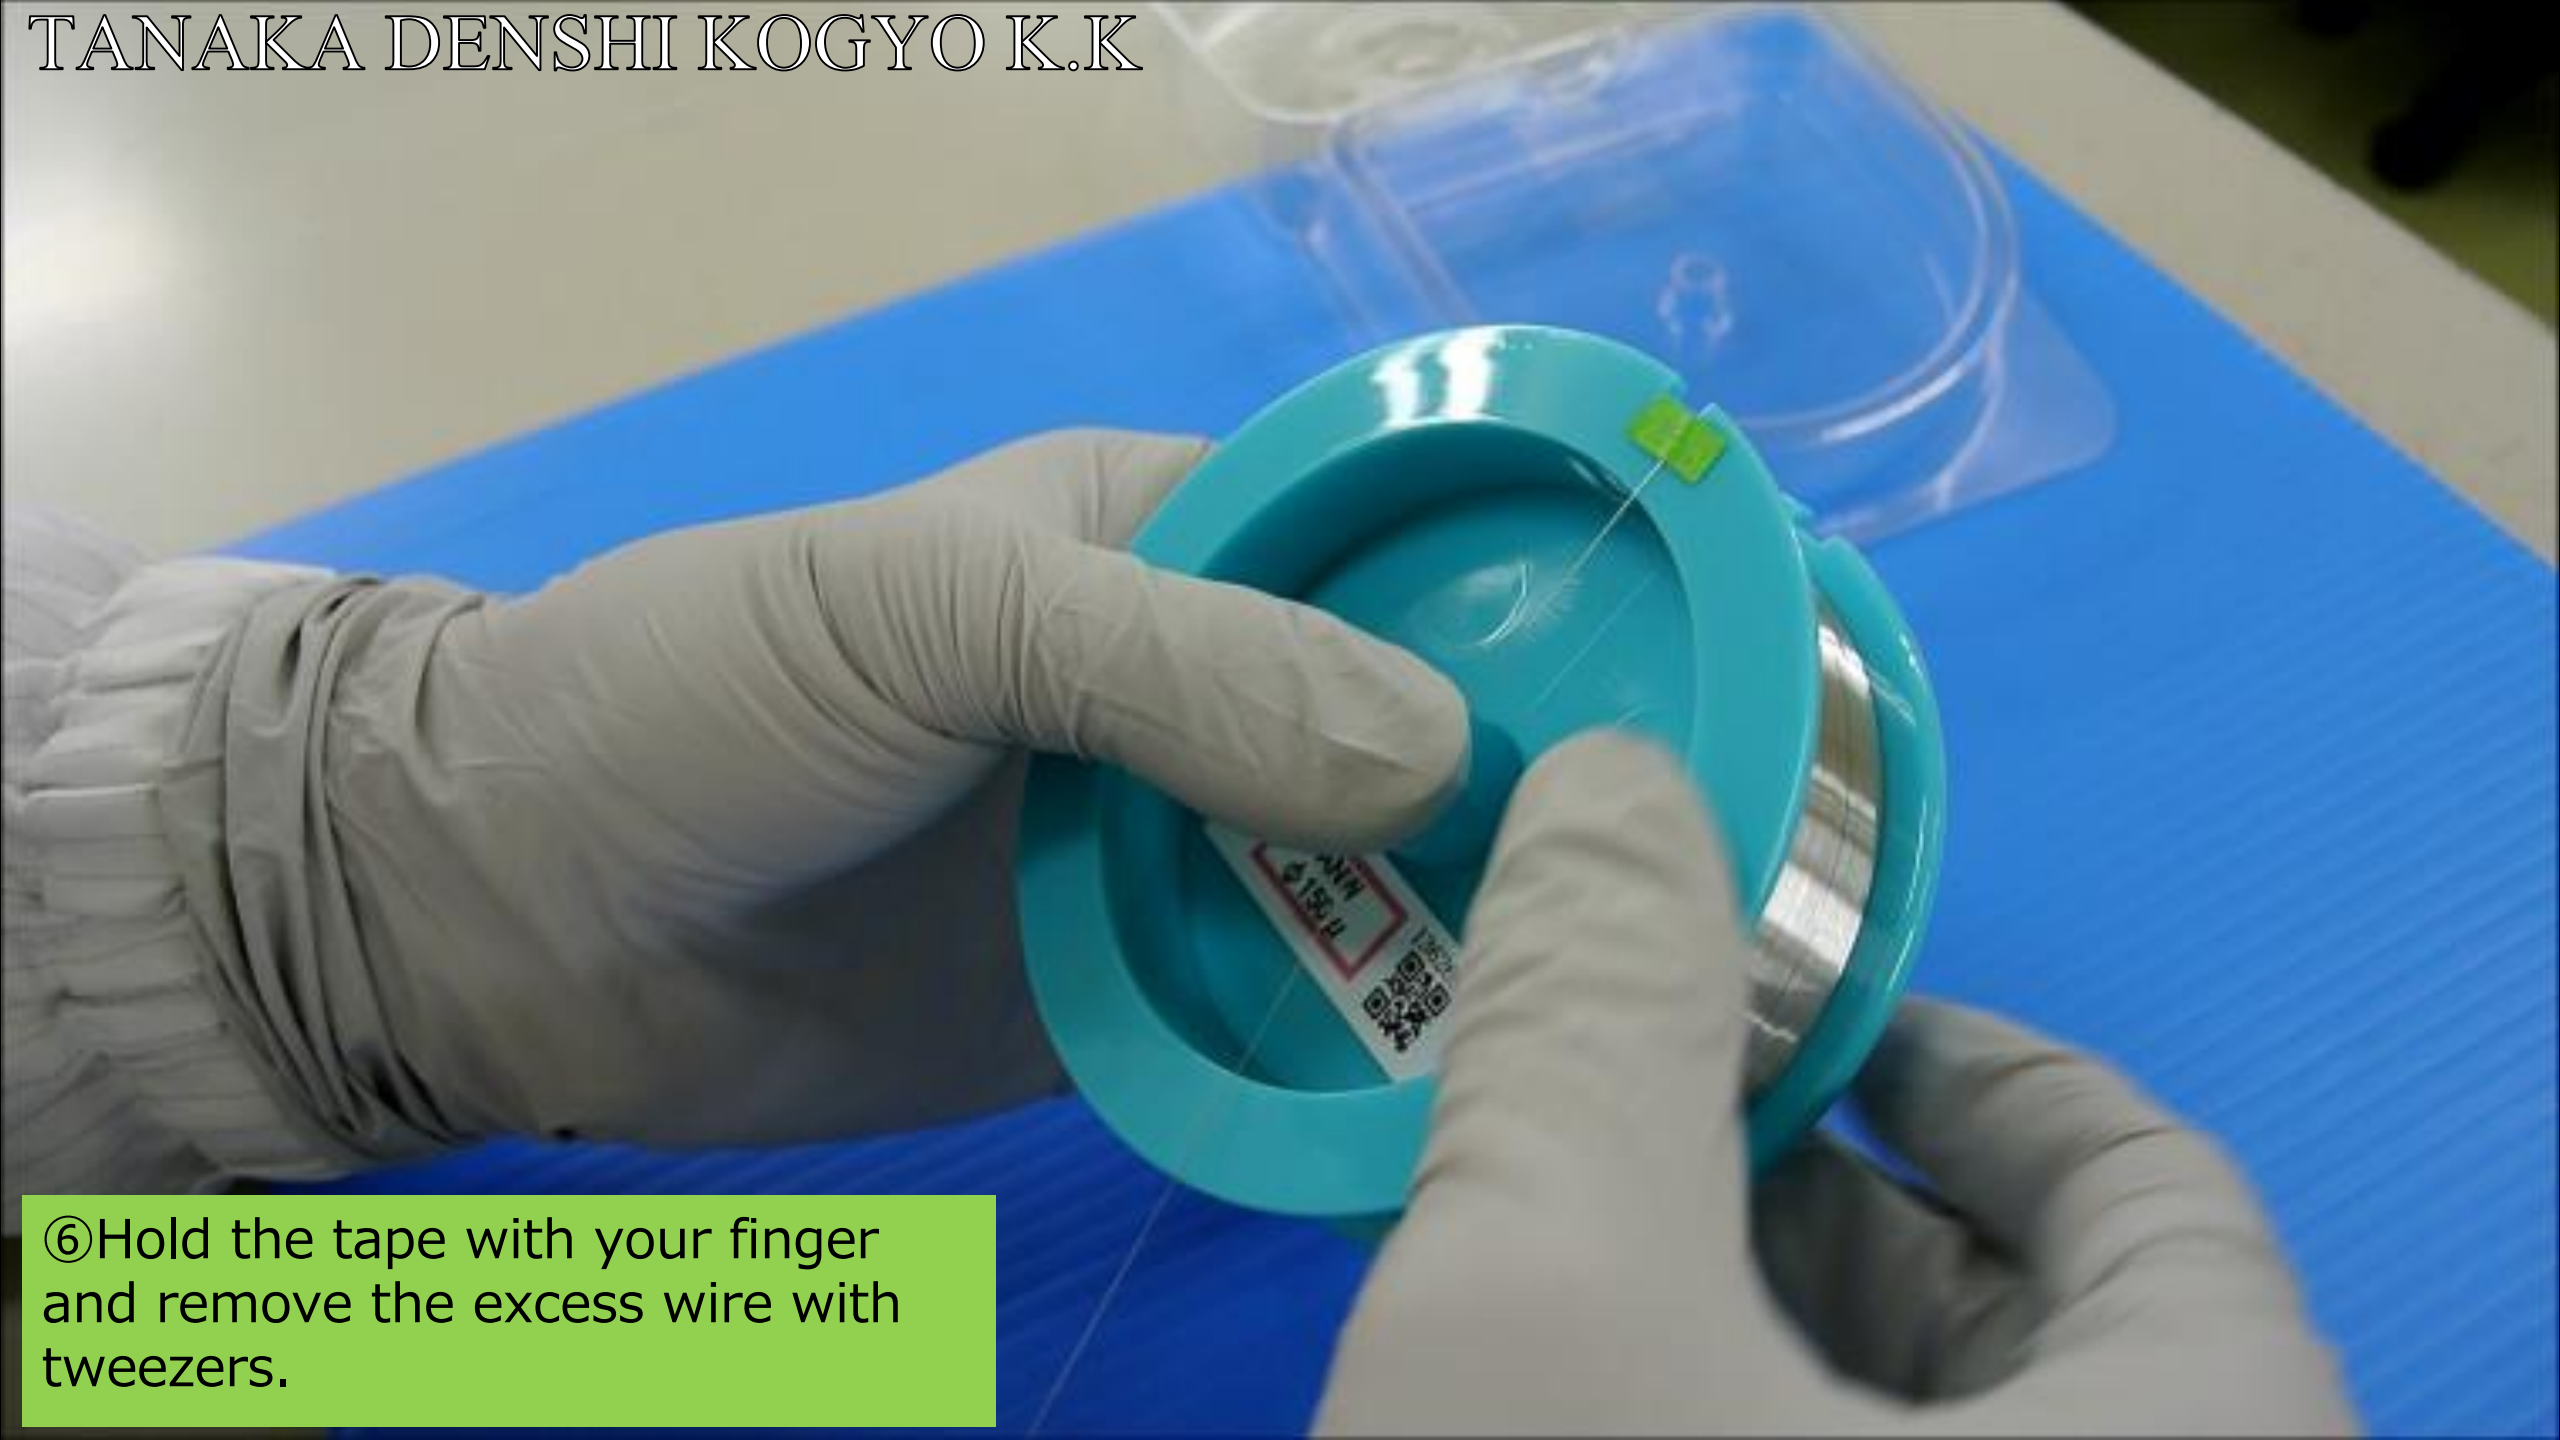

⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.





⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.





⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.



⑥ Hold the tape with your finger and remove the excess wire with tweezers.




⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.




⑦ Hold the center of the spool and return it to the case.

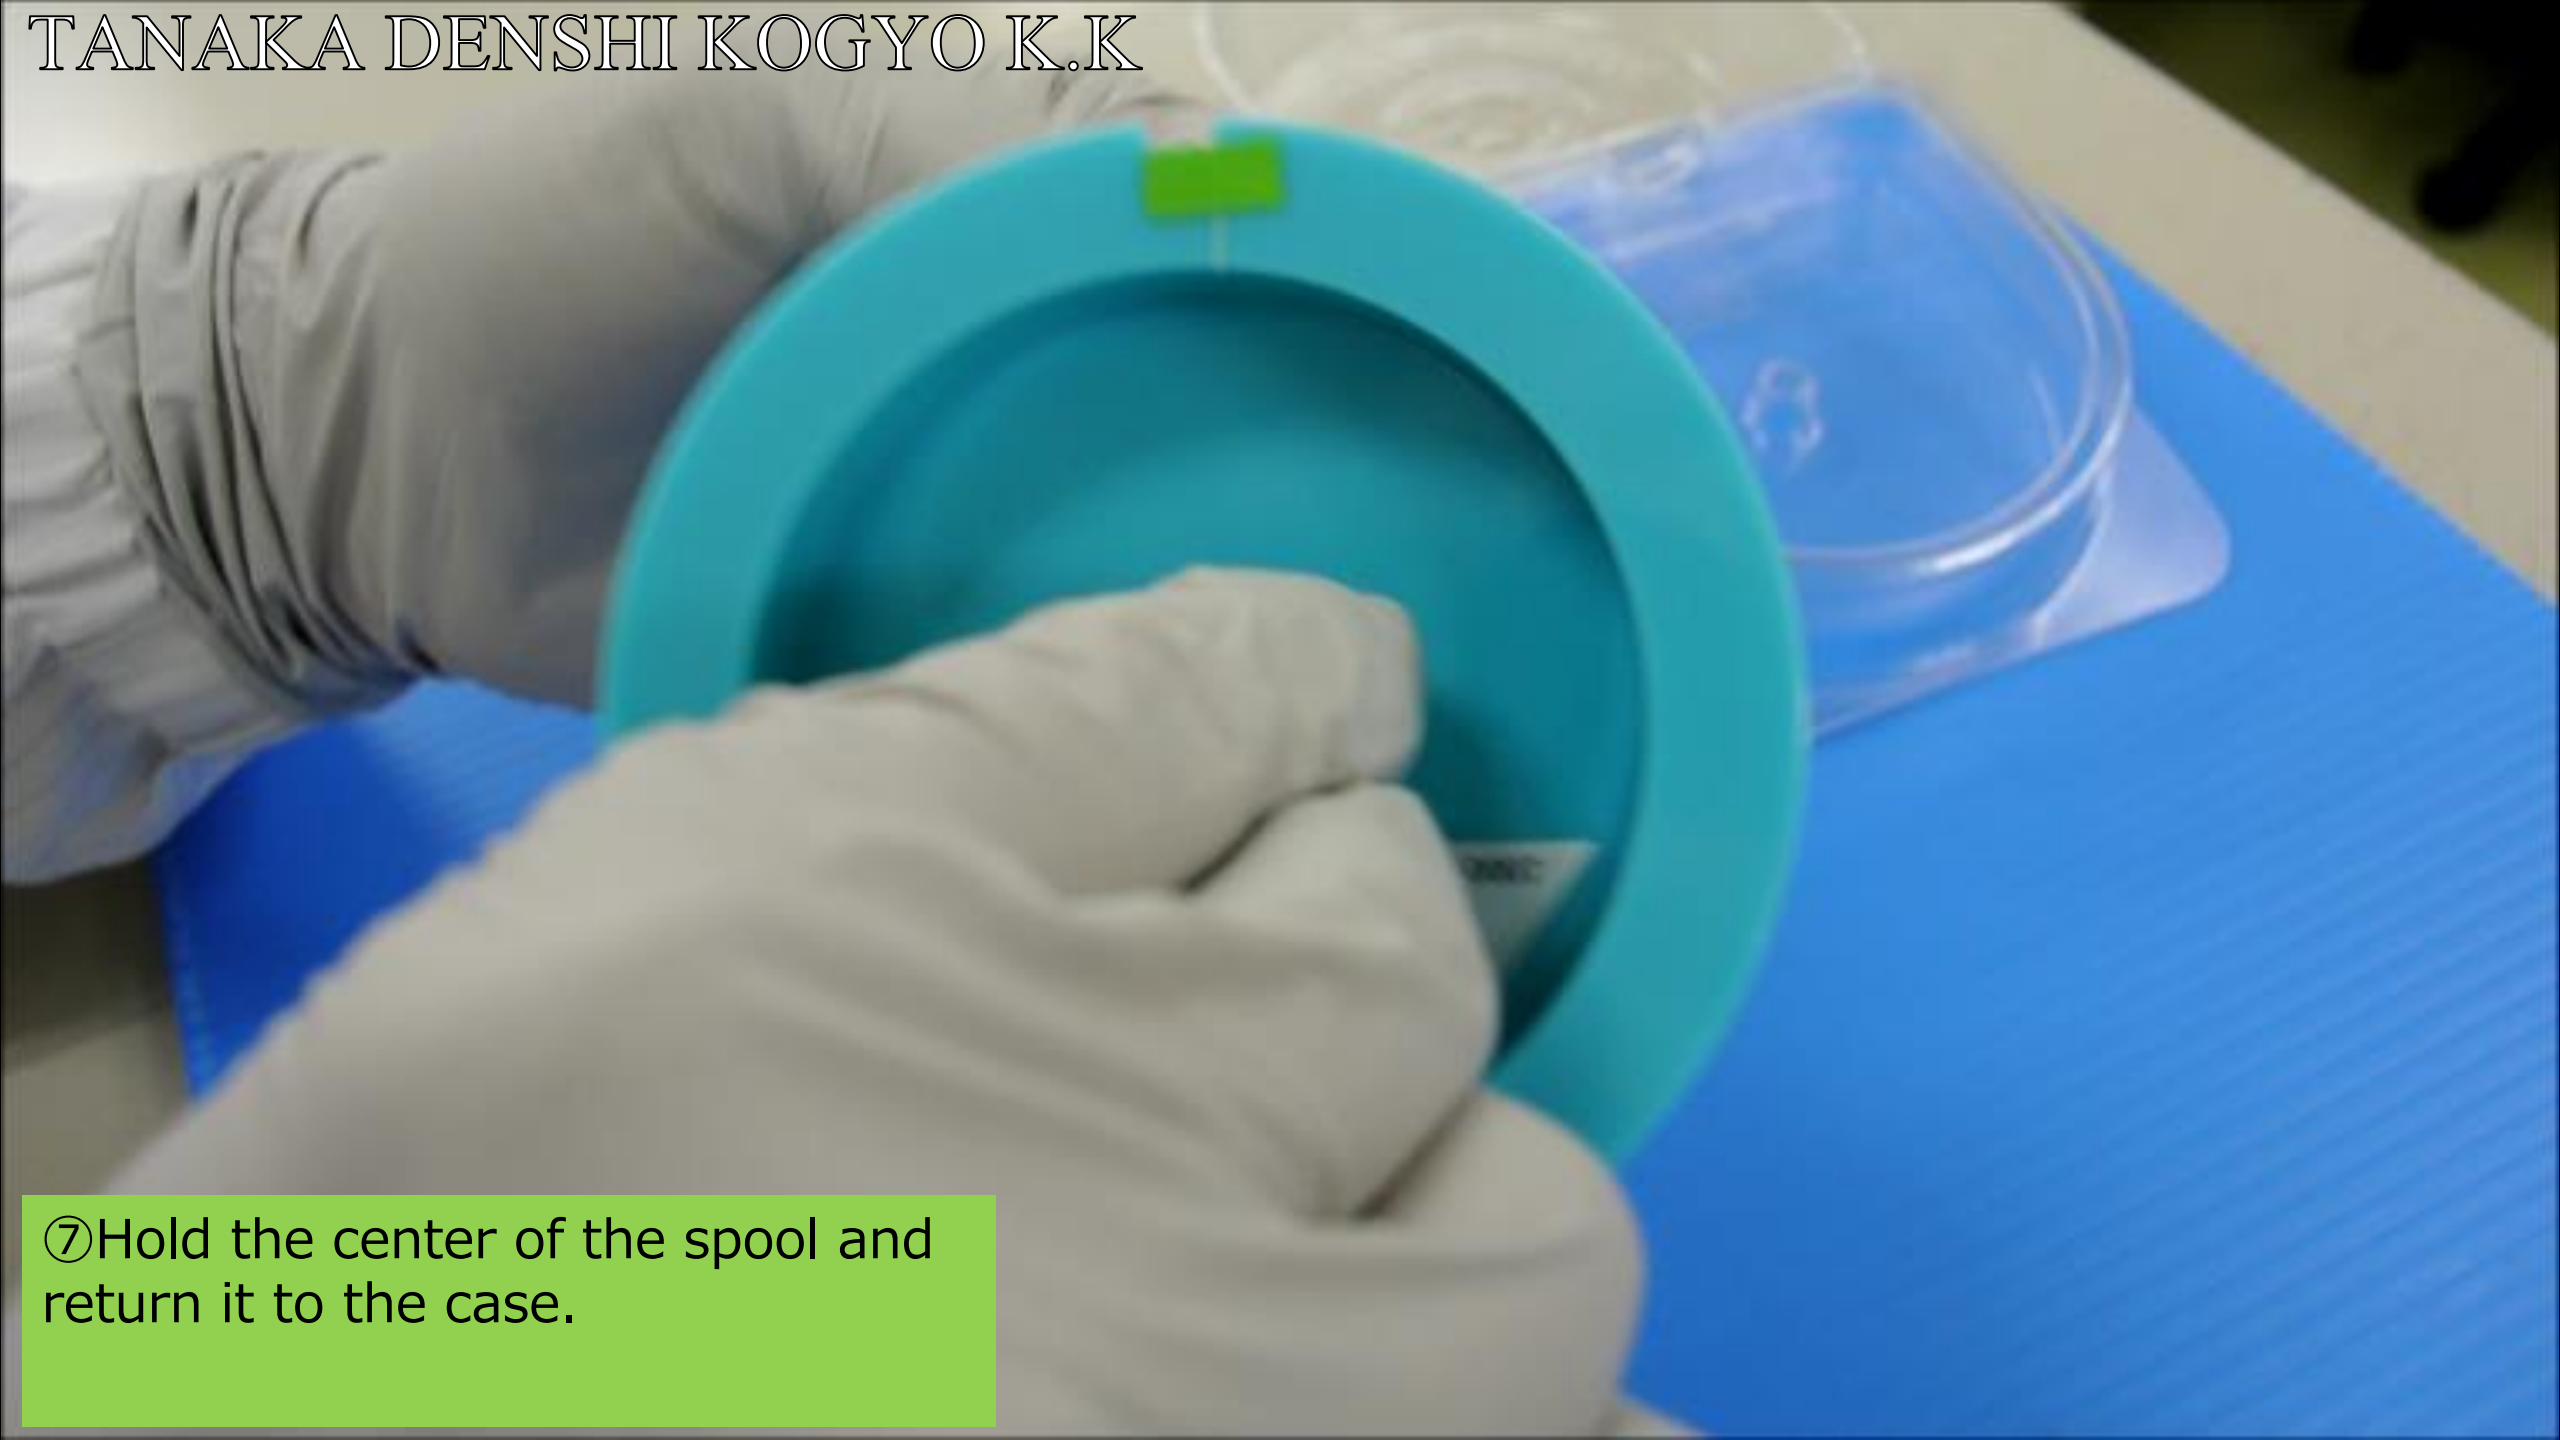

⑦ Hold the center of the spool and return it to the case.



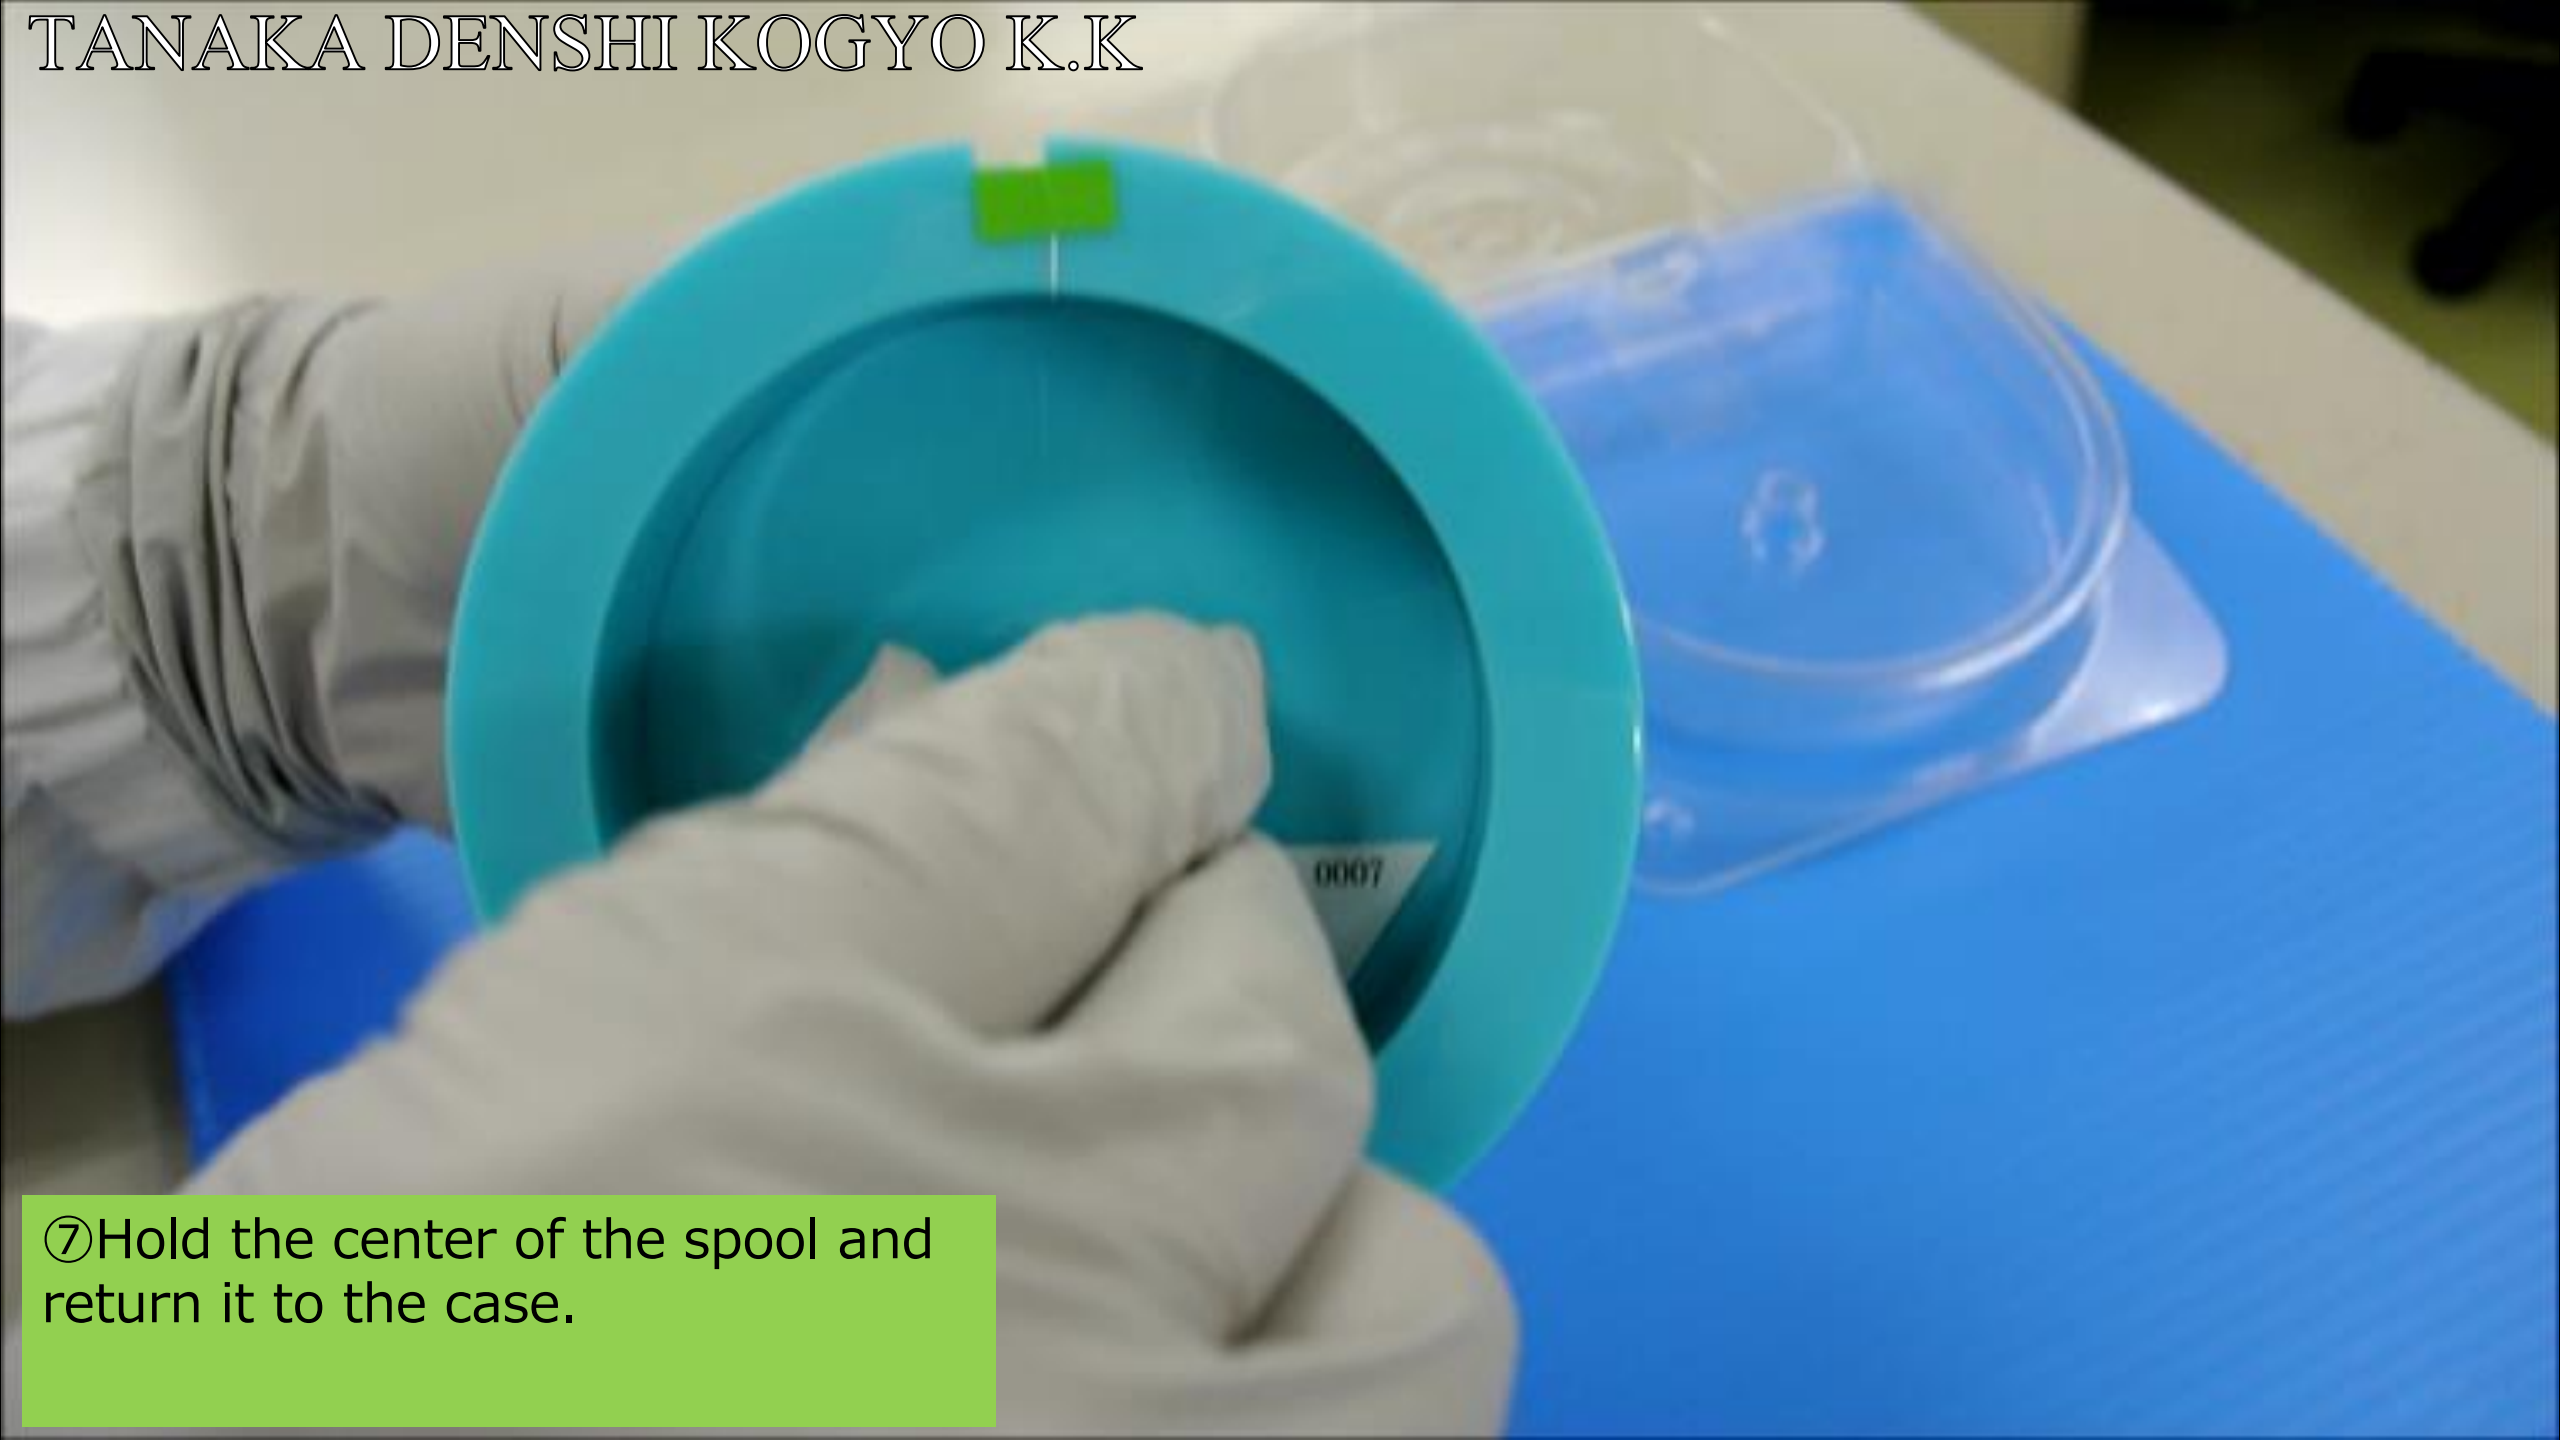

⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.





⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑦ Hold the center of the spool and return it to the case.



⑧ Close the cover.



⑧Close the cover.





⑧Close the cover.



⑧ Close the cover.



⑧ Close the cover.



⑧ Close the cover.



⑧Close the cover.



⑧ Close the cover.