


# Instruction


## Removing a spool from a case (#88K ver.)

TANAKA DENSHI KOGYO K.K  
Quality Assurance Dpt.



①Pull the plastic lid from "OPEN" at the edge while holding the case with fingers.

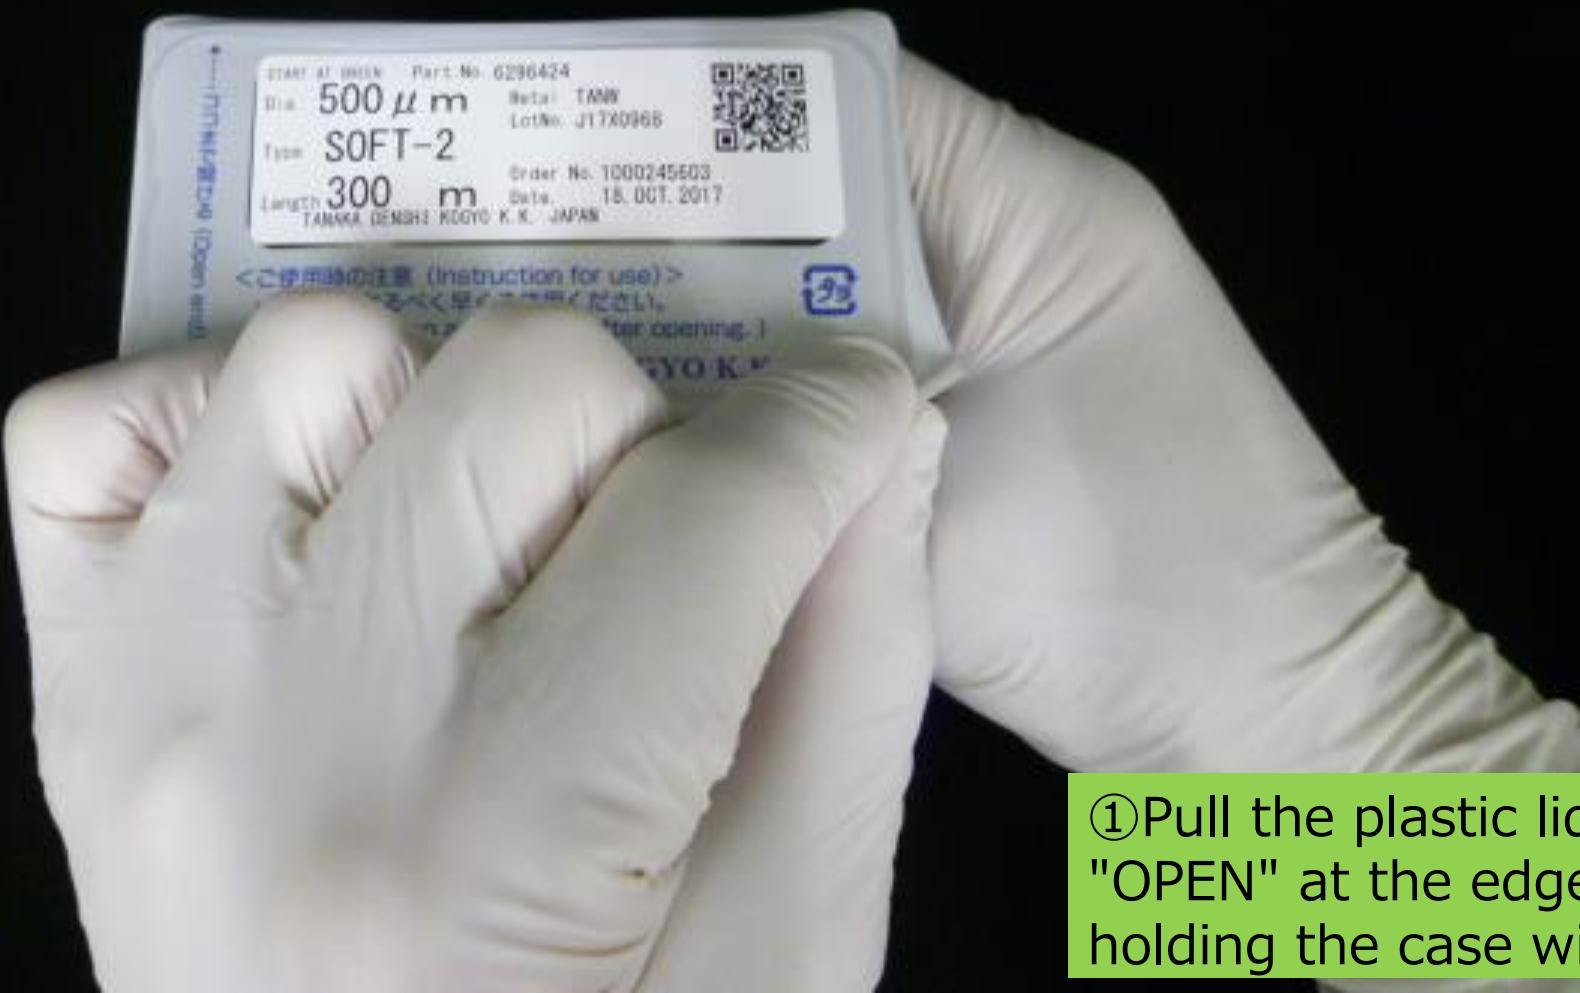

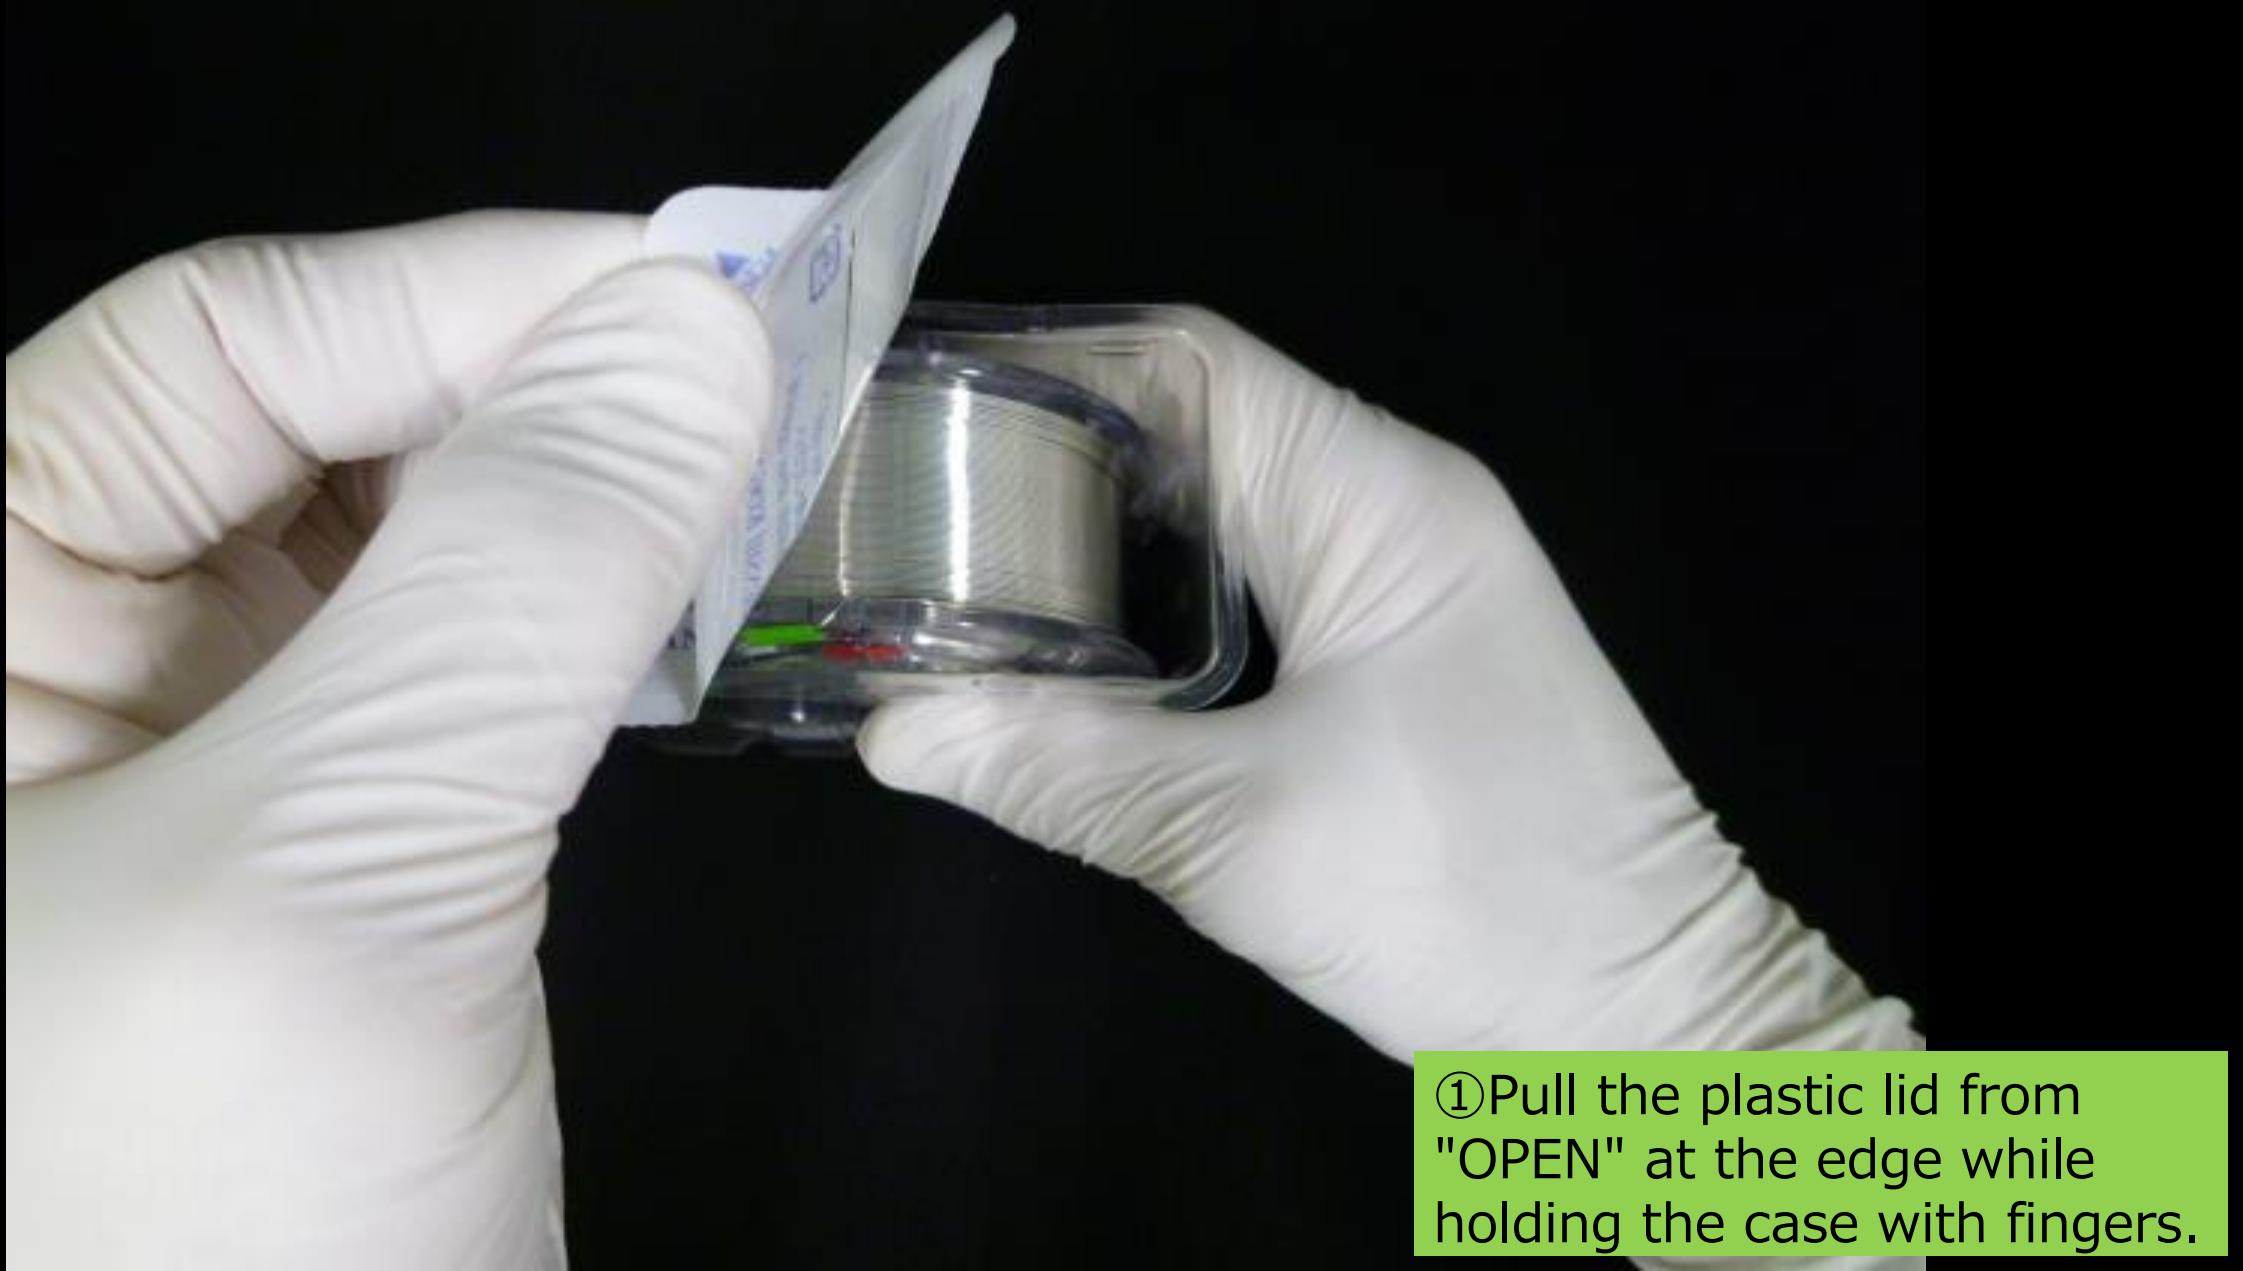

①Pull the plastic lid from "OPEN" at the edge while holding the case with fingers.




①Pull the plastic lid from "OPEN" at the edge while holding the case with fingers.




① Pull the plastic lid from "OPEN" at the edge while holding the case with fingers.




①Pull the plastic lid from "OPEN" at the edge while holding the case with fingers.

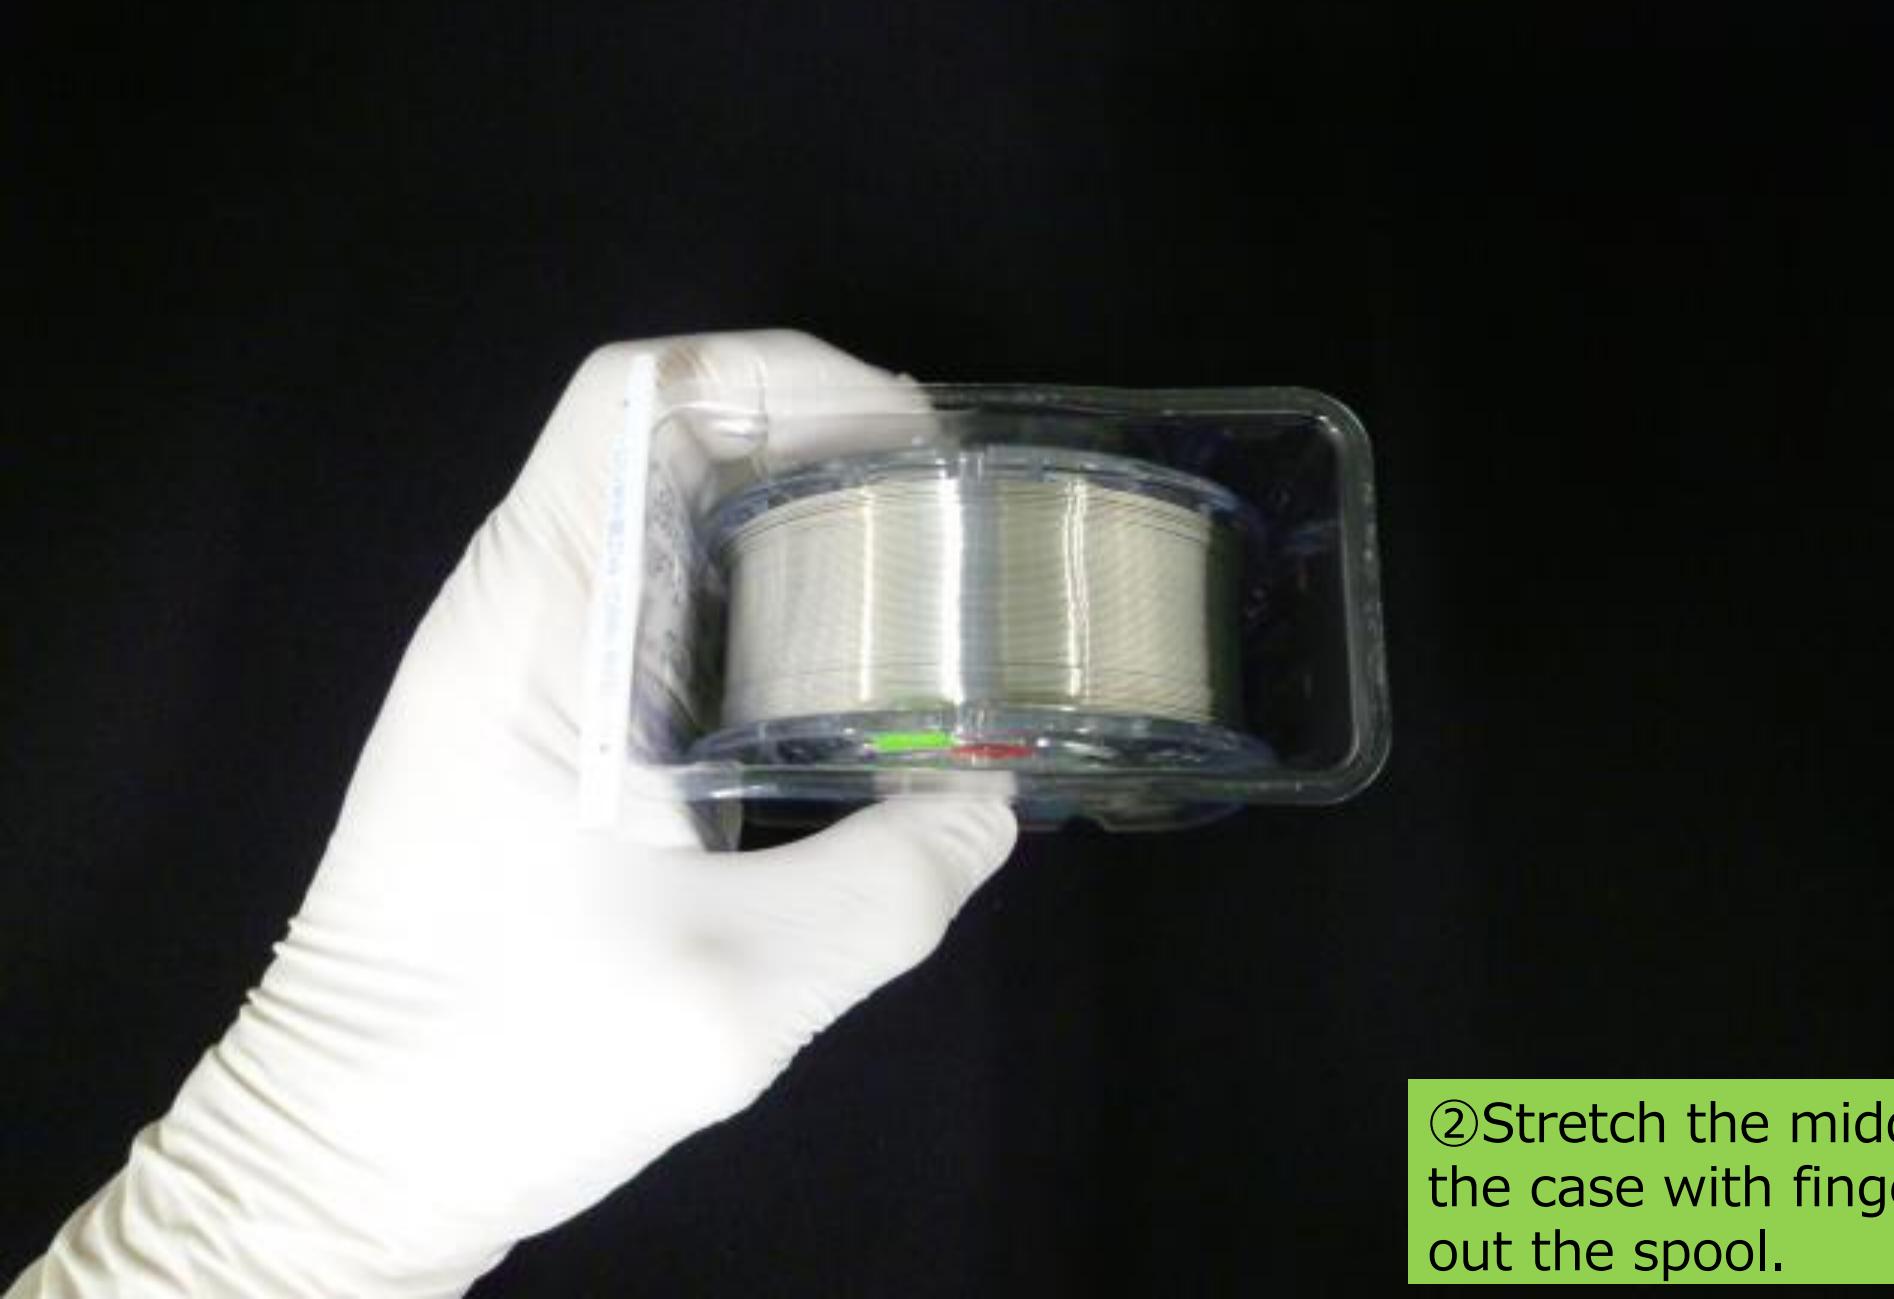


②Stretch the middle part of the case with fingers and pull out the spool.

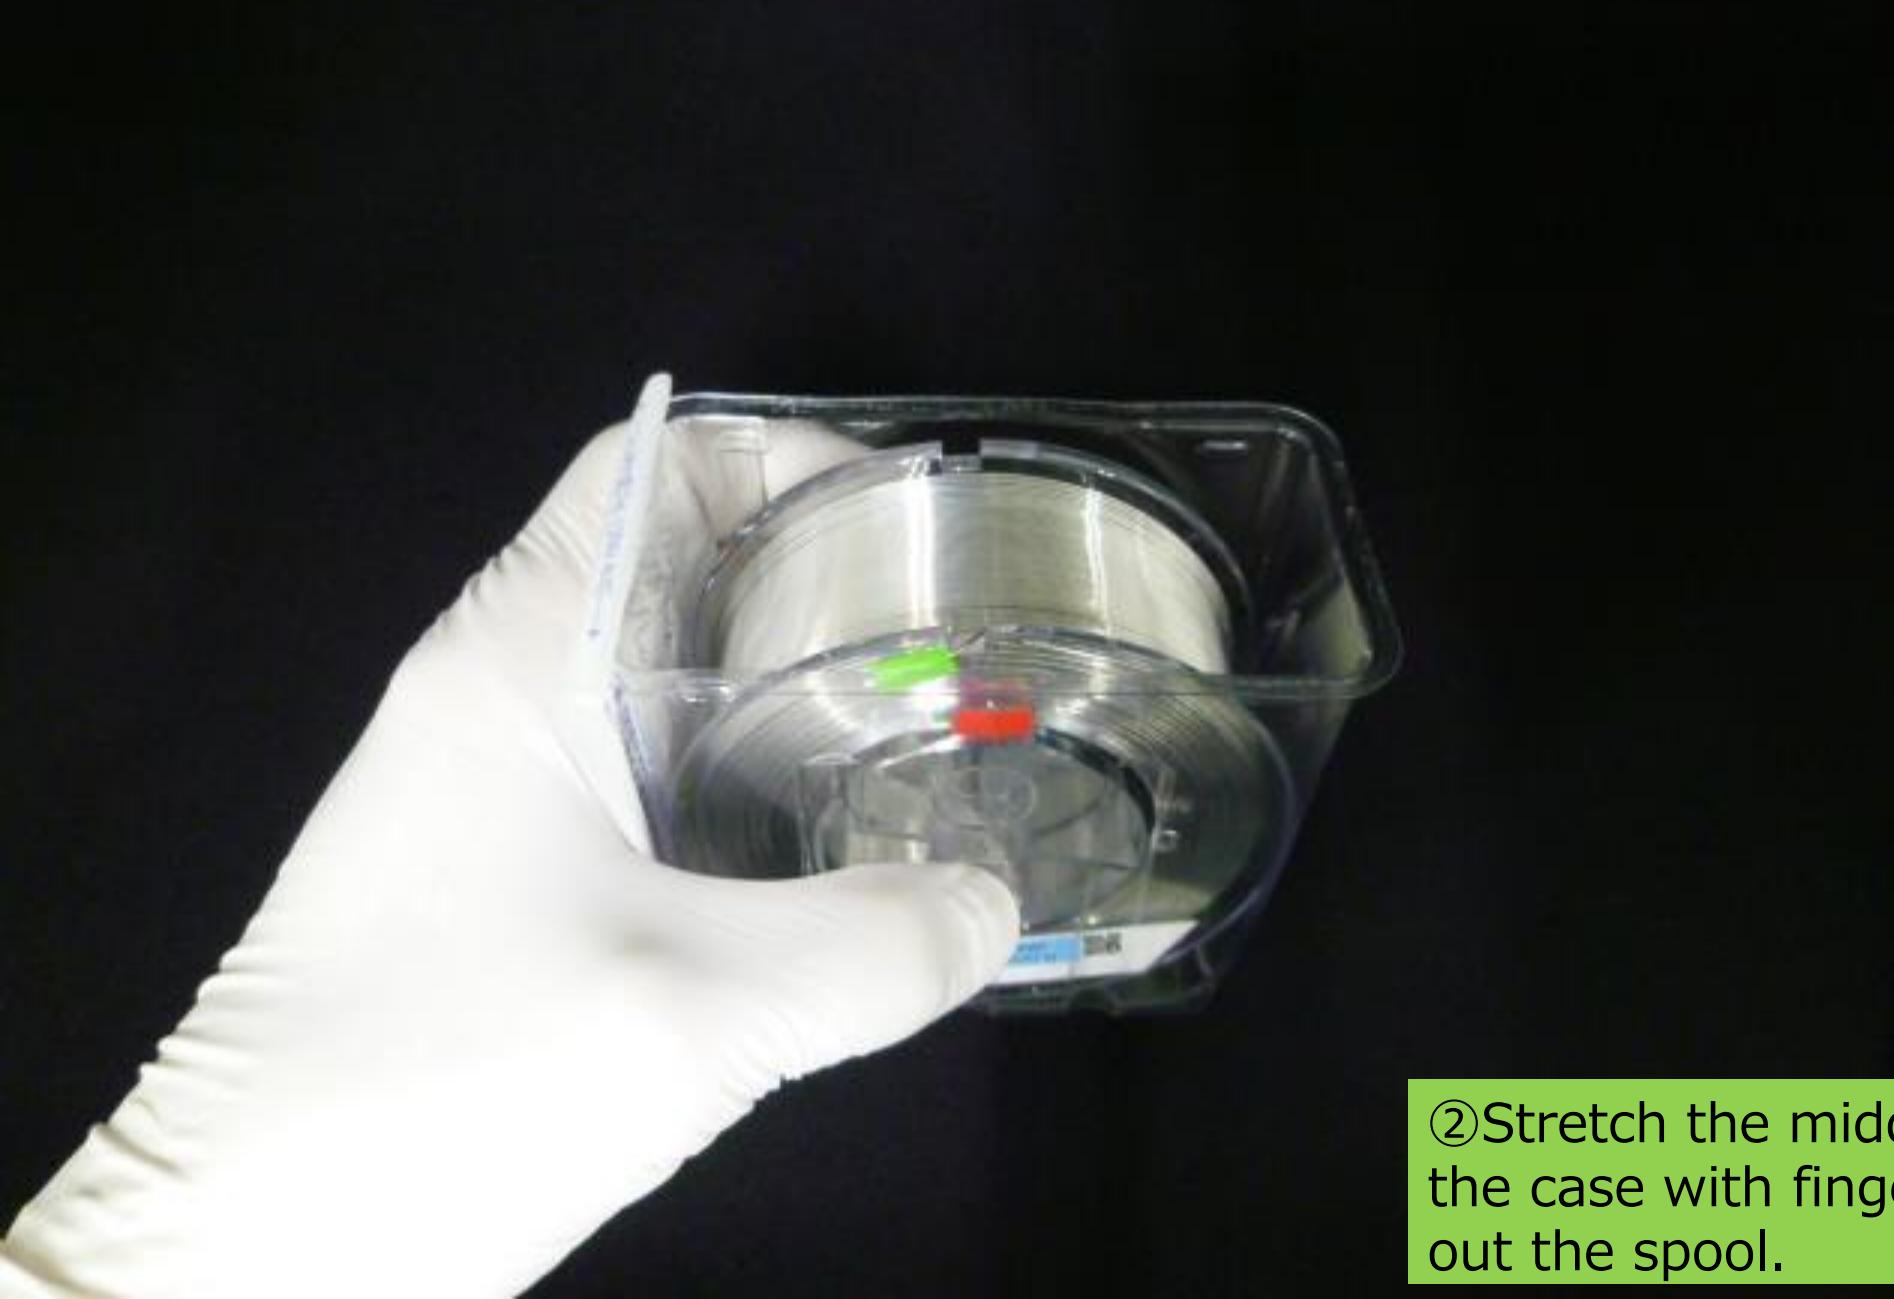

②Stretch the middle part of the case with fingers and pull out the spool.

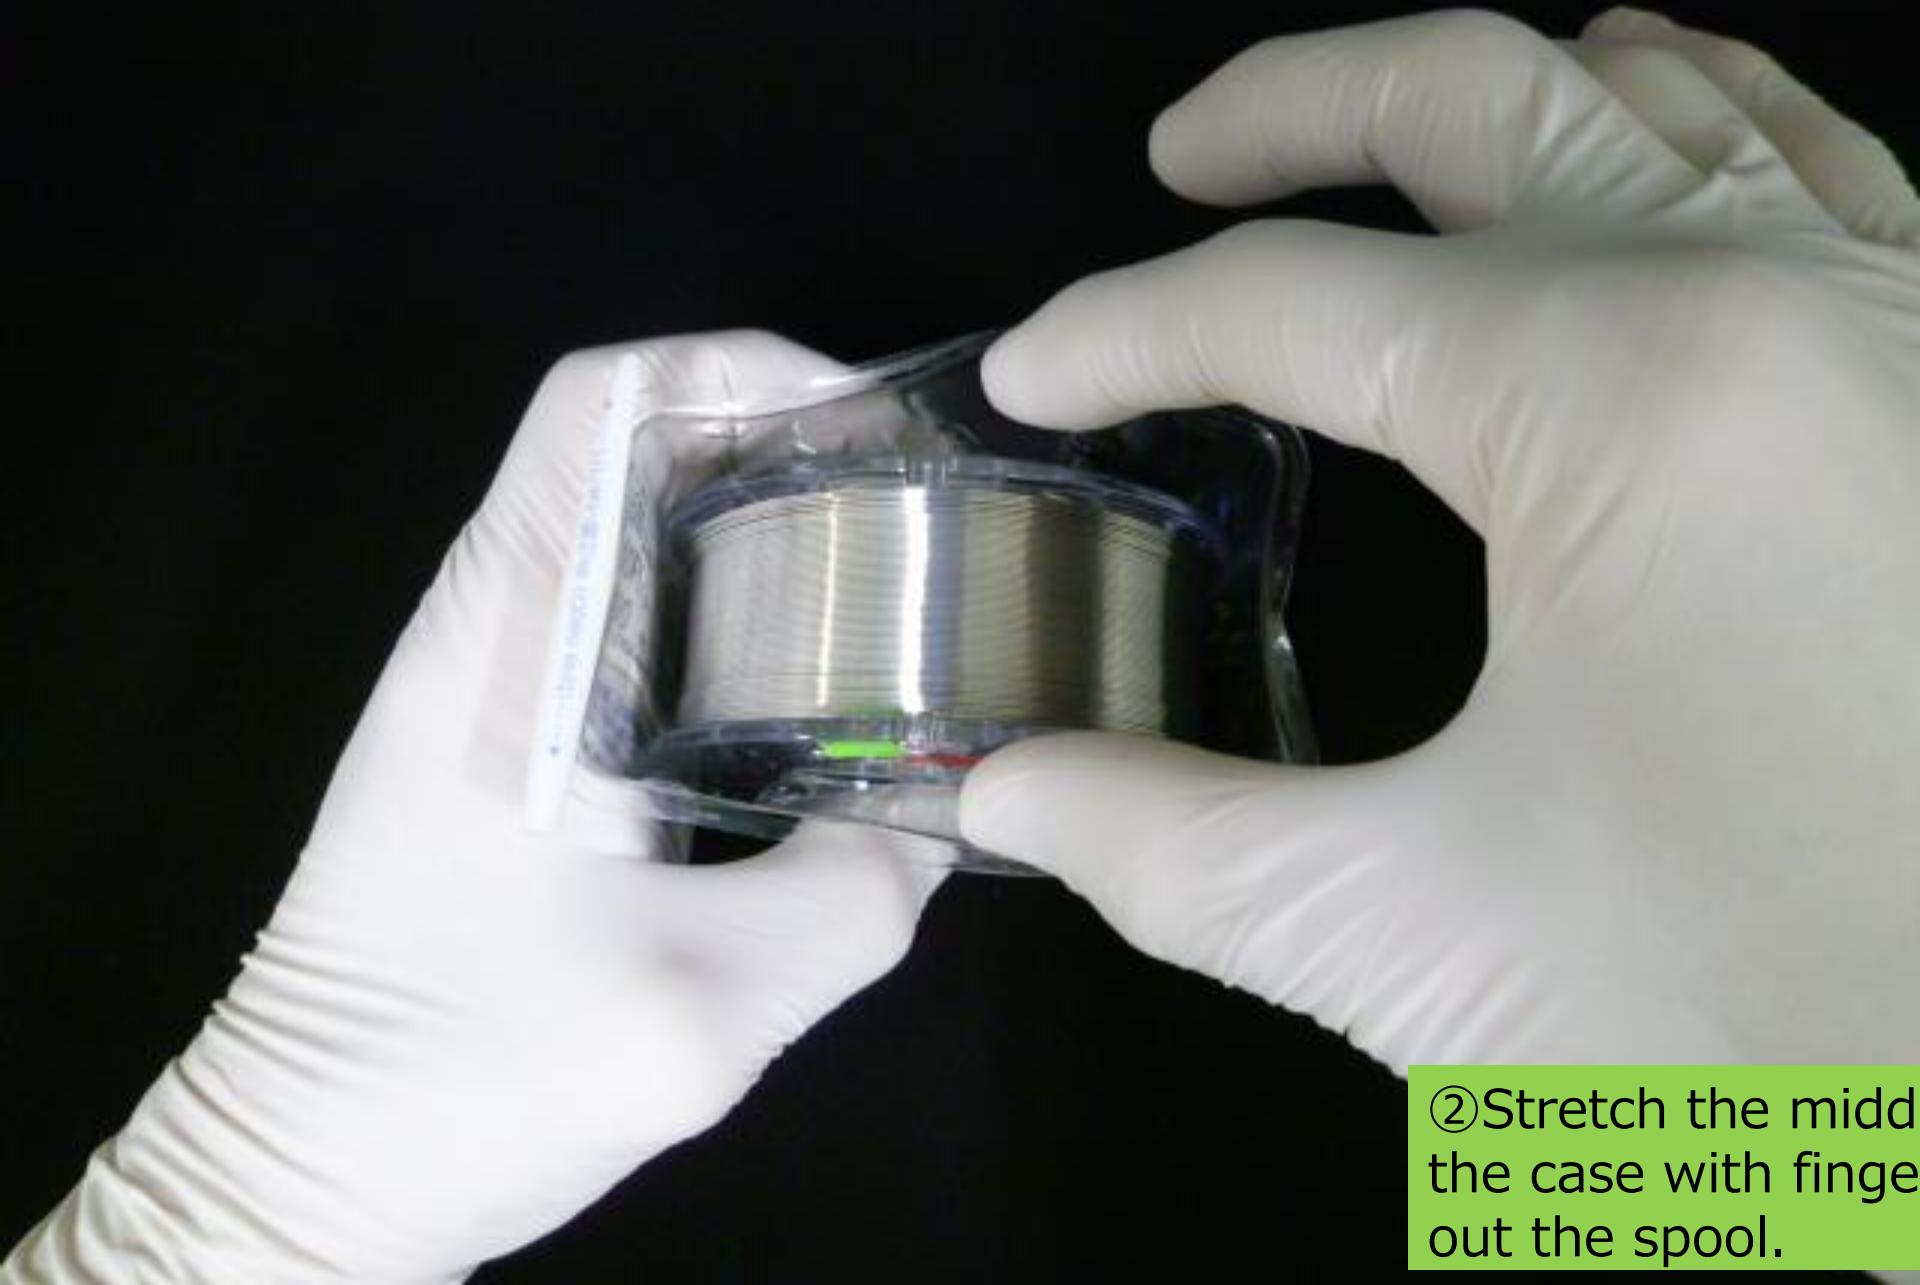


②Stretch the middle part of  
the case with fingers and pull  
out the spool.

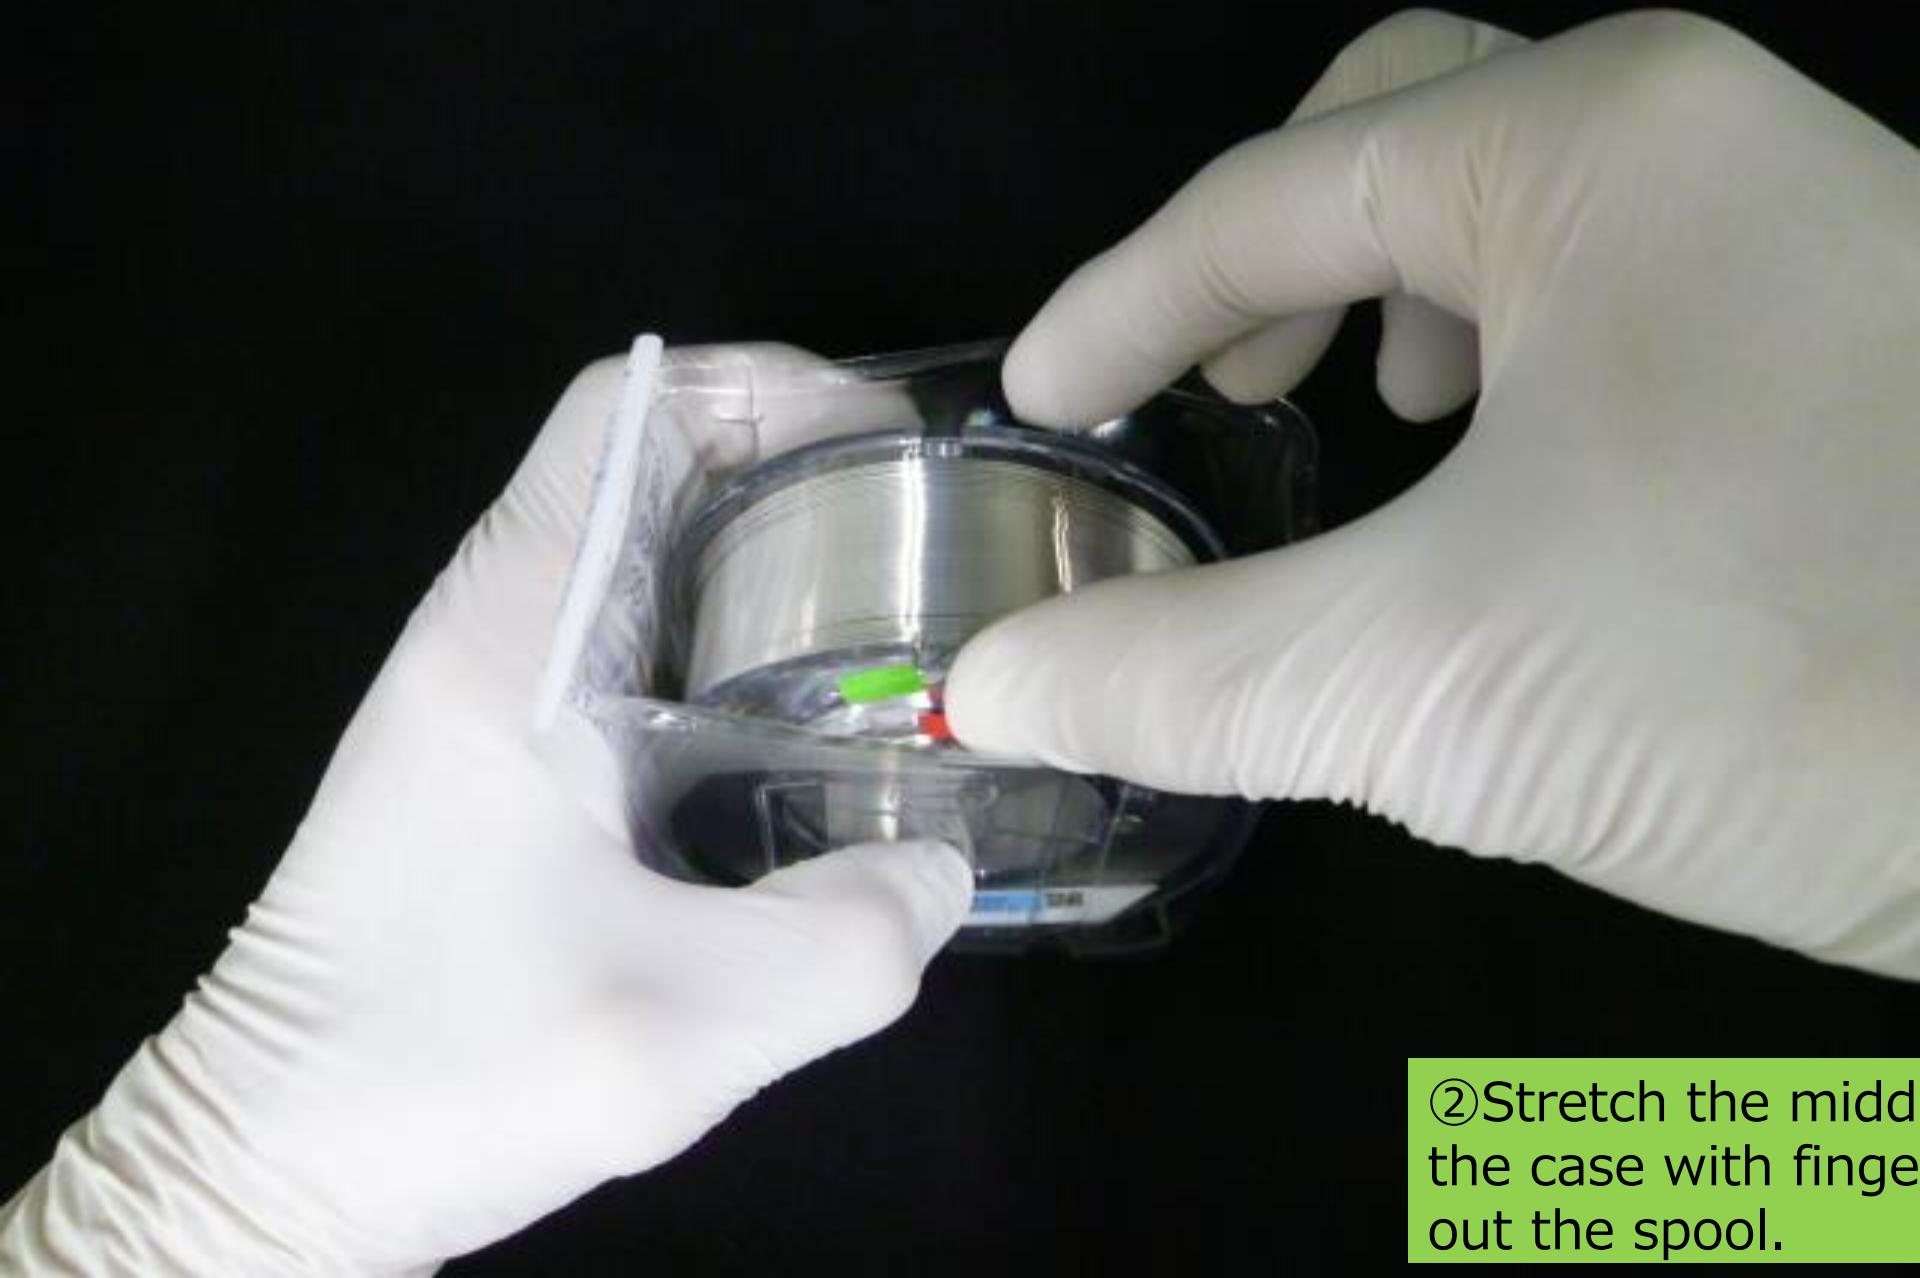

②Stretch the middle part of the case with fingers and pull out the spool.



②Stretch the middle part of the case with fingers and pull out the spool.

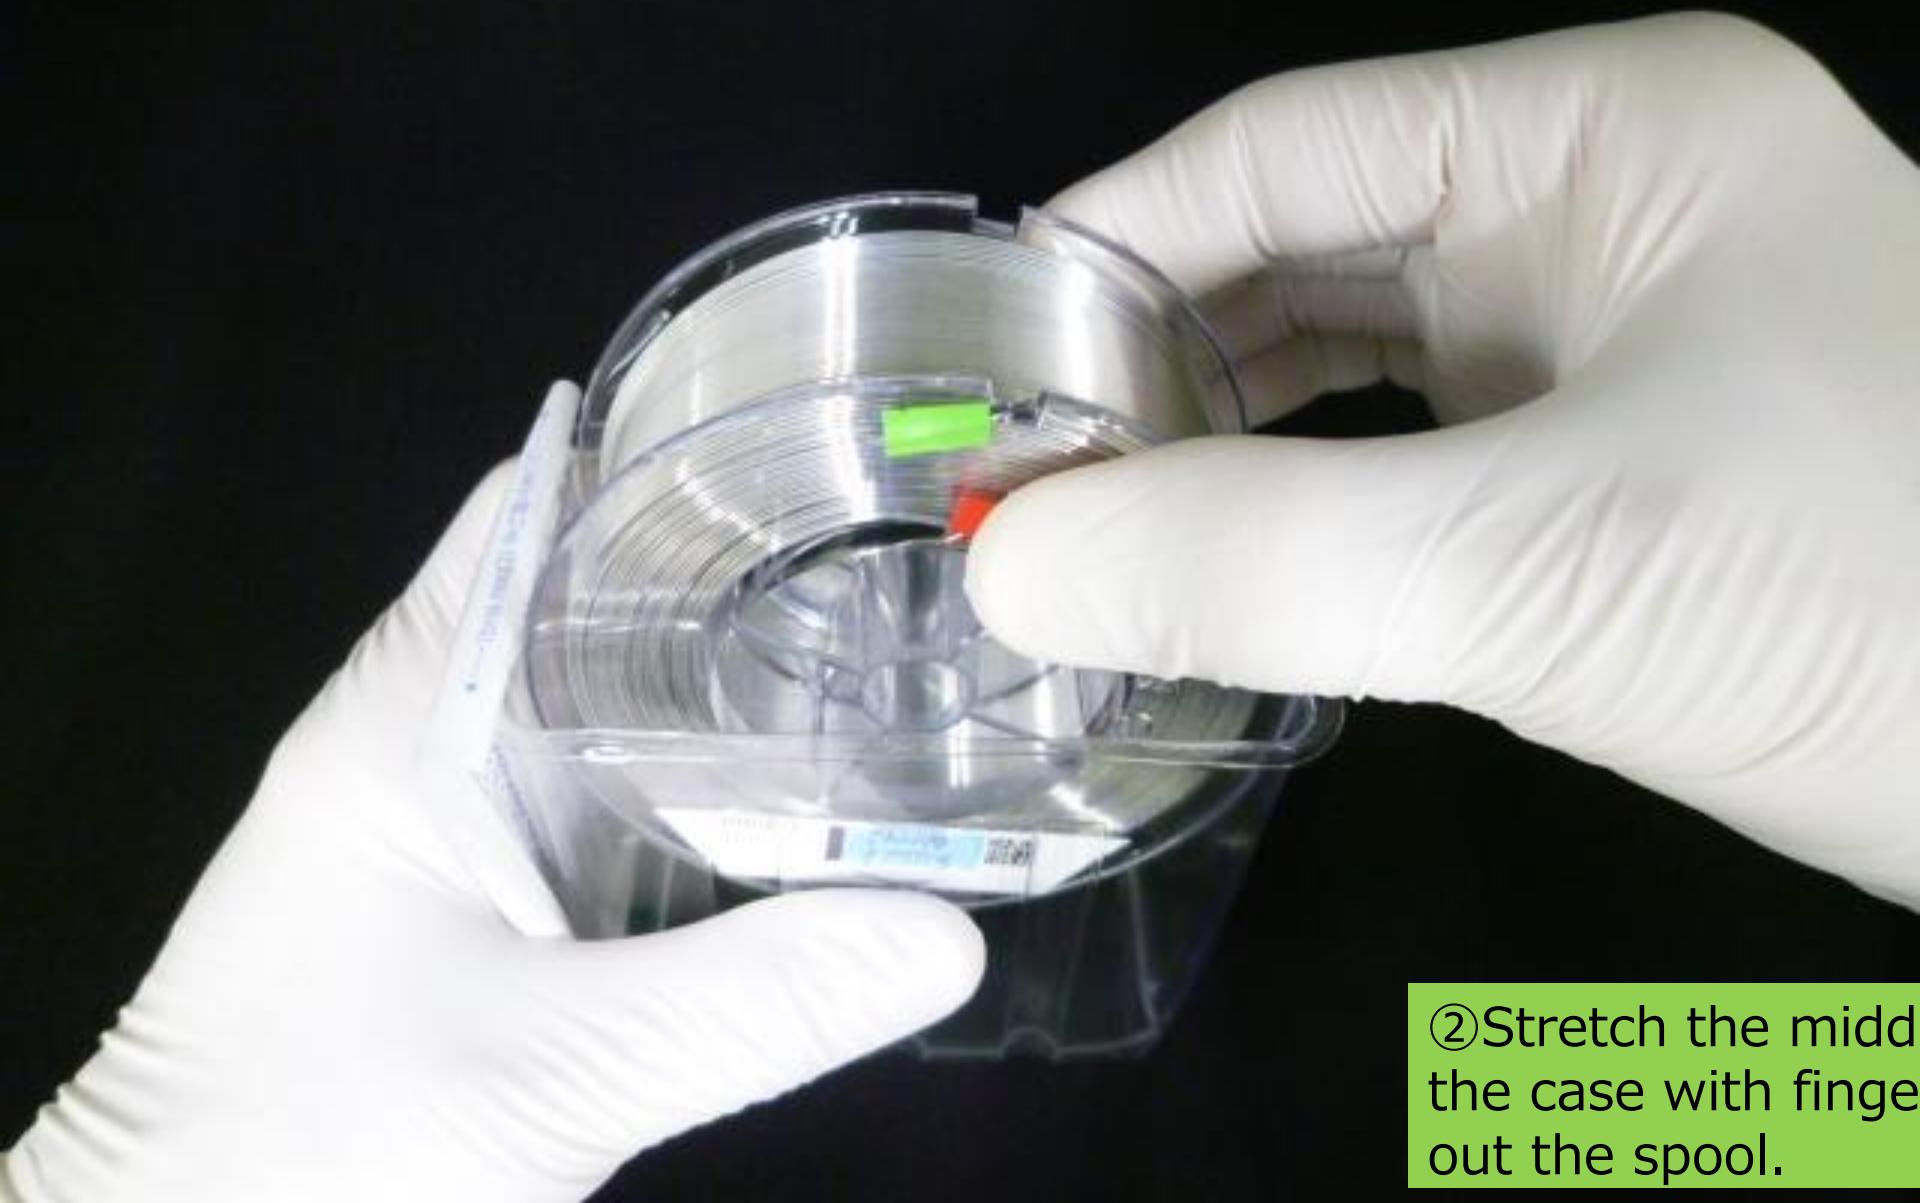


②Stretch the middle part of the case with fingers and pull out the spool.



②Stretch the middle part of the case with fingers and pull out the spool.



③Hold the center of the spool  
and set it to the bonding  
machine.

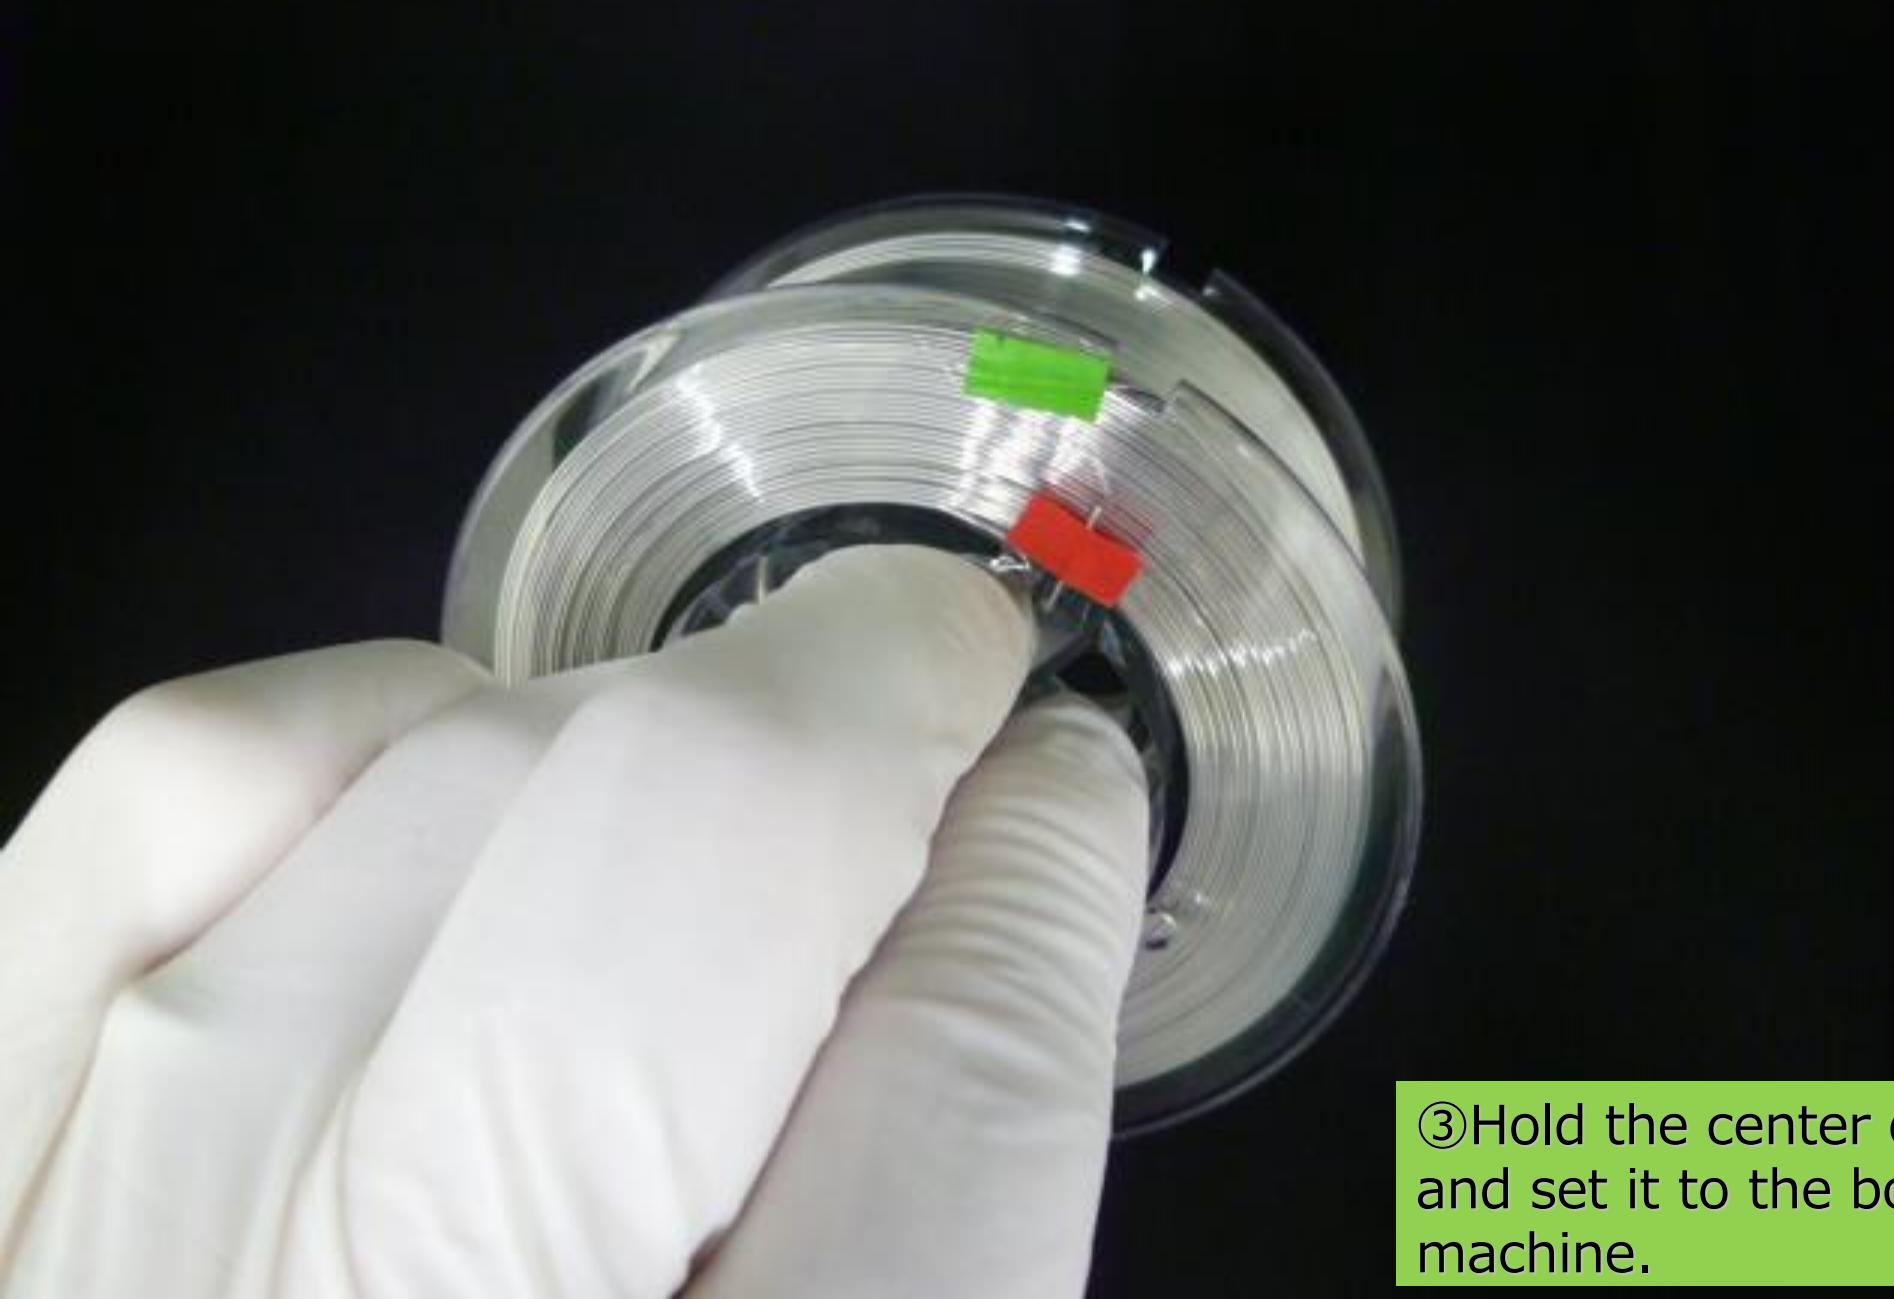

③Hold the center of the spool  
and set it to the bonding  
machine.